

Local Law Filing

(Use this form to file a local law with the Secretary of State.)

Text of law should be given as amended. Do not include matter being eliminated and do not use italics or underlining to indicate new matter.

County City Town Village
(Select one.)

of Town of Greece

Local Law No. 2 of the year 20²⁴

A local law Amendment to Update the Flood Damage Prevention Requirements
(Insert Title)

Be it enacted by the Town Board of the
(Name of Legislative Body)

County City Town Village
(Select one.)

of Greece as follows:

[see attached page(s)]

(If additional space is needed, attach pages the same size as this sheet, and number each.)

(Complete the certification in the paragraph that applies to the filing of this local law and strike out that which is not applicable.)

1. (Final adoption by local legislative body only.)

I hereby certify that the local law annexed hereto, designated as local law No. 2 of 2024 of the (County)(City)(Town)(Village) of the Town of Greece was duly passed by the Town Board of the Town of Greece on June 20 2024, in accordance with the applicable provisions of law.
(Name of Legislative Body)

2. (Passage by local legislative body with approval, no disapproval or repassage after disapproval by the Elective Chief Executive Officer*.)

I hereby certify that the local law annexed hereto, designated as local law No. _____ of 20____ of the (County)(City)(Town)(Village) of _____ was duly passed by the _____ on _____ 20____, and was (approved)(not approved) _____
(Name of Legislative Body)
(repassed after disapproval) by the _____ and was deemed duly adopted
(Elective Chief Executive Officer)*
on _____ 20____, in accordance with the applicable provisions of law.

3. (Final adoption by referendum.)

I hereby certify that the local law annexed hereto, designated as local law No. _____ of 20____ of the (County)(City)(Town)(Village) of _____ was duly passed by the _____ on _____ 20____, and was (approved)(not approved) _____
(Name of Legislative Body)
(repassed after disapproval) by the _____ on _____ 20____.
(Elective Chief Executive Officer)*

Such local law was submitted to the people by reason of a (mandatory)(permissive) referendum, and received the affirmative vote of a majority of the qualified electors voting thereon at the (general)(special)(annual) election held on _____ 20____, in accordance with the applicable provisions of law.

4. (Subject to permissive referendum and final adoption because no valid petition was filed requesting referendum.)

I hereby certify that the local law annexed hereto, designated as local law No. _____ of 20____ of the (County)(City)(Town)(Village) of _____ was duly passed by the _____ on _____ 20____, and was (approved)(not approved) _____
(Name of Legislative Body)
(repassed after disapproval) by the _____ on _____ 20____. Such local
(Elective Chief Executive Officer)*
law was subject to permissive referendum and no valid petition requesting such referendum was filed as of _____ 20____, in accordance with the applicable provisions of law.

* Elective Chief Executive Officer means or includes the chief executive officer of a county elected on a county-wide basis or, if there be none, the chairperson of the county legislative body, the mayor of a city or village, or the supervisor of a town where such officer is vested with the power to approve or veto local laws or ordinances.

5. ~~(City local law concerning Charter revision proposed by petition.)~~


~~I hereby certify that the local law annexed hereto, designated as local law No. _____ of 20____ of the City of _____ having been submitted to referendum pursuant to the provisions of section (36)(37) of the Municipal Home Rule Law, and having received the affirmative vote of a majority of the qualified electors of such city voting thereon at the (special)(general) election held on _____ 20____, became operative.~~

6. ~~(County local law concerning adoption of Charter.)~~

~~I hereby certify that the local law annexed hereto, designated as local law No _____ of 20____ of the County of _____ State of New York, having been submitted to the electors at the General Election of November _____ 20____, pursuant to subdivisions 5 and 7 of section 33 of the Municipal Home Rule Law, and having received the affirmative vote of a majority of the qualified electors of the cities of said county as a unit and a majority of the qualified electors of the towns of said county considered as a unit voting at said general election, became operative.~~

(If any other authorized form of final adoption has been followed, please provide an appropriate certification.)

I further certify that I have compared the preceding local law with the original on file in this office and that the same is a correct transcript therefrom and of the whole of such original local law, and was finally adopted in the manner indicated in paragraph, 1 above.


Clerk of the county legislative body, City, Town or Village Clerk or officer designated by local legislative body

Date: July 15, 2024

(Seal)

#185a - Councilman DiPonzio offered the following resolution and moved its adoption; seconded by Councilman Murphy:

LOCAL LAW # 2 OF THE YEAR 2024

**AMENDMENT TO UPDATE THE FLOOD DAMAGE PREVENTION
REQUIREMENTS**

SEQRA RESOLUTION

WHEREAS, the Town of Greece Town Board (the “Town Board”) has proposed to adopt amendments to Chapter 117 (Flood Damage Prevention) (the “Flood Damage Prevention Ordinance”) to the Code of the Town of Greece pursuant to the New York State Constitution Article IX, Section 2, and New York State Environmental Conservation Law, Article 36; and

WHEREAS, the Town Board makes the following findings:

- 1) In summary, the Proposal is due to proposed updates by the Federal Emergency Management Agency (FEMA) to Flood Insurance Rate Maps (FIRMs) and Flood Insurance Study (FIS) for the Lake Ontario shoreline and adjoining areas.
- 2) The proposed amendments to the Flood Damage Prevention Ordinance would repeal and replace the existing Flood Damage Prevention Ordinance of the Town of Greece which was adopted and enacted by Town Board resolution on April 16, 2002, and amended in its entirety by Town Board resolution June 19, 2018.
- 3) In general, the proposed amendments to the Flood Damage Prevention Ordinance is designed to accomplish the following:
 - a. As required by FEMA, adopt proposed updates to FIRMs and FIS for the Lake Ontario shoreline and adjoining areas.
 - b. Fix ambiguities related to Town of Greece flood zone.
- 4) According to the New York State Environmental Conservation Law, Article 8, (State Environmental Quality Review Act), and 6 NYCRR Part 617 *et seq.*, the implementing regulations therefor (the “SEQRA Regulations”), the action is classified as a Type I action.
- 5) In accordance with the SEQRA Regulations, the Town Board is designated as the lead agency in the environmental review of the Proposal.
- 6) Draft of the proposed amendments to the Flood Damage Prevention Ordinance were made available for public review on May 17, 2024.
- 7) On May 16, 2024, at 6:23 p.m. at Greece Town Hall, 1 Vince Tofany Boulevard, the Town Board held a public hearing (the “Hearing”) to consider the proposed amendments to the Flood Damage Prevention Ordinance, at which time all persons and organizations in interest were heard. Documentary, testimonial, and other

evidence were presented at the Hearing for the Town Board's consideration. At the conclusion of the Hearing, the Town Board continued the hearing to June 20, 2024, to allow for an additional public comment period and to allow review of the proposed amendments to the Flood Damage Prevention Ordinance by the New York State Department of Environmental Conservation (NYSDEC).

- 8) The Town Board carefully has considered the Proposal and additional information submitted by the town's own staff, including, but not limited to oral or written descriptions of the Proposal; and various oral or written comments that resulted from telephone conversations, meetings, or written correspondence from or with the town's own staff.
- 9) The Town Board carefully has considered information, recommendations, and comments that resulted from telephone conversations, meetings, or written correspondence with various interested agencies, including but not limited: the Monroe County Department of Planning and Development; the New York State Department of Environmental Conservation; and the Federal Emergency Management Agency.
- 10) The Town Board carefully has considered information, recommendations, and comments that resulted from telephone conversations, meetings, or written correspondence from or with persons and organizations in interests, and all other comments submitted to the Town Board.
- 11) The Town Board's determination has been carefully considered and is supported by substantial evidence set forth in Part 2 of the EAF.
- 12) The Town Board acknowledges that subsequent Actions which may be approved by the town pursuant to the regulations set out in the proposed amendments to the Flood Damage Prevention Ordinance may be subject to individual SEQRA review, whereby individual impacts resulting from development will be more thoroughly be examined.
- 13) The Town Board has met the procedural and substantive requirements of the SEQRA regulations and has taken a "hard look" at the relevant environmental issues.

NOW, THEREFORE, be it

RESOLVED that, pursuant to the SEQRA regulations based on the aforementioned information, documentation, and findings, and after examining the relevant environmental issues, information and comments obtained during the review, comments obtained during public hearing, comments and recommendations from agencies and the town's own staff, that the Town Board determines that the Proposal will not have a significant adverse impact on the environment, which constitutes a negative declaration pursuant to the SEQRA regulations.

ADOPTED: Ayes 5 Reilich, DiPonzio, Bloomer, Murphy, Christodaro
 Nays 0

#185b - Councilman DiPonzio offered the following resolution and moved its adoption; seconded by Councilman Murphy:

LOCAL LAW # 2 OF THE YEAR 2024

**AMENDMENT TO UPDATE THE FLOOD DAMAGE PREVENTION
REQUIREMENTS**

MOTION TO ADOPT

BE IT ENACTED, by the Town Board of the Town of Greece, Monroe County, State of New York, as follows:

Chapter 117 of the Code of the Town of Greece (the "Town code") entitled "Flood Damage Prevention" shall be amended by deleting Chapter 117 of the Town Code in its entirety and replacing it with new Chapter 117 of the Town Code, as follows:

ARTICLE I

Statutory Authorization and Purpose

§117-1. Findings.

The Town Board of the Town of Greece finds that the potential and/or actual damages from flooding and erosion may be a problem to the residents of the Town of Greece and that such damages may include: destruction or loss of private and public housing, damage to public facilities, both publicly and privately owned, and injury to and loss of human life. In order to minimize the threat of such damages and to achieve the purposes and objectives hereinafter set forth, this local law is adopted.

§117-2. Statement of purpose.

It is the purpose of this local law to promote the public health, safety, and general welfare, and to minimize public and private losses due to flood conditions in specific areas by provisions designed to:

- A. Regulate uses which are dangerous to health, safety and property due to water or erosion hazards, or which result in damaging increases in erosion or in flood heights or velocities;
- B. Require that uses vulnerable to floods, including facilities which serve such uses, be protected against flood damage at the time of initial construction;
- C. Control the alteration of natural floodplains, stream channels, and natural protective barriers which are involved in the accommodation of flood waters;
- D. Control filling, grading, dredging and other development which may increase erosion or flood damages;

- E. Regulate the construction of flood barriers which will unnaturally divert flood waters or which may increase flood hazards to other lands, and;
- F. Qualify and maintain for participation in the National Flood Insurance Program.

§117-3. Objectives

The objectives of this chapter are:

- A. To protect human life and health;
- B. To minimize expenditure of public money for costly flood control projects;
- C. To minimize the need for rescue and relief efforts associated with flooding and generally undertaken at the expense of the general public;
- D. To minimize prolonged business interruptions;
- E. To minimize damage to public facilities and utilities such as water and gas mains, electric, telephone, sewer lines, streets and bridges located in areas of special flood hazard;
- F. To help maintain a stable tax base by providing for the sound use and development of areas of special flood hazard so as to minimize future flood blight areas;
- G. To provide that developers are notified that property is in an area of special flood hazard; and,
- H. To ensure that those who occupy the areas of special flood hazard assume responsibility for their actions.

ARTICLE II Definitions

Unless specifically defined below, words or phrases used in this chapter shall be interpreted so as to give them the meaning they have in common usage and to give this chapter its most reasonable application.

§117-4. Definitions.

As used in this chapter, the following terms shall have the means indicated:

100-YEAR FLOOD– Has the same meaning as “base flood”

ACCESSORY STRUCTURE - A structure used solely for parking (two-car detached garages or smaller) or limited storage, represent a minimal investment of not more than 10-percent of the value of the primary structure, and may not be used for human habitation.

APPEAL –A request for a review of the Local Administrator’s interpretation of any provision of this chapter or a request for a variance.

AREA OF SHALLOW FLOODING - A designated AO, AH or VO Zone on a community's FIRM with a one percent or greater annual chance of flooding to an average annual depth of one to three feet where a clearly defined channel does not exist, where the path of flooding is unpredictable and where velocity flow may be evident. Such flooding is characterized by ponding or sheet flow.

AREA OF SPECIAL FLOOD HAZARD - The land in the floodplain within a community subject to a one percent or greater chance of flooding in any given year. This area may be designated as Zone A, AE, AH, AO, A1-A30, A99, V, VO, VE, or V1-V30. It is also commonly referred to as the base floodplain or 100-year floodplain. For purposes of this Local Law, the term "special flood hazard area (SFHA)" is synonymous in meaning with the phrase "area of special flood hazard."

BASE FLOOD - The flood having a one percent (1%) chance of being equaled or exceeded in any given year.

BASEMENT - That portion of a building having its floor subgrade (below ground level) on all sides.

BREAKAWAY WALL - A wall that is not part of the structural support of the building and is intended through its design and construction to collapse under specific lateral loading forces without causing damage to the elevated portion of the building or the supporting foundation system.

BUILDING - See "Structure"

CELLAR - Has the same meaning as "Basement".

COASTAL A ZONE - An area within a SFHA, landward of a V1-V30, VE, or V zone or landward of an open coast without mapped coastal high hazard areas. In a coastal A zone, the principal source of flood must be astronomical tides, storm surges, seiches or tsunamis, not riverine flooding. During the base flood conditions, the potential for breaking wave height shall be greater than or equal to 1 ½ feet (457 mm). The inland limit of coastal A zone is (a) the Limit of Moderate Wave Action if delineated on a FIRM, or (b) designated by the authority having jurisdiction.

COASTAL HIGH HAZARD AREA- An area of special flood hazard extending from offshore to the inland limit of a primary frontal dune along an open coast and any other area subject to high velocity wave action from storms or seismic sources. The area is designated on a FIRM as Zone V1-V30, VE, VO or V.

CRAWL SPACE - An enclosed area beneath the lowest elevated floor, eighteen inches or more in height, which is used to service the underside of the lowest elevated floor. The elevation of the floor of this enclosed area, which may be of soil, gravel, concrete or other material, must be equal to or above the lowest adjacent exterior grade. The enclosed crawl space area shall be properly vented to allow for the equalization of hydrostatic forces which would be experienced during periods of flooding.

DEVELOPMENT - Any man-made change to improved or unimproved real estate, including but not limited to buildings or other structures, mining, dredging, filling, paving, excavation or drilling operations or storage of equipment or materials.

ELEVATED BUILDING - A non-basement building (i) built, in the case of a building in Zones A1-A30, AE, A, A99, AO, AH, B, C, X, or D, to have the top of the elevated floor, or in the case of a building in Zones V1-30, VE, or V, to have the bottom of the lowest horizontal structure member of the elevated floor, elevated above the ground level by means of pilings, columns (posts and piers), or shear walls parallel to the flow of the water and (ii) adequately anchored so as not to impair the structural integrity of the building during a flood of up to the magnitude of the base flood. In the case of Zones A1-A30, AE, A, A99, AO, AH, B, C, X, or D, "elevated building" also includes a building elevated by means of fill or solid foundation perimeter walls with openings sufficient to facilitate the unimpeded movement of flood waters. In the case of Zones V1-V30, VE, V, or Coastal A, "elevated building" also includes a building otherwise meeting the definition of "elevated building", even though the lower area is enclosed by means of breakaway walls that meet the federal standards.

FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) - The federal agency that administers the National Flood Insurance Program (NFIP).

FLOOD or FLOODING –

- A. A general and temporary condition of partial or complete inundation of normally dry land areas from:
 - (1) The overflow of inland or tidal waters;
 - (2) The unusual and rapid accumulation or runoff of surface waters from any source.
- B. "Flood" or "flooding" also means the collapse or subsidence of land along the shore of a lake or other body of water as a result of erosion or undermining caused by waves or currents of water exceeding anticipated cyclical levels or suddenly caused by an unusually high water level in a natural body of water, accompanied by a severe storm, or by an unanticipated force of nature, such as a flash flood or an abnormal tidal surge, or by some similarly unusual and unforeseeable event which results in flooding as defined in (1) above.

FLOOD BOUNDARY and FLOODWAY MAP (FBFM) - An official map of the community published by the Federal Emergency Management Agency as part of a riverine community's Flood Insurance Study. The FBFM delineates a Regulatory Floodway along water courses studied in detail in the Flood Insurance Study.

FLOOD ELEVATION STUDY - An examination, evaluation and determination of the flood hazards and, if appropriate, corresponding water surface elevations, or an examination, evaluation and determination of flood-related erosion hazards.

FLOOD HAZARD BOUNDARY MAP (FHBM) - An official map of a community, issued by the Federal Emergency Management Agency, where the boundaries of the areas of special flood hazard have been designated as Zone A but no flood elevations are provided.

FLOOD INSURANCE RATE MAP (FIRM) - An official map of a community, on which the Federal Emergency Management Agency has delineated both the areas of special flood hazard and the risk premium zones applicable to the community.

FLOOD INSURANCE STUDY - See "flood elevation study".

FLOODPLAIN or FLOOD-PRONE AREA - Any land area susceptible to being inundated by water from any source (see definition of "Flooding").

FLOODPROOFING - Any combination of structural and non-structural additions, changes, or adjustments to structures which reduce or eliminate flood damage to real estate or improved real property, water and sanitary facilities, structures and their contents.

FLOODWAY - Has the same meaning as "regulatory floodway".

FUNCTIONALLY DEPENDENT USE - A use which cannot perform its intended purpose unless it is located or carried out in close proximity to water, such as a docking or port facility necessary for the loading and unloading of cargo or passengers, shipbuilding, and ship repair facilities. The term does not include long-term storage, manufacturing, sales, or service facilities.

HIGHEST ADJACENT GRADE - The highest natural elevation of the ground surface, prior to construction, next to the proposed walls of a structure.

HISTORIC STRUCTURE - Any structure that is:

- A. Listed individually in listed individually in the National Register of Historic Places (a listing maintained by the Department of the Interior) or preliminarily determined by the Secretary of the Interior as meeting the requirements for individual listing on the National Register;
- B. Certified or preliminarily determined by the Secretary of the Interior as contributing to the historical significance of a registered historic district or a district preliminarily determined by the Secretary to qualify as a registered historic district;
- C. Individually listed on a state inventory of historic places in states with historic preservation programs which have been approved by the Secretary of the Interior; or
- D. Individually listed on a local inventory of historic places in communities with historic preservation programs that have been certified either:
 - (1) By an approved state program as determined by the Secretary of the Interior; or
 - (2) Directly by the Secretary of the Interior in states without approved programs.

LIMIT OF MODERATE WAVE ACTION (LimWA) - A line shown on FIRMs to indicate the inland limit of the 1 ½ foot (457 mm) breaking wave height during the base flood.

LOCAL ADMINISTRATOR - The person appointed by the community to administer and implement this local law by granting or denying development permits in accordance with its provisions. This person is often the Building Inspector, Code Enforcement Officer, Director of Technical Services, an employee of the engineering department, or any Certified Floodplain Manager (CFM).

LOWEST FLOOR - Lowest floor of the lowest enclosed area (including basement or cellar). An unfinished or flood resistant enclosure, usable solely for parking of vehicles, building access, or storage in an area other than a basement area is not considered a building's lowest floor; provided, that such enclosure is not built so as to render the structure in violation of the applicable non-elevation design requirements of this chapter.

MANUFACTURED HOME - A structure, transportable in one or more sections, which is built on a permanent chassis and designed to be used with or without a permanent foundation when connected to the required utilities. The term does not include a "Recreational vehicle"

MANUFACTURED HOME PARK OR SUBDIVISION - A parcel (or contiguous parcels) of land divided into two or more manufactured home lots for rent or sale.

MEAN SEA LEVEL - For purposes of the National Flood Insurance Program, the National Geodetic Vertical Datum (NGVD) of 1929, the North American Vertical Datum of 1988 (NAVD 88), or other datum to which base flood elevations shown on a community's FIRM are referenced.

MOBILE HOME - Has the same meaning as "manufactured home".

NEW CONSTRUCTION - Structures for which the "start of construction" commenced on or after the effective date of a floodplain management regulation adopted by the community and includes any subsequent improvements to such structure.

NUMBERED STREAMS/WATERBODIES - Any creek, stream, tributary or waterbody identified by a Hydro Unit Code (HUC) from the United States' Geological Survey (USGS), as updated from time-to-time.

ONE HUNDRED YEAR FLOOD or 100 YEAR FLOOD - Has the same meaning as "base flood".

PRIMARY FRONTAL DUNE - A continuous or nearly continuous mound or ridge of sand with relatively steep seaward and landward slopes immediately landward and adjacent to the beach and subject to erosion and overtopping from high tides and waves during major coastal storms. The inland limit of the primary frontal dune occurs at the point where there is a distinct change from a relatively steep slope to a relatively mild slope.

PRINCIPALLY ABOVE GROUND - That at least 51 percent of the actual cash value of the structure, excluding land value, is above ground.

RECREATIONAL VEHICLE - A vehicle which is:

- A. Built on a single chassis;
- B. 400 square feet or less when measured at the largest horizontal projections;
- C. Designed to be self-propelled or permanently towable by a light duty truck; and

- D. Not designed primarily for use as a permanent dwelling but as temporary living quarters for recreational, camping, travel, or seasonal use.

REGULATORY FLOODWAY - The channel of a river or other watercourse and the adjacent land areas that must be reserved in order to discharge the base flood without cumulatively increasing the water surface elevation more than a designated height as determined by the Federal Emergency Management Agency in a Flood Insurance Study or by other agencies as provided in §117-14 B (Use of Other Data) of this chapter.

SAND DUNES – The naturally occurring accumulations of sand in ridges or mounds landward of the beach.

START OF CONSTRUCTION - The first land disturbance activity associated with a development, including: land preparation such as clearing, grading and filling; installation of streets and walkways; excavation for basements, footings, piers or foundations; erection of temporary forms; and installation of accessory buildings such as garages.

For a substantial improvement, the actual “start of construction” means the first alteration of any wall, ceiling, floor, or other structural part of a building, whether or not that alteration affects the external dimensions of the building.

STRUCTURE - A walled and roofed building, including a gas or liquid storage tank, that is principally above ground, as well as a manufactured home.

SUBSTANTIAL DAMAGE – Damage of any origin sustained by a structure whereby the cost of restoring the structure to its before-damaged condition would equal or exceed 50 percent of the market value of the structure before the damage occurred.

SUBSTANTIAL IMPROVEMENT – Any reconstruction, rehabilitation, addition, or other improvement of a structure, the cost of which equals or exceeds 50 percent of the market value of the structure before the start of construction” of the improvement. The term includes structures which have incurred “substantial damage”, regardless of the actual repair work performed. The term does not, however, include either:

- A. Any project for improvement of a structure to correct existing violations of state or local health, sanitary, or safety code specifications which have been identified by the local code enforcement official and which are the minimum necessary to assure safe living conditions; or
- B. Any alteration of a “Historic structure”, provided that the alteration will not preclude the structure’s continued designation as a “Historic structure”.

TOWN – the Town of Greece

VARIANCE - A grant of relief from the requirements of this local law which permits construction or use in a manner that would otherwise be prohibited by this local law.

VIOLATION – The failure of a structure or other development to be fully compliant with the community’s flood plain management regulations.

**ARTICLE III
General Provisions**

§117-5. Lands to which this chapter applies.

This chapter shall apply to all areas of special flood hazard within the jurisdiction of the Town of Greece, Monroe County, State of New York.

§117-6. Basis for establishing areas of special flood hazard.

A. The areas of special flood hazard for the Town of Greece, Community Number 360417 are identified and defined on the following documents prepared by the Federal Emergency Management Agency.

- (1) Flood Insurance Rate Map Panels: 36055C0053H, 36055C0054H, 36055C0061H, 36055C0062H, 36055C0064H, 36055C0066H, 36055C0068H, 36055C0069H, 36055C0088H, 36055C0201H, whose effective date is July 31, 2024, and any subsequent revisions to these map panels that do not affect areas under our community’s jurisdiction.
- (2) A scientific and engineering report entitled “Flood Insurance Study”, Monroe County, New York (All Jurisdictions), dated July 31, 2024.
- (3) Flood Insurance Rate Map Panels: 36055C044G, 36055C0063G, 36055C0157G, 36055C0159G, 36055C0167G, 36055C0176G, 36055C0177G, 36055C0178G, 36055C0179G, 36055C0181G, 36055C0182G, 36055C0184G, 36055C0186G, 36055C0187G, 36055C0191G, whose effective date is August 28, 2008, and any subsequent revisions to these map panels that do not affect areas under our community’s jurisdiction.
- (4) A scientific and engineering report entitled “Flood Insurance Study”, Monroe County, New York (All Jurisdictions), date August 28,2008.
- (5) Town of Greece Flood Zone. The location and boundaries of the Flood Zone established in this chapter shall be shown on a map titled the "Official Town of Greece Flood Zone Map of the Town of Greece, New York" (hereinafter referred to as the "Official Town of Greece Flood Zone Map).

B. The above documents are hereby adopted and declared to be a part of this Local Law. The Flood Insurance Study and/or maps are on file at the Technical Services Department, Building Services Counter, Greece, Town Hall, 1 Vince Tofany Boulevard, Rochester, New York 14616.

§117-7. Interpretation and conflict with other laws.

- A. This Local Law includes all revisions to the National Flood Insurance Program through October 27, 1997 and shall supersede all previous laws adopted for the purpose of flood damage prevention.
- B. In their interpretation and application, the provisions of this local law shall be held to be minimum requirements, adopted for the promotion of the public health, safety, and welfare. Whenever the requirements of this local law are at variance with the requirements of any other lawfully adopted rules, regulations, or ordinances, the most restrictive, or that imposing the higher standards, shall govern.
- C. In instances where a property contains both the Special Flood Hazard Area, as identified on a FEMA Flood Insurance Rate Map and the Official Town of Greece Flood Zone Map, the boundary as identified on the FEMA Flood Insurance Rate Map shall supersede.

§117-8. Severability.

The invalidity of any section or provision of this local law shall not invalidate any other section or provision thereof.

§117-9. Penalties for offenses.

No structure in an area of special flood hazard shall hereafter be constructed, located, extended, converted, or altered and no land shall be excavated or filled without full compliance with the terms of this chapter and any other applicable regulations. Any violation of this chapter or of any order, requirement, decision or determination issued by the Building Inspector pursuant to this chapter is hereby declared to be an offense, punishable by a fine not exceeding \$1,000 or imprisonment for a period not to exceed six months, or both, upon conviction for a first offense; upon conviction for a second offense, both of which offenses were committed within a period of five years, punishable by a fine not less than \$1,000 nor more than \$5,000 or imprisonment for a period not to exceed six months, or both; and upon conviction for a third or subsequent offense, all of which offenses were committed within a period of five years, punishable by a fine not less than \$2,500 nor more than \$10,000 or imprisonment for a period not to exceed six months, or both. However, for the purpose of conferring jurisdiction upon courts and judicial officers generally, violations of this chapter or of any order, requirement, decision, or determination issued by the Building Inspector pursuant to this chapter shall be deemed misdemeanors, and for such purpose only all provisions of law relating to misdemeanors shall apply to such violations. Each week's continued violation shall constitute a separate additional violation. Any structure found not compliant with the requirements of this chapter for which the developer and/or owner has not applied for and received an approved variance pursuant to Article VI (Variance Procedure) will be declared non-compliant and notification sent to the Federal Emergency Management Agency.

§117-10. Warning and disclaimer of liability.

The degree of flood protection required by this local law is considered reasonable for regulatory purposes and is based on scientific and engineering considerations. Larger floods can and will occur on rare occasions. Flood heights may be increased by man-made or natural causes. This local law does not imply that land outside the area of special flood hazards or uses permitted within such areas will be free from flooding or flood damages. This local law shall not create

liability on the part of the Town of Greece, any officer or employee thereof, or the Federal Emergency Management Agency, for any flood damages that result from reliance on this local law or any administrative decision lawfully made there under.

ARTICLE IV ADMINISTRATION

§117-11. Designation of Local Administrator

The Building Inspector is hereby appointed Local Administrator to administer and implement this chapter by granting or denying floodplain development permits in accordance with its provisions.

§117-12. Floodplain development permit.

- A. Purpose. A floodplain development permit is hereby established for all construction and other development to be undertaken in areas of special flood hazard in this community for the purpose of protecting its citizens from increased flood hazards and insuring that new development is constructed in a manner that minimizes its exposure to flooding. It shall be unlawful to undertake any development in an area of special flood hazard, as shown on the Flood Insurance Rate Map enumerated in §117-6 (Basis for Establishing Areas of Special Flood Hazard), without a valid floodplain development permit. Application for a permit shall be made on forms furnished by the Local Administrator and may include, but not be limited to: plans, in duplicate, drawn to scale and showing: the nature, location, dimensions, and elevations of the area in question; existing or proposed structures, fill, storage of materials, drainage facilities, and the location of the foregoing.
- B. Fees. All applications for a floodplain development permit shall be accompanied by an application fee to be established from time to time by the Town Board. In addition, the applicant shall be responsible for reimbursing the Town of Greece for any additional costs necessary for review, inspection and approval of this project. The Local Administrator may require a deposit of no more than \$500.00 to cover these additional costs.

§117-13. Application for permit.

The applicant shall provide the following information as appropriate. Additional information may be required on the permit application form.

- A. The proposed elevation, in relation to mean sea level, of the top of the lowest floor (including basement or cellar) of any new or substantially improved structure to be located in a Special Flood Hazard Area (SFHA). Upon completion of the lowest floor, the permittee shall submit to the Local Administrator the as-built elevation, certified by a licensed professional engineer or surveyor.
- B. The proposed elevation, in relation to mean sea level, of the bottom of the lowest structural member of the lowest floor (excluding pilings and columns) of any new or substantially improved structure to be located in Zones V1-V30, VE, Coastal A, or Zone V if base flood elevation data are available. Upon completion of the lowest floor, the permittee shall submit

to the Local Administrator the as-built elevation, certified by a licensed professional engineer or surveyor.

- C. The proposed elevation, in relation to mean sea level, to which any new or substantially improved non-residential structure will be floodproofed. Upon completion of the floodproofed portion of the structure, the permittee shall submit to the Local Administrator the as-built floodproofed elevation, certified by a professional engineer or surveyor.
- D. A certificate from a licensed professional engineer or architect that any utility floodproofing will meet the criteria in §117-16 C (Utilities),
- E. A certificate from a licensed professional engineer or architect that any non-residential floodproofed structure will meet the floodproofing criteria in §117-19 (Non-residential structures, except coastal high hazard areas and coastal A zones).
- F. A description of the extent to which any watercourse will be altered or relocated as a result of proposed development. Computations by a licensed professional engineer must be submitted that demonstrate that the altered or relocated segment will provide equal or greater conveyance than the original stream segment. The applicant must submit any maps, computations or other material required by the Federal Emergency Management Agency (FEMA) to revise the documents enumerated in §117-6 (Basis for establishing areas of special flood hazard), when notified by the Local Administrator, and must pay any fees or other costs assessed by FEMA for this purpose. The applicant must also provide assurances that the conveyance capacity of the altered or relocated stream segment will be maintained.
- G. A technical analysis, by a licensed professional engineer, if required by the Local Administrator, which shows whether proposed development to be located in an area of special flood hazard may result in physical damage to any other property.
- H. In Zone A, when no base flood elevation data are available from other sources, base flood elevation data shall be provided by the permit applicant for subdivision proposals and other proposed developments (including proposals for manufactured home and recreational vehicle parks and subdivisions) that are greater than either 50 lots or 5 acres.
- I. In Zones V1-V30, VE, V, and Coastal A if base flood elevations are available, designs and specifications, certified by a licensed professional engineer or architect, for any breakaway walls in a proposed structure with design strengths in excess of 20 pounds per square foot.
- J. In Zones V1-V30, VE, V, and Coastal A if base flood elevations are available, for all new and substantial improvements to structures, floodplain development permit applications shall be accompanied by design plans and specifications, prepared in sufficient detail to enable independent review of the foundation support and connection components. Said plans and specifications shall be developed or reviewed by a licensed professional engineer or architect, and shall be accompanied by a statement, bearing the signature of the architect or engineer, certifying that the design and methods of construction to be used are in accordance with accepted standards of practice and with all applicable provisions of this local law.

§117-14. Duties and responsibilities of Local Administrator.

Duties of the Local Administrator shall include, but not be limited to the following.

A. Permit application review. The Local Administrator shall conduct the following permit application review before issuing a floodplain development permit:

- (1) Review all applications for completeness, particularly with the requirements of §117-13 (Application for permit), Application for permit, and for compliance with the provisions and standards of this law.
- (2) Review subdivision and other proposed new development, including manufactured home parks to determine whether proposed building sites will be reasonably safe from flooding. If a proposed building site is located in an area of special flood hazard, all new construction and substantial improvements shall meet the applicable standards of Article V (Construction standards), and, in particular, § 117-15 B (Subdivision proposals).
- (3) Determine whether any proposed development in an area of special flood hazard may result in physical damage to any other property (e.g., stream bank erosion and increased flood velocities). The Local Administrator may require the applicant to submit additional technical analyses and data necessary to complete the determination.
- (4) If the proposed development may result in physical damage to any other property or fails to meet the requirements of Article V (Construction Standards), no permit shall be issued. The applicant may revise the application to include measures that mitigate or eliminate the adverse effects and re-submit the application.
- (5) Determine that all necessary permits have been received from those governmental agencies from which approval is required by State or Federal law.

B. Use of other data.

- (1) When the Federal Emergency Management Agency has designated areas of special flood hazard on the community's Flood Insurance Rate map (FIRM) but has neither produced water surface elevation data (these areas are designated Zone A or V on the FIRM) nor identified a floodway, the Local Administrator shall obtain, review and reasonably utilize any base flood elevation and floodway data available from a Federal, State or other source, including data developed pursuant to § 117-13 B (H) as criteria for requiring that new construction, substantial improvements or other proposed development meet the requirements of this law.
- (2) When an area of special flood hazard, base flood elevations, and/or floodway data are available from a federal, state or other authoritative source, but differ from the data in the documents enumerated in §117-6 (Basis for establishing areas of special flood hazard), the Local Administrator may reasonably utilize the other flood information to enforce more restrictive development standards.
- (3) All streams and water bodies have potential floodplains during periods of extreme runoff. FEMA has mapped some of the Town's water bodies, but others remained unmapped by FEMA. In addition to those water bodies mapped by FEMA, the following data shall be utilized.
 - i. The Town of Greece Flood Zone pursuant to §117-6 A (5), which boundaries are based off the following report/studies:

1. "Floodplain Information, Flood Hazard Report for Greece, New York", prepared by the U.S. Army Engineer District, Buffalo for Town of Greece, New York, July 1975.
 2. "Special Flood Hazard Evaluation Report, Buttonwood Creek and West Branch Round Pond Creek, Town of Greece, Monroe County, New York", prepared by the U.S. Army Corp of Engineers, Buffalo District, March 1993.
- (4) Unstudied stream segments and tributaries are also assumed to have unidentified floodplain limits requiring analysis of definition of the actual floodplain limits. Included are numbered streams/waterbodies, as defined in §117-4.
 - (5) When base flood elevation data are not available, the Local Administrator may use flood information from any other authoritative source, such as historical data, to establish flood elevations within the areas of special flood hazard, for the purposes of this chapter.
 - (6) Floodplain analysis for stream segments without regulatory (FEMA) floodways shall develop floodways by use of encroachment analysis.

C. Alteration of water courses.

- (1) Notification to adjacent municipalities that may be affected and the New York State Department of Environmental Conservation prior to permitting any alteration or relocation of a watercourse and submit evidence of such notification to the Regional Administrator, Region II, Federal Emergency Management Agency.
- (2) Determine that the permit holder has provided for maintenance within the altered or relocated portion of said watercourse so that the flood carrying capacity is not diminished.

D. Construction stage.

- (1) In Zones A1-A30, AE, AH, and Zone A if base flood elevation data are available, upon placement of the lowest floor or completion of floodproofing of a new or substantially improved structure, obtain from the permit holder a certification of the as-built elevation of the lowest floor or floodproofed elevation, in relation to mean sea level. The certificate shall be prepared by or under the direct supervision of a licensed land surveyor or professional engineer and certified by same. For manufactured homes, the permit holder shall submit the certificate of elevation upon placement of the structure on the site. A certificate of elevation must also be submitted for a recreational vehicle if it remains on a site for 180 consecutive days or longer (unless it is fully licensed and ready for highway use).
- (2) In Zones V1-V30, VE, V, and Coastal A if base flood elevation data are available, upon placement of the lowest floor of a new or substantially improved structure, the permit holder shall submit to the Local Administrator a certificate of elevation, in relation to mean sea level, of the bottom of the lowest structural member of the lowest floor (excluding pilings and columns). The certificate shall be prepared by or under the direct supervision of a licensed land surveyor or professional engineer and certified by same. For manufactured homes, the permit

holder shall submit the certificate of elevation upon placement of the structure on the site. An elevation certificate must also be submitted for a recreational vehicle if it remains on a site 180 consecutive days or longer (unless it is fully licensed and ready for highway use).

- (3) Any further work undertaken prior to submission and approval of the certification shall be at the permit holder's risk. The Local Administrator shall review all data submitted. Deficiencies detected shall be cause to issue a stop work order for the project unless immediately corrected.

E. Inspections. The Local Administrator and/or the developer's engineer or architect shall make periodic inspections at appropriate times throughout the period of construction in order to monitor compliance with permit conditions and enable said inspector to certify, if requested, that the development is in compliance with the requirements of the floodplain development permit and/or any variance provisions.

F. Stop-work orders.

- (1) The Local Administrator shall issue, or cause to be issued, a stop work order for any floodplain development found ongoing without a development permit. Disregard of a stop work order shall subject the violator to the penalties described in §117-9 (Penalties for offenses) of this chapter.
- (2) The Local Administrator shall issue, or cause to be issued, a stop work order for any floodplain development found non-compliant with the provisions of this law and/or the conditions of the development permit. Disregard of a stop work order shall subject the violator to the penalties described in §117-9 (Penalties for offenses) of this chapter.

G. Certificate of compliance

- (1) In areas of special flood hazard, as determined by documents enumerated in §117-6 (Basis for establishing areas of special flood hazard), it shall be unlawful to occupy or to permit the use or occupancy of any building or premises, or both, or part thereof hereafter created, erected, changed, converted or wholly or partly altered or enlarged in its use or structure until a certificate of compliance has been issued by the Local Administrator stating that the building or land conforms to the requirements of this local law.
- (2) A certificate of compliance shall be issued by the Local Administrator upon satisfactory completion of all development in areas of special flood hazard.
- (3) Issuance of the certificate shall be based upon the inspections conducted as prescribed in §117-14 E (Inspections), and/or any certified elevations, hydraulic data, floodproofing, anchoring requirements or encroachment analyses which may have been required as a condition of the approved permit.

H. Information to be retained. The Local Administrator shall retain and make available for inspection, copies of the following:

- (1) Floodplain development permits and certificates of compliance;
- (2) Certifications of as-built lowest floor elevations of structures required pursuant to §117-14 D (1) and §117-14 D (2), and whether the structures contain a basement;

- (3) Floodproofing certificates required pursuant to sub-section 4.4-4(1), and whether the structures contain a basement;
- (4) Variances issued pursuant to Article VI (Variance Procedure); and,
- (5) Notices required under §117-14 C (Alterations of water courses)
- (6) Base flood elevations developed pursuant to §117-13 G and supporting technical analysis.

ARTICLE V
Construction Standards

§117-15. General standards.

The following standards apply to new development, including new and substantially improved structures, in the areas of special flood hazard shown on the Flood Insurance Rate Map designated in §117-6 (Basis for establishing areas of special flood hazard areas).

- A. Coastal high hazard areas and coastal A zones. The following requirements apply within V1-VE30, VE, V and Coastal A Zones:
 - (1) All new construction, including manufactured homes and recreational vehicles on site 180 days or longer and not fully licensed for highway use, shall be located landward of the reach of high tide
 - (2) The use of fill for structural support of buildings, manufactured homes or recreational vehicles on site 180 days or longer is prohibited.
 - (3) Man-made alteration of sand dunes which would increase potential flood damage is prohibited.
- B. Subdivision proposals. The following standards apply to all new subdivision proposals and other proposed development in areas of special flood hazard (including proposals for manufactured home and recreational vehicle parks and subdivisions):
 - (1) Proposals shall be consistent with the need to minimize flood damage;
 - (2) Public utilities and facilities such as sewer, gas, electrical and water systems shall be located and constructed to minimize flood damage; and,
 - (3) Adequate drainage shall be provided to reduce exposure to flood damage.
 - (4) Proposed development shall not result in a physical damage to any other property (e.g., stream bank erosion or increased flood velocities). If requested by the Local Administrator, the applicant shall provide a technical analysis, by a licensed professional engineer, demonstrating that this condition has been met.
 - (5) Proposed development shall be designed, located, and constructed so as to offer the minimum resistance to the flow of water and shall be designed to have a minimum effect upon the height of flood water.
 - (6) Any equipment or materials located in a special flood hazard area shall be elevated, anchored, and floodproofed as necessary to prevent flotation, flood damage, and the release of hazardous substances.
 - (7) No alteration or relocation of a watercourse shall be permitted unless:

- a) A technical evaluation by a licensed professional engineer demonstrates that the altered or relocated segment will provide conveyance equal to or greater than that of the original stream segment and will not result in physical damage to any other property;
- b) If warranted, a conditional revision of the Flood Insurance Rate Map is obtained from the Federal Emergency Management Agency, with the applicant providing the necessary data, analyses, and mapping and reimbursing the Town of Greece for all fees and other costs in relation to the application; and
- c) The applicant provides assurance that maintenance will be provided so that the flood carrying capacity of the altered or relocated portion of the watercourse will not be diminished.

C. Encroachments.

- (1) Within Zones A1-A30 and AE, on streams without a regulatory floodway, no new construction, substantial improvements or other development (including fill) shall be permitted unless:
 - a) The applicant demonstrates that the cumulative effect of the proposed development, when combined with all other existing and anticipated development, will not increase the water surface elevation of the base flood more than one foot at any location, or,
 - b) The Town of Greece agrees to apply to the Federal Emergency Management Agency (FEMA) for a conditional FIRM revision, FEMA approval is received and the applicant provides all necessary data, analyses and mapping and reimburses the Town of Greece for all fees and other costs in relation to the application. The applicant must also provide all data, analyses and mapping and reimburse the Town of Greece for all costs related to the final map revision.
- (2) On streams with a regulatory floodway, as shown on the Flood Boundary and Floodway Map or the Flood Insurance Rate Map adopted in §117-6 (Basis for establishing areas of special flood hazard), no new construction, substantial improvements or other development in the floodway (including fill) shall be permitted unless:
 - a) A technical evaluation by a licensed professional engineer demonstrates through hydrologic and hydraulic analyses performed in accordance with standard engineering practice that such an encroachment shall not result in any increase in flood levels during occurrence of the base flood, or,
 - b) The Town of Greece agrees to apply to the Federal Emergency Management Agency (FEMA) for a conditional FIRM and floodway revision, FEMA approval is received and the applicant provides all necessary data, analyses and mapping and reimburses the Town of Greece for all fees and other costs in relation to the application. The applicant must also provide all data, analyses and mapping and reimburse the Town of Greece for all costs related to the final map revisions.

- c) In a Special Flood Hazard Area (SFHA), if any development is found to increase or decrease base flood elevations, the Town of Greece shall as soon as practicable, but not later than six months after the date such information becomes available, notify FEMA and the New York State Department of Environmental Conservation of the changes by submitting technical or scientific data in accordance with standard engineering practice.
- d) Whenever any portion of a floodplain is authorized for development, except in Lake Ontario AE, AO, and VE zones, the volume of space occupied by the authorized fill or structure below the base flood elevation be compensated for and balanced by a hydraulically equivalent volume of excavation taken from below the base flood elevation at or adjacent to the development site. In the instance where compensation is not feasible on a property due to physical constraints, compensation shall be provided within the flooding source's watershed, subject to the review and approval of the Commissioner of Public Works. All such excavations shall be constructed to drain freely to the watercourse. No area below the waterline of a pond or other body of water can be credited as a compensating excavation.

§117-16. Standards for all structures.

The following standards apply to new development, including new and substantially improved structures, in the areas of special flood hazard shown on the Flood Insurance Rate Map designated in §117-6 (Basis for establishing areas of special flood hazard).

- A. Anchoring. New structures and substantial improvement to structures in areas of special flood hazard shall be anchored to prevent flotation, collapse, or lateral movement during the base flood. This requirement is in addition to applicable State and local anchoring requirements for resisting wind forces.
- B. Construction materials and methods.
 - (1) New construction and substantial improvements to structures shall be constructed with materials and utility equipment resistant to flood damage.
 - (2) New construction and substantial improvements to structures shall be constructed using methods and practices that minimize flood damage.
 - (3) For enclosed areas below the lowest floor of a structure within Zones A1-A30, AE, AO or A, new and substantially improved structures shall have fully enclosed areas below the lowest floor that are useable solely for parking of vehicles, building access or storage in an area other than a basement and which are subject to flooding, designed to automatically equalize hydrostatic flood forces on exterior walls by allowing for the entry and exit of flood waters. Designs for meeting this requirement must either be certified by a licensed professional engineer or architect or meet or exceed the following minimum criteria:
 - a) A minimum of two openings of each enclosed area having a total net area of not less than one square inch for every square foot of enclosed area subject to flooding; and
 - b) The bottom of all such openings no higher than one foot above grade.

- c) Openings not less than three inches in any direction.
- (4) Openings may be equipped with louvers, valves, screens or other coverings or devices provided they permit the automatic entry and exit of floodwaters. Enclosed areas sub-grade on all sides are considered basements and are not permitted.
- (5) Within Zones V1-V30, VE, V, and Coastal A if base flood elevation are available, new construction and substantial improvements shall have the space below the lowest floor either free from obstruction or constructed with non-supporting breakaway walls, open wood lattice-work or insect screening intended to collapse under wind and water loads without causing collapse, displacement, or other structural damage to the elevated portion of the building or supporting foundation system. The enclosed space below the lowest floor shall be used only for parking vehicles, building access or storage. Use of this space for human habitation is expressly prohibited. The construction of stairs, stairwells and elevator shafts are subject to the design requirements for breakaway walls.

C. Utilities.

- (1) New and replacement electrical equipment, heating, ventilating, air conditioning, plumbing connections, and other service equipment shall be located at least two feet above the base flood elevation, or be designed to prevent water from entering and accumulating within the components during a flood and to resist hydrostatic and hydrodynamic loads and stresses. Electrical wiring and outlets, switches, junction boxes and panels shall be elevated or designed to prevent water from entering and accumulating within the components unless they conform to the appropriate provisions of the electrical part of the Building Code of New York State or the Residential Code of New York State for location of such items in wet locations;
- (2) New and replacement water supply systems shall be designed to minimize or eliminate infiltration of flood waters into the system;
- (3) New and replacement sanitary sewage systems shall be designed to minimize or eliminate infiltration of flood waters. Sanitary sewer and storm drainage systems for buildings that have openings below the base flood elevation shall be provided with automatic backflow valves or other automatic backflow devices that are installed in each discharge line passing through a building's exterior wall; and,
- (4) On-site waste disposal systems shall be located to avoid impairment to them or contamination from them during flooding.

D. Storage tanks.

- (1) Underground tanks shall be anchored to prevent flotation, collapse and lateral movement during conditions of the base flood.
- (2) Above-ground tanks shall be:
 - a) Anchored to prevent flotation, collapse or lateral movement during conditions of the base flood or;

- b) Installed at or above the base flood elevation as shown on the Flood Insurance Rate Map enumerated §117-6 (Basis for establishing areas of special flood hazard), plus two feet.

§117-17. Residential structures (except Coastal High Hazard Areas and Coastal A Zones).

- A. Elevation. The following standards apply to new and substantially improved residential structures located in areas of special flood hazard, in addition to the requirements in §117-15 B (Subdivision proposals), and §117-15 C (Encroachments), and §117-16 (Standards for all structures).
 - (1) Within Zones A1-A30, AE, AH if base flood elevation data are available, new construction and substantial improvements shall have the top of the lowest floor (including basement) elevated to or above two feet above the base flood elevation. Within Zones AH adequate drainage paths are required to guide flood waters around and away from proposed structures on slopes.
 - (2) Within Zone A, when no base flood elevation data are available, a base flood elevation shall be determined by either:
 - a) Obtain and reasonably use data available from a federal, state, or other source plus two feet of freeboard, or,
 - b) Determine the base flood elevation in accordance with accepted hydrologic and hydraulic engineering practice, plus two feet of freeboard. Determinations shall be undertaken by a registered design professional who shall document that the technical methods used reflect currently accepted engineering practice. Studies, analyses, and computations shall be submitted in sufficient detail to allow thorough review and approval.
 - (3) Within Zone AO, new construction and substantial improvements shall have the lowest floor (including basement) elevated above the highest adjacent grade at least as high as the depth number specified in feet on the community's Flood Insurance Rate Map enumerated in §117-6 (Basis for establishing the areas of special flood hazard) plus one foot of freeboard. In areas designated as Zone AO where a depth number is not specified on the map, the depth number shall be taken as being equal to 2 feet. Within AO, adequate drainage paths are required to guide flood waters around and away from proposed structures on slopes.

§117-18. Residential structures (Coastal High Hazard Areas and Coastal A Zones)

The following standards, in addition to the standards in §117-15 A (Coastal high hazard areas and coastal A zones), §117-15 B (Subdivision proposals), and §117-16 (Standards for all structures), apply to new and substantially improved residential structures located in areas of special flood hazard shown as Zones V1-V30, VE, V, or Coastal A on the community's Flood Insurance Rate Map designated in §117-6 (Basis for establishing areas of special flood hazard).

- A. Elevation. New construction and substantial improvements shall be elevated on pilings, columns or shear walls such that the bottom of the lowest horizontal structural member supporting the lowest elevated floor (excluding columns, piles, diagonal bracing attached to the piles or columns, grade beams, pile caps and other members designed to either withstand

storm action or break away without imparting damaging loads to the structure) is elevated to or above two feet above base flood elevation so as not to impede the flow of water.

B. Determination of loading forces. Structural design shall consider the effects of wind and water loads acting simultaneously during the base flood on all building components.

- (1) The structural design shall be adequate to resist water forces that would occur during the base flood. Horizontal water loads considered shall include inertial and drag forces of waves, current drag forces, and impact forces from waterborne storm debris. Dynamic uplift loads shall also be considered if bulkheads, walls, or other natural or man-made flow obstructions could cause wave runup beyond the elevation of the base flood.
- (2) Buildings shall be designed and constructed to resist the forces due to wind pressure. Wind forces on the superstructure include windward and leeward forces on vertical walls, uplift on the roof, internal forces when openings allow wind to enter the house, and upward force on the underside of the house when it is exposed. In the design, the wind should be assumed to blow potentially from any lateral direction relative to the house.
- (3) Wind loading values used shall be those required by the building code.

C. Foundation standards.

- (1) The pilings or column foundation and structure attached thereto shall be adequately anchored to resist flotation, collapse or lateral movement due to the effects of wind and water pressures acting simultaneously on all building components. Foundations must be designed to transfer safely to the underlying soil all loads due to wind, water, dead load, live load and other loads (including uplift due to wind and water).
- (2) Spread footings and fill material shall not be used for structural support of a new building or substantial improvement of an existing structure.

D. Pile foundation design.

- (1) The design ratio of pile spacing to pile diameter shall not be less than 8:1 for individual piles (this shall not apply to pile clusters located below the design grade). The maximum center-to-center spacing of wood piles shall not be more than 12 feet on center under load bearing sills, beams, or girders.
- (2) Pilings shall have adequate soil penetration (bearing capacity) to resist the combined wave and wind loads (lateral and uplift) associated with the base flood acting simultaneously with typical structure (live and dead) loads, and shall include consideration of decreased resistance capacity caused by erosion of soil strata surrounding the piles. The minimum penetration for foundation piles is to an elevation of 5 feet below mean sea level (msl) datum if the BFE is +10 msl or less, or to be at least 10 feet below msl if the BFE is greater than +10 msl.
- (3) Pile foundation analysis shall also include consideration of piles in column action from the bottom of the structure to the stable soil elevation of the site. Pilings may be horizontally or diagonally braced to withstand wind and water forces.
- (4) The minimum acceptable sizes for timber piles are a tip diameter of 8 inches for

round timber piles and 8 by 8 inches for square timber piles. All wood piles must be treated in accordance with requirements of EPEE-C3 to minimize decay and damage from fungus.

- (5) Reinforced concrete piles shall be cast of concrete having a 28-day ultimate compressive strength of not less than 5,000 pounds per square inch, and shall be reinforced with a minimum of four longitudinal steel bars having a combined area of not less than 1% nor more than 4% of the gross concrete area. Reinforcing for precast piles shall have a concrete cover of not less than 1 1/4 inches for No. 5 bars and smaller and not less than 1 1/2 inches for No. 6 through No. 11 bars. Reinforcement for piles cast in the field shall have a concrete cover of not less than 2 inches.
- (6) Piles shall be driven by means of a pile driver or drop hammer, jetted, or augured into place.
- (7) Additional support for piles in the form of bracing may include lateral or diagonal bracing between piles.
- (8) When necessary, piles shall be braced at the ground line in both directions by a wood timber grade beam or a reinforced concrete grade beam. These at-grade supports should be securely attached to the piles to provide support even if scoured from beneath.
- (9) Diagonal bracing between piles, consisting of 2-inch by 8-inch (minimum) members bolted to the piles, shall be limited in location to below the lowest supporting structural member and above the stable soil elevation, and aligned in the vertical plane along pile rows perpendicular to the shoreline. Galvanized steel rods (minimum diameter 1/2 inch) or cable type bracing is permitted in any plane.
- (10) Diagonal bracing between piles, consisting of 2-inch by 8-inch (minimum) members bolted to the piles, shall be limited in location to below the lowest supporting structural member and above the stable soil elevation, and aligned in the vertical plane along pile rows perpendicular to the shoreline. Galvanized steel rods (minimum diameter 1/2 inch) or cable type bracing is permitted in any plane.
- (11) Knee braces, which stiffen both the upper portion of a pile and the beam-to-pile connection, may be used along pile rows perpendicular and parallel to the shoreline. Knee braces shall be 2-by-8 lumber bolted to the sides of the pile/beam, or 4-by-4 or larger braces framed into the pile/beam. Bolting shall consist of two 5/8-inch galvanized steel bolts (each end) for 2-by-8 members, or one 5/8-inch lag bolt (each end) for square members. Knee braces shall not extend more than 3 feet below the elevation of the base flood.

E. Column foundation design.

- (1) Masonry piers or poured-in-place concrete piers shall be internally reinforced to resist vertical and lateral loads, and be connected with a movement-resisting connection to a pile cap or pile shaft.

F. Connectors and fasteners.

- (1) Galvanized metal connectors, wood connectors, or bolts of size and number

adequate for the calculated loads must be used to connect adjoining components of a structure. Toe nailing as a principal method of connection is not permitted. All metal connectors and fasteners used in exposed locations shall be steel, hot-dipped galvanized after fabrication. Connectors in protected interior locations shall be fabricated from galvanized sheet.

G. Beam to pile connections.

- (1) The primary floor beams or girders shall span the supports in the direction parallel to the flow of potential floodwater and wave action and shall be fastened to the columns or pilings by bolting, with or without cover plates. Concrete members shall be connected by reinforcement, if cast in place, or (of precast) shall be securely connected by bolting and welding. If sills, beams, or girders are attached to wood piling at a notch, a minimum of two (5/8)-inch galvanized steel bolts or two hot-dipped galvanized straps 3/16 inch by 4 inches by 18 inches each bolted with two 1/2 inch lag bolts per beam member shall be used. Notching of pile tops shall be the minimum sufficient to provide ledge support for beam members without unduly weakening pile connections. Piling shall not be notched so that the cross section is reduced below 50%.

H. Floor and deck connections.

- (1) Wood 2- by 4-inch (minimum) connectors or metal joist anchors shall be used to tie floor joists to floor beams/girders. These should be installed on alternate floor joists, at a minimum. Cross bridging of all floor joists shall be provided. Such cross bridging may be 1- by 3-inch members, placed 8 feet on-center maximum, or solid bridging of same depth as joist at same spacing.
- (2) Plywood should be used for subflooring and attic flooring to provide good torsional resistance in the horizontal plane of the structure. The plywood should not be less than (3/4)-inch total thickness, and should be exterior grade and fastened to beams or joists with 8d annular or spiral thread galvanized nails. Such fastening shall be supplemented by the application of waterproof industrial adhesive applied to all bearing surfaces

I. Exterior wall connections.

- (1) All bottom plates shall have any required breaks under a wall stud or an anchor bolt. Approved anchors will be used to secure rafters or joists and top and bottom plates to studs in exterior and bearing walls to form a continuous tie. Continuous 15/32-inch or thicker plywood sheathing--overlapping the top wall plate and continuing down to the sill, beam, or girder--may be used to provide the continuous tie. If the sheets of plywood are not vertically continuous, then 2-by-4 nailer blocking shall be provided at all horizontal joints. In lieu of the plywood, galvanized steel rods of 1/2-inch diameter or galvanized steel straps not less than 1 inch wide by 1/16 inch thick may be used to connect from the top wall plate to the sill, beam, or girder. Washers with a minimum diameter of 3 inches shall be used at each end of the 1/2-inch round rods. These anchors shall be installed no more than 2 feet from each corner rod, no more than 4 feet on center.

J. Ceiling joist/rafter connections.

- (1) All ceiling joists or rafters shall be installed in such a manner that the joists provide a continuous tie across the rafters. Ceiling joists and rafters shall be securely fastened at their intersections. A metal or wood connector shall be used at alternate ceiling joist/rafter connections to the wall top plate.
- (2) Gable roofs shall be additionally stabilized by installing 2-by-4 blocking on 2-foot centers between the rafters at each gable end. Blocking shall be installed a minimum of 8 feet toward the house interior from each gable end.

K. Projecting members.

- (1) All cantilevers and other projecting members must be adequately supported and braced to withstand wind and water uplift forces. Roof eave overhangs shall be limited to a maximum of 2 feet and joist overhangs to a maximum of 1 foot. Larger overhangs and porches will be permitted if designed or reviewed and certified by a registered professional engineer or architect.

L. Roof sheathing.

- (1) Plywood, or other wood material, when used as roof sheathing, shall not be less than 15/32 inch in thickness, and shall be of exterior sheathing grade or equivalent. All attaching devices for sheathing and roof coverings shall be galvanized or be of other suitable corrosion resistant material.
- (2) All corners, gable ends, and roof overhangs exceeding six inches shall be reinforced by the application of waterproof industrial adhesive applied to all bearing surfaces of any plywood sheet used in the sheathing of such corner, gable end, or roof overhang.
- (3) In addition, roofs should be sloped as steeply as practicable to reduce uplift pressures, and special care should be used in securing ridges, hips, valleys, eaves, vents, chimneys, and other points of discontinuity in the roofing surface.

M. Protection of openings.

- (1) All exterior glass panels, windows, and doors shall be designed, detailed, and constructed to withstand loads due to the design wind speed of 75 mph. Connections for these elements must be designed to transfer safely the design loads to the supporting structure. Panel widths of multiple panel sliding glass doors shall not exceed three feet.

N. Breakaway wall design standards.

- (1) The breakaway wall shall have a design safe loading resistance of not less than 10 and not more than 20 pounds per square foot, with the criterion that the safety of the overall structure at the point of wall failure be confirmed using established procedures. Grade beams shall be installed in both directions for all piles considered to carry the breakaway wall load. Knee braces are required for front row piles that support breakaway walls.
- (2) Use of breakaway wall strengths in excess of 20 pounds per square foot shall not be permitted unless a registered professional engineer or architect has developed or reviewed the structural design and specifications for the building foundation and breakaway wall components, and certifies that:

- a) The breakaway walls will fail under water loads less than those that would occur during the base flood; and
- b) The elevated portion of the building and supporting foundation system will not be subject to collapse, displacement, or other structural damage due to the effects of wind and water loads acting simultaneously on all building components (structural and non-structural). Water loading values used shall be those associated with the base flood. Wind loading values shall be those required by the building code.

§117-19. Non-residential structures (except Coastal High Hazard Areas and Coastal A Zones).

The following standards apply to new and substantially improved commercial, industrial and other non-residential structures located in areas of special flood hazard, in addition to the requirements in §117-15 B (Subdivision proposals), §117-15 C (Encroachments), and §117-16 (Standards for all structures).

- A. Within Zones A1-A30, AE and AH, and also Zone A if base flood elevation data are available, new construction and substantial improvements of any non-residential structure, together with attendant utility and sanitary facilities, shall either:
 - (1) Have the lowest floor, including basement or cellar, elevated to or above two feet above the base flood elevation; or
 - (2) Be floodproofed so that the structure is watertight below two feet above the base flood elevation, including attendant utility and sanitary facilities, with walls substantially impermeable to the passage of water. All structural components located below the base flood elevation must be capable of resisting hydrostatic and hydrodynamic loads and the effects of buoyancy.
- B. Within Zone AO, new construction and substantial improvements of non-residential structures shall:
 - (1) Have the lowest floor (including basement) elevated above the highest adjacent grade at least as high as the depth number specified in feet on the community's FIRM plus two feet (at least three feet if no depth number is specified), or
 - (2) Together with attendant utility and sanitary facilities, be completely floodproofed to that level to meet the floodproofing standard specified in §117-19 A (2).
- C. If the structure is to be floodproofed, a licensed professional engineer or architect shall develop and/or review structural design, specifications, and plans for construction. A Floodproofing Certificate or other certification shall be provided to the Local Administrator that certifies the design and methods of construction are in accordance with accepted standards of practice for meeting the provisions of §117-19 A (2), including the specific elevation (in relation to mean sea level) to which the structure is to be floodproofed.
- D. Within Zones AH and AO, adequate drainage paths are required to guide flood waters around and away from proposed structures on slopes.
- E. Within Zone A, when no base flood elevation data are available, the lowest floor (including basement) shall be elevated at least three feet above the highest adjacent grade.

§117-20. Non-residential structures (Coastal High Hazard Areas and Coastal A Zones).

- A. In Zones V1-V30, VE, V, and Coastal A if base flood elevations are available, new construction and substantial improvements of any non-residential structure, together with attendant utility and sanitary facilities, shall have the bottom of lowest member of the lowest floor elevated to or above two feet above the base flood elevation. Floodproofing of structures is not an allowable alternative to elevating the lowest floor to two feet above the base flood elevation in Zones V1-V30, VE, V, and Coastal A.

§117-21. Manufactured homes and recreational vehicles.

The following standards in addition to the standards in §117-15 (General standards) and §117-16 (Standards for all structures) apply, as indicated, in areas of special flood hazard to manufactured homes and to recreational vehicles which are located in areas of special flood hazard.

A. Recreational vehicles.

- (1) Recreational vehicles placed on sites within Zones A, A1-A30, AE, AH, AO, V1-V30, V, and VE shall either:

- a) Be on site fewer than 180 consecutive days,
- b) Be fully licensed and ready for highway use, or
- c) Meet the requirements for manufactured homes in §117-21 (B), (C), and (D).

- (2) A recreational vehicle is ready for highway use if it is on its wheels or jacking system, is attached to the site only by quick disconnect type utilities and security devices and has no permanently attached additions.

- B. Within Zones A1-A30, AE, AH, the bottom of the frame of the manufactured home shall be elevated to meet the requirements of §117-17 A (1). Elevation on piers consisting of dry stacked blocks is prohibited.
- C. Within Zone A, the bottom of the frame of the manufactured home shall be elevated to meet the requirements of §117-17 A (2). Elevation on piers consisting of dry stacked blocks is prohibited.
- D. Within Zone AO, the bottom of the frame of the manufactured home shall be elevated to meet the requirements of § 117-17 A (3). Elevation on piers consisting of dry stacked blocks is prohibited.
- E. Within V or VE, manufactured homes must meet the requirements of § 117-18 (Residential structures – Coastal High Hazard Areas and Coastal A Zones).
- F. The foundation and anchorage of manufactured homes to be located in identified floodways shall be designed and constructed in accordance with ASCE 24.

§117-22. Accessory structures, including detached garages.

The following standards apply to new and substantially improved accessory structures, including detached garages, in the areas of special flood hazard shown on the Flood Insurance Rate Map designated in §117-6 (Basis for establishing areas of special flood hazard).

- A. The accessory structure must meet the definition of structure, for floodplain management purposes, provided in 44 CFR § 59.1, where walled and roofed shall be interpreted as having two outside rigid walls and a fully secured roof.
- B. The accessory structure should be small, as defined by the community and approved by FEMA, and represent a minimal investment. Accessory structures of any size may be considered for a variance; however, FEMA considers accessory structures that meet the following criteria to be small and therefore not necessarily in need of a variance, if the community chooses to allow it:
 - (1) Located in an A Zone (A, AE, A1-A30, AR, A99) and less than or equal to the size of a one-story, two-car garage.
 - (2) Located in a V Zone (V, VE, V1-V30) and less than or equal to 100 square feet.
- C. Accessory structures must meet the standards of § 117-16 A (Anchoring),
- D. The portions of the accessory structure located below BFE plus two feet of freeboard must be constructed with flood-resistant materials.
- E. Mechanical and utility equipment for the accessory structure must be elevated or dry floodproofed to or above BFE plus two feet of freeboard.
- F. Within Zones AO and Zone A, if base flood elevation data are not available, areas below three feet above the highest adjacent grade shall be constructed using methods and practices that minimize flood damage.
- G. The accessory structure must comply with the floodway encroachment provisions of the NFIP.
- H. The accessory structure must be wet floodproofed to protect the structure from hydrostatic pressure. The design must meet the NFIP design and performance standards for openings per 44 CFR § 60.3(c)(5) and must allow for the automatic entry and exit of floodwaters without manual operation or the presence of a person (or persons).
- I. Within Zones V1-V30, VE, V, and Coastal A, unelevated accessory buildings must be unfinished inside, constructed with flood-resistant materials, and used only for storage. When an accessory building is placed in these zones, the design professional must determine the effect that debris from the accessory building will have on nearby buildings. If the accessory building is large enough that its failure could create damaging debris or divert flood flows, it must be elevated above the base flood elevation plus two feet.
- J. Exempt from these requirements are fences and sheds, as defined in the Chapter 211 of the Code of the Town of Greece (Zoning Ordinance), which are located on single-family residential zoned property, located in a Town of Greece Flood Zone, as designated in §117-6 (Basis for establishing areas of special flood hazard).

ARTICLE VI
VARIANCE PROCEDURE

§117-23. Appeals Board.

- A. The Planning Board, as established by the Town of Greece shall hear and decide appeals and requests for variances from the requirements of this local law.
- B. The Planning Board shall hear and decide appeals when it is alleged there is an error in any requirement, decision, or determination made by the Local Administrator in the enforcement or administration of this local law.
- C. Those aggrieved by the decision of the Planning Board may appeal such decision to the Supreme Court pursuant to Article 78 of the Civil Practice Law and Rules.
- D. In passing upon such applications, the Planning Board, shall consider all technical evaluations, all relevant factors, standards specified in other sections of this chapter and:
 - (1) The danger that materials may be swept onto other lands to the injury of others;
 - (2) The danger to life and property due to flooding or erosion damage;
 - (3) The susceptibility of the proposed facility and its contents to flood damage and the effect of such damage on the individual owner;
 - (4) The importance of the services provided by the proposed facility to the community;
 - (5) The necessity to the facility of a waterfront location, where applicable;
 - (6) The availability of alternative locations for the proposed use which are not subject to flooding or erosion damage;
 - (7) The compatibility of the proposed use with existing and anticipated development;
 - (8) The relationship of the proposed use to the comprehensive plan and floodplain management program of that area;
 - (9) The safety of access to the property in times of flood for ordinary and emergency vehicles;
 - (10) The costs to local governments and the dangers associated with conducting search and rescue operations during periods of flooding;
 - (11) The expected heights, velocity, duration, rate of rise and sediment transport of the flood waters and the effects of wave action, if applicable, expected at the site; and
 - (12) The costs of providing governmental services during and after flood conditions, including search and rescue operations, maintenance and repair of public utilities and facilities such as sewer, gas, electrical, and water systems and streets and bridges
- F. Upon consideration of the factors of §117-23 D and the purposes of this local law, the Planning Board may attach such conditions to the granting of variances as it deems necessary to further the purposes of this chapter.

- G. The Local Administrator shall maintain the records of all appeal actions including technical information and report any variances to the Federal Emergency Management Agency upon request.

§117-24. Conditions of variances.


- A. Generally, variances may be issued for new construction and substantial improvements to be erected on a lot of one-half acre or less in size contiguous to and surrounded by lots with existing structures constructed below the base flood elevation, providing items (1-12) in §117-23 have been fully considered. As the lot size increases beyond the one-half acre, the technical justification required for issuing the variance increases.
- B. Variances may be issued for the repair or rehabilitation of historic structures upon determination that:
- (1) The proposed repair or rehabilitation will not preclude the structure's continued designation as a "Historic structure"; and
 - (2) The variance is the minimum necessary to preserve the historic character and design of the structure.
- C. Variances may be issued by a community for new construction and substantial improvements and for other development necessary for the conduct of a functionally dependent use provided that:
- (1) The criteria of §117-24 A, D, E, and F of this Section are met; and
 - (2) The structure or other development is protected by methods that minimize flood damages during the base flood and create no additional threat to public safety.
- D. Variances shall not be issued within any designated floodway if any increase in flood levels during the base flood discharge would result.
- E. Variances shall only be issued upon a determination that the variance is the minimum necessary, considering the flood hazard, to afford relief.
- F. Variances shall only be issued upon receiving written justification of:
- (1) A showing of good and sufficient cause;
 - (2) A determination that failure to grant the variance would result in exceptional hardship to the applicant; and
 - (3) A determination that the granting of a variance will not result in increased flood heights, additional threats to public safety, extraordinary public expense, create nuisances, cause fraud on or victimization of the public or conflict with existing local laws or ordinances.
- G. Any applicant to whom a variance is granted for a building with the lowest floor below the base flood elevation shall be given written notice over the signature of a community official that:
- (1) The issuance of a variance to construct a structure below the base flood level will result in increased premium rates for flood insurance up to amounts as high as \$25 for \$100 of insurance coverage; and

- (2) Such construction below the base flood level increases risks to life and property.
- (3) Such notification shall be maintained with the record of all variance actions as required in §117- 14 H (Information to be retained) of this chapter.

FLOOD DAMAGE PREVENTION

117 Attachment 1

Town of Greece

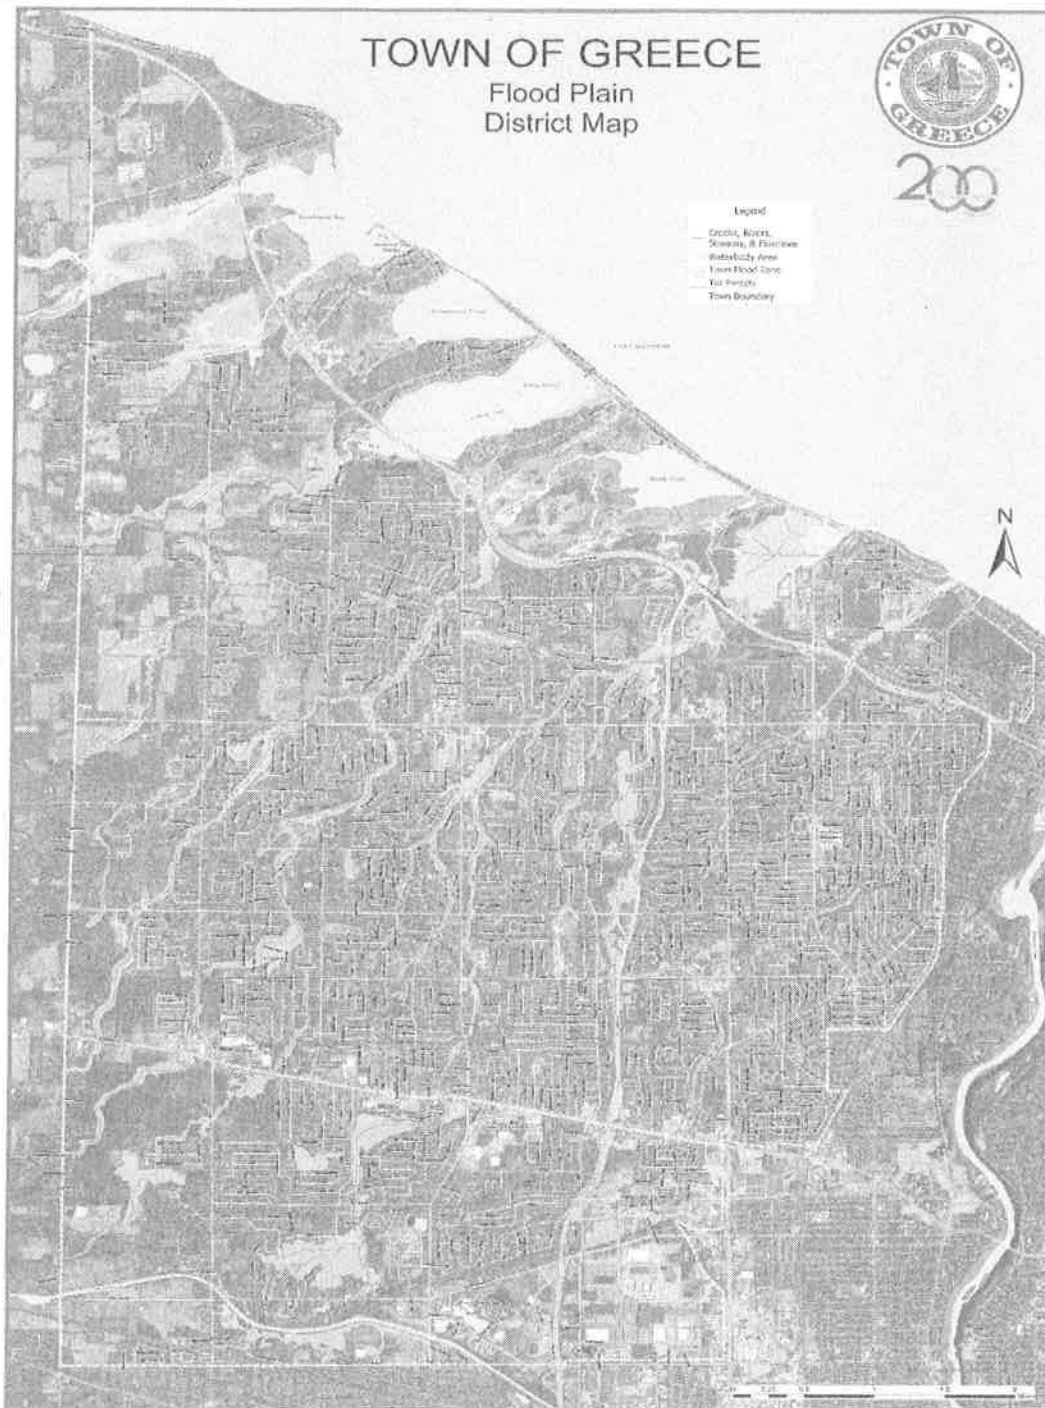

ADOPTED: Ayes 5
Nays 0

Reilich, DiPonzio, Bloomer, Murphy, Christodaro