

ORDINANCE 2022-04

AN ORDINANCE TO AMEND THE CODE OF THE TOWNSHIP OF SWATARA, PENNSYLVANIA, BY DELETING AND REPEALING CHAPTER 247 THEREOF, "STORMWATER MANAGEMENT", AND REPLACING IT WITH A NEW CHAPTER 247, TO BE ENTITLED "STORMWATER MANAGEMENT", WHICH CHAPTER PROVIDES FOR STORMWATER MANAGEMENT WITHIN THE TOWNSHIP OF SWATARA

BE IT ORDAINED AND ENACTED, AND IT IS HEREBY ORDAINED AND ENACTED by the Board of Commissioners of the Township of Swatara, as follows:

SECTION 1. The Code of the Township of Swatara, Pennsylvania, Chapter 247 "Stormwater Management" is hereby amended and revised in its entirety to read as follows:

Chapter 247

STORMWATER MANAGEMENT

ARTICLE I - GENERAL PROVISIONS

§ 247-1. Short Title

This Ordinance shall be known and may be cited as the "Swatara Township Stormwater Management Ordinance."

§ 247-2. Statement of Findings

The governing body of Swatara Township finds that:

- A. Inadequate management of accelerated stormwater runoff resulting from development throughout a watershed increases flood flows and velocities, contributes to erosion and sedimentation, overtaxes the carrying capacity of existing streams and storm sewers, greatly increases the cost of public facilities to convey and manage stormwater, undermines floodplain management and flood reduction efforts in upstream and downstream communities, reduces groundwater recharge, threatens public health and safety, and increases non-point source pollution of water resources.
- B. A comprehensive program of stormwater management, including reasonable regulation of development and activities causing accelerated runoff, is fundamental to the public health, safety, welfare, and the protection of the people

of Municipality and all the people of the Commonwealth, their resources, and the environment.

- C. Inadequate planning and management of stormwater runoff resulting from land development and redevelopment throughout a watershed can also harm surface water resources by changing the natural hydrologic patterns; accelerating stream flows (which increase scour and erosion of streambeds and stream banks thereby elevating sedimentation); destroying aquatic habitat; and elevating aquatic pollutant concentrations and loadings such as sediments, nutrients, heavy metals, and pathogens. Groundwater resources are also impacted through loss of recharge.
- D. Stormwater is an important water resource which provides groundwater recharge for water supplies and base flow of streams, which also protects and maintains surface water quality.
- E. Public education on the control of pollution from stormwater is an essential component in successfully addressing stormwater issues.
- F. Federal and state regulations require certain municipalities to implement a program of stormwater controls. These municipalities are required to obtain a permit for stormwater discharges from their separate storm sewer systems under the National Pollutant Discharge Elimination System (NPDES).
- G. Non-stormwater discharges to municipal separate storm sewer systems can contribute to pollution of Waters of the Commonwealth.

§ 247-3. Purpose

The purpose of this Ordinance is to promote health, safety, and welfare within Swatara Township, Dauphin County, by minimizing the harms and maximizing the benefits described in Section 102 of this Ordinance through provisions intended to:

- A. Meet legal water quality requirements under state law, including regulations at 25 PA Code Chapter 93 to protect, maintain, reclaim, and restore the existing and designated uses of the Waters of the Commonwealth.
- B. Manage accelerated runoff and erosion and sedimentation problems close to their source, by regulating activities that cause these problems.
- C. Preserve the natural drainage systems to the maximum extent practicable.
- D. Maintain groundwater recharge, to prevent degradation of surface and groundwater quality, and to otherwise protect water resources.
- E. Maintain existing flows and quality of streams and watercourses.

- F. Preserve and restore the flood-carrying capacity of streams and prevent scour and erosion of stream banks and streambeds.
- G. Manage stormwater impacts close to the runoff source, with a minimum of structures and a maximum use of natural processes.
- H. Provide procedures, performance standards, and design criteria for stormwater planning and management.
- I. Provide proper operations and maintenance of all temporary and permanent stormwater management facilities and Best Management Practices (BMPs) that are constructed and implemented.
- J. Provide standards to meet the NPDES permit requirements.
- K. Implement an "illegal discharge detection and elimination program" within MS4 permitted urbanized areas (as defined by the U.S. Census Bureau) to address non-stormwater discharges into Municipality's separate storm sewer system.

§ 247-4. Statutory Authority

A. Primary Authority:

Municipality is empowered to regulate these activities by the authority of the Act of October 4, 1978, 32 P.S., P.L. 864 (Act 167), 32 P.S. Section 680.1 et seq., as amended, the "Storm Water Management Act", and 53 P.S. § 55101, et. Seq., as amended, the "First Class Township Code."

B. Secondary Authority:

Municipality also is empowered to regulate land use activities that affect runoff by the authority of the Act of July 31, 1968, P.L. 805, No. 247, The Pennsylvania Municipalities Planning Code, as amended.

§ 247-5. Applicability

This Ordinance shall apply to all areas of the Municipality, any Regulated Activity within the Municipality, and all stormwater runoff entering into the Municipality's separate storm sewer system from lands within the boundaries of the Municipality.

Earth disturbance activities and associated stormwater management controls are also regulated under existing state law and implementing regulations. This Ordinance shall operate in coordination with those parallel requirements; the requirements of this Ordinance shall be no less restrictive in meeting the purposes of this Ordinance than state law.

"Regulated Activities" are any earth disturbance activities or any activities that involve the alteration or development of land in a manner that may affect stormwater runoff. "Regulated Activities" include, but are not limited to, the following listed items:

- A. Earth Disturbance Activities
- B. Land Development
- C. Subdivision
- D. Construction of new or additional impervious or semi-pervious surfaces
- E. Construction of new buildings or additions to existing buildings
- F. Diversion or piping of any natural or man-made stream channel
- G. Installation of stormwater management facilities or appurtenances thereto
- H. Installation of stormwater BMPs
- I. Removal of pervious cover with higher runoff mitigation for pervious cover with lower runoff mitigation

See Section 302 of this Ordinance for Exemption/Modification Criteria.

§ 247-6. Repealer

Any ordinance, ordinance provision(s), or regulation of Municipality inconsistent with any of the provision(s) of this Ordinance is hereby repealed to the extent of the inconsistency only.

§ 247-7. Severability

In the event that a court of competent jurisdiction declares any section(s) or provision(s) of this Ordinance invalid, such decision shall not affect the validity of any of the remaining section(s) or provision(s) of this Ordinance.

§ 247-8. Compatibility with Other Ordinance Requirements

Approvals issued and actions taken pursuant to this Ordinance do not relieve the Applicant of the responsibility to comply with or to secure required permits or approvals for activities regulated by any other applicable codes, laws, rules, statutes, or ordinances. To the extent that this Ordinance imposes more rigorous or stringent requirements for stormwater management, the specific requirements contained in this Ordinance shall be followed.

§ 247-9. Duty of Persons Engaged in the Development of Land

Notwithstanding any provision(s) of this Ordinance, including exemptions, any landowner or any person engaged in the alteration or development of land which may affect stormwater runoff characteristics shall implement such measures as are reasonably necessary to prevent injury to health, safety, or other property. Such measures also shall include actions as are required to manage the rate, volume, direction, and quality of resulting stormwater runoff in a manner which otherwise adequately protects health, property, and water quality.

ARTICLE II – TERMINOLOGY

§ 247-10. Definitions

For the purpose of this Ordinance, certain terms and words used herein shall be interpreted as follows:

- A. Words used in the present tense include the future tense; the singular number includes the plural; and the plural number includes the singular; words of masculine gender include feminine gender; and words of feminine gender include masculine gender.
- B. The word "includes" or "including" shall not limit the term to the specific example but is intended to extend its meaning to all other instances of like kind and character.
- C. The word "person" includes an individual, firm, association, organization, partnership, trust, company, corporation, or any other similar entity.
- D. The words "shall" and "must" are mandatory; the words "may" and "should" are permissive.
- E. The words "used or occupied" include the words "intended, designed, maintained, or arranged to be used, occupied or maintained".

Accelerated Erosion - The removal of the surface of the land through the combined action of human activity and natural processes at a rate greater than would occur because of the natural process alone.

Agricultural Activities - Activities associated with agriculture such as agricultural cultivation, agricultural operation, and animal heavy use areas. This includes the work of producing crops, tillage, land clearing, plowing, disking, harrowing, planting, harvesting crops, or pasturing and raising of livestock and installation of conservation measures. Construction of new buildings or impervious area is not considered an Agricultural Activity.

Alteration - As applied to land, a change in topography as a result of the moving of soil and rock from one location or position to another; changing of surface conditions by causing the surface to be more or less impervious; land disturbance.

Applicant - A landowner, developer, or other person who has filed an application for approval to engage in any Regulated Activities at a project site within Municipality.

Best Management Practices (BMPs) - Activities, facilities, designs, measures, or procedures used to manage stormwater impacts from Regulated Activities, to meet State Water Quality Requirements, to promote groundwater recharge, to reduce the rate of runoff, and to otherwise meet the purposes of this Ordinance. Stormwater BMPs are

commonly grouped into one of two broad categories or measures: “non-structural” or “structural”. “Non-structural” BMPs are measures referred to as operational and/or behavior-related practices that attempt to minimize the contact of pollutants with stormwater runoff; “structural” BMPs are measures that consist of a physical device or practice that is installed to capture and treat stormwater runoff. “Structural” BMPs include, but are not limited to, a wide variety of practices and devices, from large-scale wet ponds and constructed wetlands, to small-scale underground treatment systems, infiltration facilities, filter strips, low impact design, bioretention, wet ponds, permeable paving, grassed swales, riparian or forested buffers, sand filters, detention basins, and manufactured devices. “Structural” stormwater BMPs are permanent appurtenances to the project site.

BMP Manual - Shall mean the Pennsylvania Stormwater Best Management Practices Manual as published by the Department of Environmental Protection, Bureau of Watershed Management, document number: 363-0300-002, effective date: December 30, 2006, and as revised.

Carbonate Geology - Limestone or dolomite bedrock. Carbonate Geology is often associated with Karst topography.

Channel Erosion - The widening, deepening, and headward cutting of small channels and waterways, due to erosion caused by moderate to large floods.

Cistern - An underground reservoir or tank used for storing rainwater.

Conservation District - The Dauphin County Conservation District (DCCD). The Dauphin County Conservation District has the authority under a delegation agreement executed with the Department of Environmental Protection to administer and enforce all or a portion of the regulations promulgated under 25 PA Code Chapter 102.

Culvert - A structure with appurtenant works that carries a stream and/or stormwater runoff under or through an embankment or fill.

Dam - An artificial barrier, together with its appurtenant works, constructed for the purpose of impounding or storing water or another fluid or semifluid, or a refuse bank, fill or structure for highway, railroad or other purposes which does or may impound water or another fluid or semifluid.

Design Storm - The magnitude and temporal distribution of precipitation from a storm event measured in probability of occurrence (e.g., a 25-year storm) and duration (e.g., 24-hours), used in the design and evaluation of stormwater management systems. Also see Return Period.

Designee - The agent of the Municipality and/or agent of the governing body involved with the administration, review or enforcement of any provisions of this Ordinance by contract or memorandum of understanding.

Detention Basin - An impoundment structure designed to manage stormwater runoff by temporarily storing the runoff and releasing it at a predetermined rate.

Detention Volume - The volume of runoff that is captured and released during or after a storm event into Waters of the Commonwealth at a controlled rate.

Developer - A person, partnership, association, corporation, or other entity, or any responsible person therein or agent thereof, that undertakes any Regulated Activity of this Ordinance.

Development Site (Site) - See "Project Site".

Disturbed Area - An un-stabilized land area where an Earth Disturbance Activity is occurring or has occurred.

Downslope Property Line - That portion of the property line of the lot, tract, or parcels of land being developed located such that all overland or piped flow from the site would be directed toward it.

Drainage Conveyance Facility - A stormwater management facility designed to convey stormwater runoff and shall include streams, channels, swales, pipes, conduits, culverts, storm sewers, etc.

Drainage Easement - A right granted by a landowner to a grantee, allowing the use of private land for stormwater management, drainage, or conveyance purposes.

Drainageway - Any natural or artificial watercourse, trench, ditch, pipe, swale, channel, or similar depression into which surface water flows.

Earth Disturbance Activity - A construction or other human activity which disturbs the surface of the land, including, but not limited to, clearing and grubbing, grading, excavations, embankments, land development, agricultural plowing or tilling, timber harvesting activities, road maintenance activities, mineral extraction, and the moving, depositing, stockpiling, or storing of soil, rock or earth materials.

Erosion - The movement of soil particles by the action of water, wind, ice, or other natural forces.

Erosion and Sediment Pollution Control Plan - A plan which is designed to minimize accelerated erosion and sedimentation.

Exceptional Value Waters - Surface waters of high quality, which satisfies PA Code Title 25 Environmental Protection, Chapter 93 Water Quality Standards 93.4b(b) (relating to anti - degradation).

Existing Conditions - The dominant land cover during the 5-year period immediately preceding a proposed regulated activity. If the initial condition of the site is undeveloped land, the land use shall be considered as "meadow" unless the natural land cover is documented to generate lower Curve Numbers or Rational "C" Coefficients, such as forested lands.

FEMA - The Federal Emergency Management Agency.

Flood - A general but temporary condition of partial or complete inundation of normally dry land areas from the overflow of streams, rivers, and other Waters of the Commonwealth.

Flood Fringe - The remaining portions of the one hundred (100) year floodplain outside of the floodway boundary.

Floodplain - Any land area susceptible to inundation by water from any natural source or delineated by applicable Department of Housing and Urban Development, Federal Insurance Administration Flood Hazard Boundary - mapped as being a special flood hazard area. Included are lands adjoining a river or stream that have been or may be inundated by a 100- year flood. Also included are areas that comprise Group 13 Soils, as listed in Appendix A of the Pennsylvania Department of Environmental Protection (PADEP) Technical Manual for Sewage Enforcement Officers (as amended or replaced from time to time by PADEP).

Floodway - The channel of the watercourse and those portions of the adjoining floodplains that are reasonably required to carry and discharge the 100-year frequency flood. Unless otherwise specified, the boundary of the floodway is as indicated on maps and flood insurance studies provided by FEMA. In an area where no FEMA maps or studies have defined the boundary of the 100-year frequency floodway, it is assumed - absent evidence to the contrary - that the floodway extends from the stream to 50 feet from the top of the bank of the stream.

Forest Management/Timber Operations - Planning and activities necessary for the management of forestland. These include timber inventory and preparation of forest management plans, silvicultural treatment, cutting budgets, logging road design and construction, timber harvesting, site preparation and reforestation.

Freeboard - A vertical distance between the elevation of the design high water and the top of a dam, levee, tank, basin, or diversion ridge. The space is required as a safety margin in a pond or basin.

Geologist - An individual licensed and registered under the laws of the Commonwealth of Pennsylvania to engage in the practice of geology.

Grade - A slope, usually of a road, channel or natural ground specified in percent and shown on plans as specified herein.

(To) Grade - To finish the surface of a roadbed, top of embankment or bottom of excavation.

Groundwater Recharge - Replenishment of existing natural underground water supplies.

HEC-HMS Model Calibrated - (Hydrologic Engineering Center Hydrologic Modeling System) A computer-based hydrologic modeling technique adapted to the watersheds in Dauphin County for the Act 167 Plan. The model has been calibrated by adjusting key model input parameters.

High Quality Waters - Surface water having quality, which exceeds levels necessary to support propagation of fish, shellfish, and wildlife and recreation in and on the water by satisfying PA Code Title 25 Environmental Protection, Chapter 93 Water Quality Standards 93.4b(a).

Hydrologic Soil Group (HSG) - Infiltration rates of soils vary widely and are affected by subsurface permeability as well as surface intake rates. Soils are classified into one of four HSG (A, B, C, and D) according to their minimum infiltration rate, which is obtained for bare soil after prolonged wetting. The Natural Resource Conservation Service (NRCS) of the US Department of Agriculture defines the four groups and provides a list of most of the soils in the United States and their group classification. The soils in the area of interest may be identified from a soil survey report from the local NRCS office or the Dauphin County Conservation District.

Impervious Surface (Impervious Area) - A surface that prevents the infiltration of water into the ground. Impervious surfaces (or areas) shall include, but are not limited to: roofs, additional indoor living spaces, patios and similar structures (including but not limited to those made of wood or other planks if constructed over another impervious surface), garages, storage sheds and similar structures, driveways, and any new streets and sidewalks. Any surface area that is gravel or crushed stone shall be assumed to be impervious if the material is subject to vehicular traffic or is not comprised entirely of clean, washed stone.

Infiltration Structures - A structure designed to direct runoff into the ground (e.g., french drains, seepage pits, seepage trench, etc.).

Inlet - A surface connection to a closed drain; a structure at the diversion end of a conduit; the upstream end of any structure through which water may flow.

Karst - A type of topography or landscape characterized by surface depressions, sinkholes, rock pinnacles/uneven bedrock surface, steep-sided hills, underground drainage and caves. Karst is formed on carbonate rocks, such as limestone or dolomites and sometimes gypsum.

Land Development (Development) - As defined in the Municipality's Subdivision and Land Development Ordinance.

Limit of Disturbance - A line provided on the SWM Site Plan that indicates the total area to be disturbed during a proposed earth disturbance activity.

Main Stem (Main Channel) - Any stream segment or other runoff conveyance facility used as a reach in an approved Act 167 watershed hydrologic model(s).

Manning Equation (Manning Formula) - A method for calculation of velocity of flow (e.g., feet per second) and flow rate (e.g., cubic feet per second) in open channels based upon channel shape, roughness, depth of flow and slope. "Open channels" may include closed conduits so long as the flow is not under pressure.

Municipality – Swatara Township, Dauphin County, Pennsylvania.

National Pollutant Discharge Elimination System (NPDES) - The federal government's system for issuance of permits under the Clean Water Act, which is delegated to PADEP in Pennsylvania.

NOAA Atlas 14 - Precipitation-Frequency Atlas of the United States, Atlas 14, Volume 2, US Department of Commerce, National Oceanic and Atmosphere Administration, National Weather Service, Hydrometeorological Design Studies Center, Silver Spring, Maryland (2004).

Non-point Source Pollution - Pollution that enters a water body from diffuse origins in the watershed and does not result from discernible, confined, or discrete conveyances.

NRCS - Natural Resource Conservation Service (previously Soil Conservation Service (SCS)).

Open Channel - A drainage element in which stormwater flows with an open surface. Open channels include, but shall not be limited to, natural and man-made drainageways, swales, streams, ditches, canals, and pipes not under pressure.

Outfall - (i) Point where water flows from a conduit, stream, or drain; (ii) "Point Source" as described in 40 CFR § 122.2 at the point where the Municipality's storm sewer system discharges to surface Waters of the Commonwealth.

Outlet - Points of water disposal from a stream, river, lake, tidewater, or artificial drain.

PADEP - The Pennsylvania Department of Environmental Protection.

Peak Discharge - The maximum rate of stormwater runoff from a specific storm event.

Person - An individual, partnership, public or private association or corporation, or a governmental unit, public utility or any other legal entity whatsoever which is recognized by law as the subject of rights and duties.

Pervious Surface (Pervious Area) - Any area not defined as Impervious Surface.

Pipe - A culvert, closed conduit, or similar structure (including appurtenances) that conveys stormwater.

Planning Commission - The Planning Commission of the Municipality.

Point Source - Any discernible, confined, or discrete conveyance, including, but not limited to: any pipe, ditch, channel, tunnel, or conduit from which stormwater is or may be discharged, as defined in State regulations at 25 Pennsylvania Code § 92.1.

Probable Maximum Flood (PMF) - The flood that may be expected from the most severe combination of critical meteorological and hydrologic conditions that are reasonably possible in any area. The PMF is derived from the probable maximum precipitation (PMP) as determined on the basis of data obtained from the National Oceanographic and Atmospheric Administration (NOAA).

Project Site - The specific area of land where any Regulated Activities in the Municipality are planned, conducted, or maintained.

Qualified Professional - Any person licensed by the Pennsylvania Department of State or otherwise qualified by law to perform the work required by this Ordinance.

Rational Formula - A rainfall-runoff relation used to estimate peak flow.

Redevelopment - Earth disturbance activities on land, which has previously been developed.

Regulated Activities - Any earth disturbance activities or any activities that involve the alteration or development of land in a manner that may affect stormwater runoff.

Regulated Earth Disturbance Activity - Activity involving Earth Disturbance subject to regulation under 25 PA Code Chapter 92, Chapter 102, or the Clean Streams Law. Examples include, but are not limited to, grading land for the installation of improvements, digging trenches, and other items which disturb soil.

Release Rate - The percentage of pre-development peak rate of runoff from a site or subwatershed area to which the post-development peak rate of runoff must be reduced to protect downstream areas.

Release Rate District - Those subwatershed areas in which post-development flows must be reduced to a certain percentage of pre-development flows as required to meet the plan requirements and the goals of an approved Act 167 plan.

Retention Volume/Removed Runoff - The volume of runoff that is captured and not released directly into the surface Waters of this Commonwealth during or after a storm event.

Return Period - The average interval, in years, within which a storm event of a given magnitude can be expected to recur. For example, the probability of a 25-year storm occurring in any one given year is 0.04 (i.e. a 4% chance).

Riparian Buffer - A permanent area of trees and shrubs located adjacent to streams, lakes, ponds, and wetlands.

Riser - A vertical pipe extending from the bottom of a pond that is used to control the discharge rate from the pond for a specified design storm.

Road Maintenance - Earth disturbance activities within the existing road right-of-way, such as grading and repairing existing unpaved road surfaces, cutting road banks, cleaning or clearing drainage ditches, and other similar activities. Road maintenance activities that do not disturb the subbase of a paved road such as milling and pavement overlays are not considered earth disturbance activities.

Runoff - Any part of precipitation that flows over the land surface.

Runoff Capture Volume - The volume of runoff that is captured (retained) and not released into surface Waters of the Commonwealth during or after a storm event.

Sediment - Soils or other materials transported by surface water as a product of erosion.

Sediment Basin - A barrier, dam, or detention basin located and designed to retain rock, sand, gravel, silt, or other material transported by stormwater runoff.

Sediment Pollution - The placement, discharge, or any other introduction of sediment into Waters of the Commonwealth occurring from the failure to properly design, construct, implement or maintain control measures and control facilities in accordance with the requirements of this Ordinance.

Sedimentation - The process by which mineral or organic matter is accumulated or deposited by the movement of water.

Seepage Pit/Seepage Trench - An area of excavated earth filled with loose stone or similar coarse material, into which surface water is directed for infiltration into the ground.

Separate Storm Sewer System - A conveyance or system of conveyances (including roads with drainage systems, Municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains) primarily used for collecting and conveying stormwater runoff. Often referenced as part of "MS4" regulations (Municipal Separate Storm Sewer System).

Sheet Flow - Runoff that flows over the ground surface as a thin, even layer that is not concentrated in a channel.

Soil Cover Complex Method - A method of runoff computation developed by the NRCS that is based on relating soil type and land use/cover to a runoff parameter called Curve Number (CN).

Spillway (Emergency) - A depression in the embankment of a pond or basin, or other overflow structure, that is used to pass peak discharges greater than the maximum design storm controlled by the pond or basin.

State Water Quality Requirements - The regulatory requirements to protect, maintain, reclaim, and restore water quality under Title 25 of that Pennsylvania Code and the Clean Streams Law

Storage Indication Method - A reservoir routing procedure based on solution of the continuity equation (inflow minus outflow equals the change in storage) with outflow defined as a function of storage volume and depth.

Storm Frequency - The number of times that a given storm "event" occurs or is exceeded on the average in a stated period of years. See also Return Period.

Stormsewer - A system of pipes and/or open channels that convey intercepted runoff and stormwater from other sources, but excludes domestic sewage and industrial wastes.

Stormwater - Drainage runoff from the surface of the land resulting from precipitation, snow, or ice melt.

Stormwater Hotspot - A land use or activity that generates higher concentrations of hydrocarbons, trace metals, or toxicants than are found in typical stormwater runoff.

Stormwater Management Facilities - Any structure, natural or man-made, that, due to its condition, design, or construction; conveys, stores, or otherwise affects stormwater runoff. Typical stormwater management facilities include, but are not limited to: detention basins, wet ponds, open channels, storm sewers, pipes and infiltration facilities.

Stormwater Management Plan - The Dauphin County Stormwater Management Plan for managing stormwater runoff in Dauphin County as required by the Act of October 4, 1978, 864, (Act 167) and known as the "Storm Water Management Act".

Stormwater Management Site Plan (SWM Site Plan) - The plan prepared by the Applicant or his representative indicating how stormwater runoff will be managed at the project site in accordance with this Ordinance.

Stream Enclosure - A bridge, culvert, or other structure in excess of 100 feet in length upstream to downstream which encloses regulated Waters of the Commonwealth.

Subwatershed Area - The smallest drainage unit of a watershed for which stormwater

management criteria has been established in a Stormwater Management Site Plan.

Subdivision - As defined in the Municipality's Subdivision and Land Development Ordinance.

Swale - A low-lying stretch of land that gathers or carries surface water runoff.

Timber Operations - See "Forest Management".

Time of Concentration (Tc) - The time for surface runoff to travel from the hydraulically most distant point of the watershed to a point of interest within the watershed. This time is the combined total of overland flow time and flow time in pipes or channels, if any.

USDA - The United States Department of Agriculture.

Watercourse - A channel or conveyance of surface water, such as a stream or creek, having defined bed and banks, whether natural or artificial, with perennial or intermittent flow. Waters of the Commonwealth - Rivers, streams, creeks, rivulets, impoundments, ditches, watercourses, storm sewers, lakes, dammed water, wetlands, ponds, springs and other bodies or channels of conveyance of surface and underground water, or parts thereof, whether natural or artificial, within or on the boundaries of the Commonwealth of Pennsylvania.

Watershed - Region or area drained by a river, watercourse, or other surface water, whether natural or artificial.

Wetland - Those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions, including swamps, marshes, bogs and similar areas. (The term includes but is not limited to wetland areas listed in the State Water Plan, the United States Forest Service Wetlands Inventory of Pennsylvania, the Pennsylvania Coastal Zone Management Plan and a wetland area designated by a river basin commission. This definition is used by the United States Environmental Protection Agency and the United States Army Corps of Engineers.)

ARTICLE III - STORMWATER MANAGEMENT STANDARDS

§ 247-11. General Requirements

- A. For all Regulated Activities, unless specifically exempted in Section 302:
1. Preparation and implementation of an approved SWM Site Plan is required.
 2. No Regulated Activities shall commence until the Municipality issues a Major Stormwater Permit or Minor Stormwater Permit, which demonstrates compliance with the requirements of this Ordinance.
 3. The SWM Site Plan shall demonstrate that adequate capacity will be provided to meet the Volume and Rate Control Requirements as described under Sections 303 and 304 of this Ordinance.
 4. The SWM Site Plan and Stormwater Permit approved by the Municipality shall be on-site throughout the duration of the Regulated Activities.
- B. For all Regulated Earth Disturbance Activities, erosion and sediment control BMPs shall be designed, implemented, operated, and maintained during the Regulated Earth Disturbance Activities (e.g., during construction) to meet the purposes and requirements of this Ordinance and to meet all requirements under Title 25 of the Pennsylvania Code (including, but not limited to Chapter 102 Erosion and Sediment Control) and the Clean Streams Law. Various BMPs and their design standards are listed in the Erosion and Sediment Pollution Control Program Manual (E&S Manual), No. 363-2134-008 (April 15, 2000), as amended and updated.
- C. For all Regulated Activities, stormwater BMPs shall be designed, installed, implemented, operated, and maintained to meet the purposes and requirements of this Ordinance and to meet all requirements under Title 25 of the Pennsylvania Code and the Clean Streams Law, conform to the State Water Quality Requirements, meet all requirements under the Storm Water Management Act and any more stringent requirements as determined by the Municipality.
- D. The Municipality may, after consultation with PADEP and/or DCCD, approve measures for meeting the State Water Quality Requirements other than those in this Ordinance, provided that they meet the minimum requirements of, and do not conflict with, state law including, but not limited to, the Clean Streams Law.
- E. All Regulated Activities shall include, to the maximum extent practicable, measures to:
1. Protect health, safety, and property.
 2. Meet the water quality goals of this Ordinance by implementing measures to:

- a. Minimize disturbance to floodplains, wetlands, natural slopes, existing native vegetation and woodlands.
 - b. Create, maintain, or extend riparian buffers and protect existing forested buffers.
 - c. Provide trees and woodlands adjacent to impervious areas whenever feasible.
 - d. Minimize the creation of impervious surfaces and the degradation of Waters of the Commonwealth and promote groundwater recharge.
 - e. Protect natural systems and processes (drainageways, vegetation, soils, and sensitive areas) and maintain, as much as possible, the natural hydrologic regime.
 - f. Incorporate natural site elements (wetlands, stream corridors, mature forests) as design elements.
 - g. Avoid erosive flow conditions in natural flow pathways.
 - h. Minimize soil disturbance and soil compaction.
 - i. Minimize thermal impacts to Waters of the Commonwealth.
 - j. Disconnect impervious surfaces by directing runoff to pervious areas wherever possible and decentralize and manage stormwater at its source.
3. Applicants are encouraged to incorporate the techniques for Low Impact Development Practices described in the "Pennsylvania Stormwater Best Management Practices Manual (BMP Manual)" to reduce the costs of complying with the requirements of this Ordinance and the State Water Quality Requirements.

F. Impervious Areas:

1. The measurement of impervious areas shall include all of the impervious areas in the total proposed development, even if development is to take place in stages.
2. For development taking place in stages, the entire development plan must be used in determining conformance with this Ordinance.
3. For projects that add impervious area to a developed parcel, the new impervious area is subject to the requirements of this Ordinance; and any existing impervious area that is within the new proposed limit of disturbance is also subject to the requirements of this Ordinance.

- G. If diffused flow is proposed to be concentrated and discharged onto adjacent property, the Applicant must document that adequate downstream conveyance facilities exist to safely transport the concentrated discharge, or otherwise prove that no erosion, sedimentation, flooding, or other harm will result from the concentrated discharge.
1. The applicant must demonstrate the post-development peak discharge depth and velocity across the adjoining property is no greater than the pre-development condition during a one hundred (100) year storm event; and that it will not result in concentrated flow erosion during a ten (10) year - twenty-four (24) hour storm event.
 2. Applicant must provide an executed easement for newly concentrated flow across adjacent properties, if it cannot be demonstrated that the requirements in Section 11.G.1 above have been achieved.
- H. Stormwater drainage systems shall be provided in order to permit unimpeded flow along natural watercourses, except as modified by stormwater management facilities or open channels consistent with this Ordinance.
- I. Where watercourses traverse a development site, drainage easements projecting at least 5' from the extents of the watercourse (with a minimum width of 20 feet) shall be provided conforming to the line of such watercourses. The terms of the easement shall prohibit excavation, the placing of fill or structures, and any alterations that may adversely affect the flow of stormwater within any portion of the easement. Also, maintenance, including mowing of vegetation within the easement, may be required except as approved by the appropriate governing authority.
- J. When it can be shown that, due to topographic conditions, natural drainageways on the site cannot adequately provide for drainage, open channels may be constructed conforming substantially to the line and grade of such natural drainageways. Work within natural drainage ways shall be subject to approval by PADEP under regulations at 25 PA Code Chapter 105..
- K. Any stormwater management facilities or any facilities that constitute water obstructions (e.g., culverts, bridges, outfalls, or stream enclosures, etc.) that are regulated by this Ordinance, that will be located in or adjacent to Waters of the Commonwealth (including wetlands), shall be subject to approval by PADEP under regulations at 25 PA Code Chapter 105. When there is a question whether wetlands may be involved, it is the responsibility of the Applicant or his agent to show that the land in question cannot be classified as wetlands; otherwise, approval to work in the area must be obtained from PADEP.
- L. Should any stormwater management facility require a dam safety permit under PADEP Chapter 105, the facility shall be designed in accordance with Chapter 105 and meet the regulations of Chapter 105 concerning dam safety which may be required to pass storms larger than 100-year event.

- M. Any stormwater management facilities regulated by this Ordinance that will be located on, or discharged onto State highway rights-of-ways shall be subject to approval by the Pennsylvania Department of Transportation (PennDOT).
- N. When stormwater management facilities are proposed within 1,000 feet of a downstream Municipality, the stormwater analysis shall be submitted to the downstream Municipal's engineer for review and comment.
- O. Infiltration of runoff through seepage beds, infiltration trenches, etc., and the minimization of impervious surfaces are encouraged, where soil conditions and geology permit, to reduce the size or eliminate the need for detention facilities.
- P. Infiltration BMPs should be dispersed throughout the site, made as shallow as practicable, and located to maximize use of natural on-site infiltration features while still meeting the other requirements of this Ordinance.
- Q. It shall be the applicant's responsibility to verify if the project site is underlain by Carbonate Geology. Stormwater shall not be discharged into sinkholes or other karst features as described below. Whenever a Stormwater management facility will be located in an area underlain by Carbonate Geology, a geological evaluation of the proposed location shall be conducted to determine the design parameters of proposed BMPs. The evaluation may include the use of impermeable liners to reduce or eliminate the separation distances. The design of facilities over karst shall include an evaluation and implementation of measures to minimize adverse effects, shall be designed in accordance with the PA BMP Manual, and must include a Carbonate Geology Report prepared by a registered Pennsylvania Geologist or Engineer, which shall include the following:
1. The evaluation of soil permeability, depth to bedrock, seasonal high-water table, susceptibility for sinkhole formation, suitability of Stormwater Management Facilities, subgrade stability, and maximum infiltration capacity in depth of water per unit area.
 2. The location of the following Karst features:
 - a. Sinkholes.
 - b. Closed depressions.
 - c. Lineaments in carbonate areas.
 - d. Fracture traces.
 - e. Caverns.
 - f. Intermittent lakes.
 - g. Ephemeral and Disappearing Streams.
 - h. Bedrock pinnacles (surface or subsurface)

3. The design of all Stormwater Management Facilities over Karst features shall include an evaluation of measures to minimize adverse effects and to prevent groundwater contamination, and where necessary, sinkhole formation.
 4. A plan for remediation of any identified Karst features.
 5. Impacts of Stormwater Management Facilities on adjacent Karst features and impacts of Karst features on adjacent Stormwater Management Facilities.
- R. Roof drains shall not be connected to streets, sanitary or storm sewers, or roadside ditches in order to promote overland flow and infiltration/percolation of stormwater where it is advantageous to do so. When it is more advantageous to connect directly to streets or storm sewers, then the Municipality may at its discretion permit it on a case-by-case basis.

§ 247-12. Exemptions/Modifications

- A. Under no circumstance shall the Applicant be exempt from implementing such measures as necessary to:
1. Meet State Water Quality Standards and Requirements.
 2. Protect health, safety, and property.
 3. Meet special requirements for High Quality (HQ) and Exceptional Value (EV) watersheds.
- B. The Applicant must demonstrate that the following BMPs are being utilized to the maximum extent practicable to receive consideration for the exemptions:
1. Design around and limit disturbance of Floodplains, Wetlands, Natural Slopes over 15%, existing native vegetation, and other sensitive and special value features.
 2. Maintain riparian and forested buffers.
 3. Limit grading and maintain non-erosive flow conditions in natural flow paths.
 4. Maintain existing tree canopies near impervious areas.
 5. Minimize soil disturbance and reclaim disturbed areas with topsoil and vegetation.
 6. Direct runoff to pervious areas.
- C. The Applicant must demonstrate that the proposed development/additional impervious area will not adversely impact the following:

1. Capacities of existing drainageways and storm sewer systems.
 2. Velocities and erosion.
 3. Quality of runoff if direct discharge is proposed.
 4. Existing known problem areas.
 5. Safe conveyance of the additional runoff.
 6. Downstream property owners.
- D. Applicants for small projects may qualify for reduced requirements based on the following:
1. The applicant must demonstrate compliance with 12.A, 12.B, and 12.C above.
 2. Reduced requirements will be according to the following Table 2. For the purpose of assessing stormwater permit requirements, the impervious areas described in Table 2 shall be cumulative starting at the date of adoption of this ordinance.

TABLE 2 – REDUCED STORMWATER MANAGEMENT REQUIREMENTS

Impervious and/or Disturbed Area (SF)	Applicant Must Submit to the Municipality
<p align="center"><u>Exempt</u></p> <p align="center">0 – 999 SF new impervious area and 0 – 4,999 SF disturbed area</p>	<p align="center">---</p>
<p align="center"><u>Minor Stormwater Management</u></p> <p align="center">1,000 – 2,999 SF new impervious area and 5,000 – 43,559 SF disturbed area and Hydrologic Soil Group A, B, or C soils</p>	<p align="center"><u>Minor Stormwater Permit:</u> Site Design Worksheets and Sketch Plan (Appendix D), volume controls, Operation and Maintenance Agreement, and Financial Security</p>
<p align="center"><u>Major Stormwater Management</u></p> <p align="center">3,000 SF or more new impervious area Or 43,560 SF or more disturbed area Or Hydrologic Soil Group D soils</p>	<p align="center"><u>Major Stormwater Permit:</u> SWM Site Plan & Report, Volume and Rate controls, Operation and Maintenance Agreement, and Financial Security</p>

3. REQUIREMENT FOR ADDITIONAL STORMWATER MANAGEMENT CONTROLS

- a. The municipal governing body reserves the right to require additional stormwater management controls if an exempted project is determined to be causing adverse impacts of any kind (i.e., land cover changes).

4. OBLIGATION TO MEET OTHER REQUIREMENTS

- a. Nothing in this section shall relieve the applicant of any responsibility under other regulations such as, but not limited to, municipal ordinances or codes and state and federal regulations related to stormwater management, NPDES permitting requirements for erosion and sediment pollution control and Post Construction Stormwater Management, stream and wetland encroachment or floodplain management.

E. The purpose of this section is to ensure consistency of stormwater management planning between local ordinances and NPDES permitting (when required) and to ensure that the Applicant has a single and clear set of stormwater management standards to which the Applicant is subject. The Municipality may accept alternative stormwater management controls provided that:

1. The Applicant, in consultation with the Municipality, PADEP and/or DCCD, states that meeting the requirements of the Volume Controls or Rate Controls of this Ordinance is not possible or creates an undue hardship.
 2. The alternative stormwater management controls, proposed by the Applicant, are documented to be acceptable to the Municipality, PADEP and/or DCCD for NPDES requirements pertaining to post construction stormwater management requirements.
 3. The alternative stormwater management controls are in compliance with all other sections of this Ordinance, including but not limited to sections 301.D, 302.A, 302.B and 302.C.
- F. Forest management and timber operations are exempt from Rate and Volume Control requirements and SWM Site Plan preparation requirement of this Ordinance provided the activities are performed according to the requirements of 25 PA Code Chapter 102. It should be noted that temporary roadways are not exempt.
- G. Agricultural activities are exempt from the requirements of this Ordinance provided the activities are performed according to the requirements of 25 PA Code Chapter 102.
- H. Linear roadway improvement projects that create additional impervious area are not exempt from the requirements of this Ordinance. However, alternative stormwater management strategies may be applied at the joint approval of the Municipality and the Dauphin County Conservation District (if an NPDES permit is required) when site limitations (such as limited right-of-way) and constraints (as shown and provided by the Applicant) preclude the ability of the Applicant to meet the enforcement of the stormwater management standards in this Ordinance. All strategies must be consistent with PADEP's regulations, including NPDES requirements.
- I. The Municipality may, after an Applicant has demonstrated compliance with Sections 12.A, 12.B, and 12.C, grant a modification of the requirements of one or more provisions of this Ordinance if the literal enforcement will exact undue hardship because of peculiar conditions pertaining to the land in question, provided that such modification will not be contrary to the public interest and that the purpose and intent of the Ordinance is observed.
1. All requests for a modification shall be in writing and shall state in full the grounds and facts of unreasonableness or hardship on which the request is based, the provision or provisions of the Ordinance involved, and the minimum modification necessary.
- J. All requests or exemptions or modifications shall be at the discretion of the municipal governing body. Demonstration that a proposed project meets exemption or modification requirements does not necessarily obligate the municipal governing body to grant the request for exemption or modification.

The municipal governing body may consider any and all relevant factors such as, but not limited to, runoff concentration, slope, soil characteristics, existing problems, adjacent properties, sensitive environmental features and recommendations from other municipal entities such as planning commissions, municipal engineers and solicitors in determining whether or not to grant any request for exemption or modification.

§ 247-13. Volume Controls

- A. The Low Impact Development Practices provided in the BMP Manual and in Appendix B of this Ordinance shall be utilized for all Regulated Activities to the maximum extent practicable.
- B. Stormwater runoff Volume Controls shall be implemented using the Design Storm Method or the Simplified Method. For Regulated Activities equal to or less than one (1) acre, this Ordinance establishes no preference for either method; therefore, the Applicant may select either method on the basis of economic considerations, the intrinsic limitations on applicability of the analytical procedures associated with each methodology, and other factors.
 - 1. The Design Storm Method (CG-1 in the BMP Manual) is applicable to any sized Regulated Activity. This method requires detailed modeling based on site conditions.
 - a. Do not increase the post-development total runoff volume when compared to the pre-development total runoff volume for the 2-year/24- hour storm event.
 - b. For hydrologic modeling purposes:
 - i. Existing non-forested pervious areas must be considered meadow (good condition) for pre-development hydrologic calculations.
 - ii. Twenty (20) percent of existing impervious area, when present on the proposed project site, and contained within the new proposed limit of disturbance, shall be considered meadow (good condition) for pre-development hydrologic calculations for re-development.
 - 2. The Simplified Method (CG-2 in the BMP Manual) is independent of site conditions and should be used if the Design Storm Method is not followed. This method is not applicable to Regulated Activities greater than one (1) acre. For new impervious surfaces:
 - a. Stormwater facilities shall capture at least the first two (2) inches of runoff from all new impervious surfaces.
 - b. At least the first one (1) inch of runoff from new impervious surfaces shall be permanently removed from the runoff flow, i.e. it shall not be released into

surface Waters of the Commonwealth. Removal options include reuse, evaporation, transpiration, and infiltration.

- c. Wherever possible, infiltration facilities should be designed to accommodate infiltration of the entire permanently removed runoff; however, in all cases at least the first one-half (0.5) inch of the permanently removed runoff should be infiltrated.
- C. For Major Stormwater Permits, all applicable worksheets from Chapter 8 of the BMP Manual must be used when establishing Volume Controls.
 - D. For Minor Stormwater Permits, the applicant may utilize the Site Design Worksheet provided in Appendix D. If the applicant for a Minor Stormwater Permit does not wish to use any of the BMP types outlined in Appendix D, all applicable worksheets from Chapter 8 of the BMP Manual must be used when establishing Volume Controls.
 - E. For Major Stormwater Permits, actual field infiltration tests at the location of the proposed elevation of the stormwater BMPs are required. Infiltration test shall be conducted in accordance with BMP Manual. The Municipality shall be notified 24-hours prior to infiltration tests being conducted as to provide an opportunity for the Municipality to witness the tests.
 - F. For Minor Stormwater Permits, infiltration tests are not required provided that the proposed BMP is not located with Hydrologic Soil Group D soils.

§ 247-14. Rate Controls

- A. For lands contained within Swatara Township, Dauphin County that have not had release rates established under an approved Act 167 Stormwater Management Plan:
 1. Post-development discharge rates shall not exceed 90% of the pre-development discharge rates for the 1-year, 2-year, 10-year, 25-year, 50-year, and 100-year storms.
- B. For lands contained within Swatara Township, Dauphin County that have had release rates established under an approved Act 167 Stormwater Management Plan:
 1. Post-development discharge rates shall not exceed of the pre-development discharge rates for the 1-year, 50-year, and 100-year storms.
 2. For the 2-year, 10-year, and 25-year storms, the post-development peak discharge rates shall be in accordance with the approved release rate map for the individual watershed as described in the approved Act 167 Stormwater Management Plan.
- C. Evaporation, evapotranspiration, and/or any other environmentally-dependent discharge rates are prohibited in the modeling of rate controls.

ARTICLE IV - E&S STANDARDS

§ 247-15. Erosion and Sedimentation Requirements During Earth Disturbance Activities

- A. The applicant shall meet requirements as contained in 25 PA Code, Chapters 92 and 102 as required and applicable as follows:
1. The implementation and maintenance of erosion and sediment control BMPs.
 2. Development of written plans.
 3. Submission of plans for approval.
 4. Obtaining Erosion and Sediment Control and NPDES permits.
 5. Maintaining plans and permits on site.
- B. Evidence of any necessary plan or permit approval for Earth Disturbance activities from PADEP or the Dauphin County Conservation District must be provided to the Municipality.
- C. A copy of the approved Erosion and Sediment Control Plan and any other permit, as required by PADEP or the Dauphin County Conservation District, shall be available at the project site at all times if required under Chapter 102.
- D. Construction of temporary roadways (e.g., for utility construction, timber harvesting, etc.) shall comply with all applicable standards for erosion and sedimentation control and stream crossing regulations under 25 PA Code, Chapters 102 and 105. The Erosion and Sedimentation Control Plan shall be submitted to the Dauphin County Conservation District for approval and shall address the following, as applicable:
1. Design of the roadway system, including haul roads, skid roads, landing areas, trails, and storage and staging areas.
 2. Runoff control structures (e.g., diversions, culverts, detention ponds, etc.).
 3. Stream crossings for both perennial and intermittent streams.
 4. Access to public roadways, including design of rock construction entrance for mud and debris control.
 5. A remediation plan for restoring the disturbed area through re-grading, topsoil placement, reseeding, and other stabilization techniques, as required.
- E. Additional erosion and sedimentation control design standards and criteria that must

be applied where infiltration BMPs are proposed include the following:

1. Areas proposed for infiltration BMPs shall be protected from sedimentation and compaction during the construction phase, as to maintain their maximum infiltration capacity.
2. Infiltration BMPs shall be protected from receiving sediment-laden runoff.
3. The source of protection for infiltration BMPs shall be identified (i.e. orange construction fence surrounding the perimeter of the BMP).

§ 247-16. Total Maximum Daily Load (TMDL) Requirements

- A. Agricultural activities contributory to a watershed within Dauphin County containing an established non-point source (agricultural) TMDL, shall be conducted in compliance with Chapter 102 (Erosion and Sediment Pollution Control), Chapter 91 - Section 91.36 (General Provisions related to Manure Management) and Act 38 (Nutrient Management).
- B. This section shall apply also to agricultural activities conducted in watersheds where TMDLs are established in the future

ARTICLE V - DESIGN CRITERIA

§ 247-17. Design Criteria for Stormwater Management & Drainage Facilities

A. General Design Guidelines:

1. Stormwater shall not be transferred from one watershed to another, unless (1) the watersheds are sub-watersheds of a common watershed which join together within the perimeter of the property; (2) the effect of the transfer does not alter the peak rate discharge onto adjacent lands; or (3) easements from the affected landowner(s) are provided.
2. Consideration shall be given to the relationship of the subject property to the drainage pattern of the watershed. A concentrated discharge of stormwater to an adjacent property shall be within an existing watercourse or confined in an easement or returned to a pre-development flow type condition.
3. Stormwater BMPs and recharge facilities are encouraged (e.g., rooftop storage, drywells, cisterns, recreation area ponding, diversion structures, porous pavements, holding tanks, infiltration systems, stream channel storage, in-line storage in storm sewers, and grading patterns). They shall be located, designed, and constructed in accordance with the latest technical guidance published by PADEP, provided they are accompanied by detailed engineering plans and performance capabilities and supporting site specific soils, geology, runoff and groundwater and infiltration rate data to verify proposed designs. Additional guidance from other sources may be accepted at the discretion of the Municipal Engineer (a pre-application meeting is suggested).
4. All existing and natural watercourses, channels, drainage systems and areas of surface water concentration shall be maintained in their existing condition unless an alteration is approved by the appropriate regulatory agency.
5. No outlet structure from a stormwater management facility, or swale, shall discharge directly onto a Municipal or State roadway.
6. The invert of all stormwater management facilities and underground infiltration/storage facilities shall be located a minimum of two (2) feet above the seasonal high groundwater table or other soil limiting zone. The invert of stormwater facilities may be lowered if adequate sub-surface drainage, which does not alter the existing water table level, is provided.
7. Any stormwater management facility having a maximum ponding depth of three (3) feet or more shall be fenced with a minimum four (4) foot high fence of material acceptable to the Municipality. Gates shall be self-closing and self-latching, and shall have a minimum opening of ten (10) feet.

8. Stormwater management facilities excavated to carbonate rock must either be fitted with an impervious clay liner, or over-excavated four (4) feet and refilled with a suitable material mix. Suitable backfill material is subject to the approval of the Municipal Engineer.
9. The type, location, and number of landscaping and planting specification shall be provided for all stormwater management facilities and be specific for each type of facility.

B. Stormwater Management Facilities:

1. All designs shall be consistent with the guidelines set forth in the BMP Manual unless otherwise stated herein.
2. Any stormwater management facility designed to store runoff and requiring a berm or earthen embankment, shall be designed to provide an emergency spillway to handle peak rate of stormwater runoff up to and including the 100- year post-development flow, with a blocked primary outlet structure. The height of embankment must be set as to provide a minimum one (1) foot of freeboard through the spillway, above the maximum water surface elevation. The primary outflow structure must be designed to pass all design storms (up to and including the 100-year event) without discharging through the emergency spillway. The maximum water depth within any stormwater management facility shall be no greater than six (6) feet when functioning through the primary outlet structure.
3. Emergency spillways shall be designed to prevent erosion during the 100-year post-development flow, with blocked primary outlet structure. Synthetic liners or rip-rap may be used, and calculations sufficient to support proposed design must be provided. Emergency spillway protection must extend up the sides of the spillway and continue at full width to a minimum of ten (10) feet past the toe of slope.
4. A stormwater management facility berm cross section must be at least five (5) feet wide at the top. For all embankments/berms, the side slopes shall be no steeper than 3:1
5. A cutoff and key trench of impervious material shall be provided under all embankments four (4) feet or greater in height.
6. Soils used for the construction of stormwater management facilities shall have low-erodibility factors ("K" factors) (refer to E&S Manual) and be identified on the SWM Site Plan.
7. Trash racks must be provided to prevent clogging of primary outflow structure for all orifices equivalent to twelve (12) inches or smaller in diameter.

8. Anti-seep collars must be provided on all outflow culverts in accordance with the methodology contained in the latest edition of the E&S Manual. An increase in seepage length of 15 percent must be used in accordance with the requirements for permanent anti-seep collars.
9. Conventional, non-BMP stormwater management facilities (i.e. dry detention basins) must empty over a period of time not less than 24 hours and not more than 72 hours from the end of the facility's inflow hydrograph. Infiltration tests performed at the facility locations and proposed basin bottom depths, in accordance with the BMP Manual, must support time-to-empty calculations if infiltration is a factor is the sizing of the stormwater management facility.
10. Impervious low-flow channels are not permitted within stormwater management facilities installed to meet water quality or groundwater recharge requirements. Facilities designed as water quality / infiltration BMPs may have a bottom slope of zero. Water storage below the lowest outlet structure stage (i.e. dead storage) is permitted in stormwater management facilities designed as water quality / infiltration BMPs. Low maintenance, saturation tolerant vegetation must be provided in basins designed as water quality / infiltration BMPs. Stormwater management facilities that are constructed to meet only rate control requirements must have a minimum slope of 1% extending radially out from the primary outlet structure.
11. Stormwater management facilities' bottom elevations must be greater than adjacent floodplain elevations. For the purpose of this provision, the floodplain is assumed to be fifty (50) feet from top of stream bank in areas where a floodplain is not designated or where no other evidence is provided.
12. Basin outflow culverts discharging into floodplains must account for tailwater. Tailwater corresponding to the 100-year floodplain elevation may be used for all design storms, or the Applicant may elect to determine flood elevations of the adjacent watercourse for each design storm. For the purpose of this provision, the floodplain is assumed to be fifty (50) feet from top of stream bank in areas where a floodplain is not designated or where no other evidence is provided.
13. All stormwater management facilities shall be set back at least 10 feet from property lines as measured from the nearest point of the BMP that may provide for water storage. For properties or complexes with multiple structures inhabited by separate parties, such as but not limited to residential condominiums or commercial shopping centers, stormwater management facilities shall be set back at least 25 feet from any structure.
14. Exceptions to these requirements may be made at the discretion of the Municipality for BMPs that retain or detain water but are of a much smaller scale than traditional stormwater management facilities.

C. Storm Sewer Facilities:

1. Storm sewers must be able to convey post-development runoff from a twenty-five (25) year design storm without surcharging inlets where appropriate. When connecting to an existing storm sewer system, the Applicant must demonstrate that the proposed system will not exacerbate any existing stormwater problems and that adequate downstream capacity exists.
2. A minimum pipe size of fifteen (15) inches in diameter shall be used in all roadway systems (public or private) proposed for construction. Pipes shall be designed to provide a minimum velocity of two and one-half (2 1/2) feet per second when flowing full, but in all cases, the slope shall be no less than 0.5%. Arch pipe of equivalent cross-sectional area may be substituted in lieu of circular pipe where cover or utility conflict conditions exist.
3. In proposed curbed roadway sections, the maximum encroachment of water on the roadway pavement shall not exceed one-half of the adjacent lane during the twenty-five (25) year design storm. Gutter flow depth shall be verified by inlet capture/capacity calculations that account for road slope and opening area and shall not exceed three (3) inches. The maximum distance between inlets in curbed roadway sections shall be no more than 600 feet.
4. At intersections and access driveways, the depth of flow across the through streets and across the access driveways (proposed and existing) shall not exceed one and one-half (1-1/2) inch for the ten (10) year design storm.
5. Standard Type "C" inlets with curb-matching hood heights shall be used along vertical concrete curbs roadway networks. Type "C" inlets that provide a 2" sump condition may be used with approval of the Municipal Engineer when roadway longitudinal slopes are 1.0% or less.
6. For inlets containing a change in pipe size, the elevation for the crown of the pipes shall be the same or the smaller pipe's crown shall be at a higher elevation.
7. All inlets shall provide a minimum 2" drop between the lowest inlet pipe invert elevation and the outlet pipe invert elevation.
8. On curbed sections, Type C inlets shall be placed on both sides of the street at the low point and longitudinally at an elevation 0.2 feet above the low point.
9. At all roadway low points, swales and easements shall be provided behind the curb or swale and through adjacent properties to channelize and direct any overflow of stormwater runoff away from dwellings and structures.
10. Inlets shall be placed so drainage cannot cross intersections or street centerlines.

11. All inlets in paved areas shall have heavy duty bicycle safe grating consistent with PennDOT Publication 72M. A note to this effect shall be added to the SWM Site Plan or inlet details therein.
12. Inlets must be sized to accept the specified pipe sizes without knocking out any of the inlet corners. All pipes entering or exiting inlets shall be cut flush with the inlet wall. A note to this effect shall be added to the SWM Site Plan or inlet details therein.
13. Inlets shall have weep holes covered with geotextile fabric placed at appropriate elevations to completely drain the sub grade prior to placing the base and surface course on roadways.
14. Inlets, junction boxes, or manholes greater than five (5) feet in depth shall be equipped with ladder rungs and shall be detailed on the SWM Site Plan.
15. Inlets shall not have a sump condition in the bottom (unless designed as a water quality BMP). Pipes shall be flush with the bottom of the box or concrete channels shall be poured.
16. Inlets, manholes, pipes, and culverts shall be constructed in accordance with the specifications set forth in PennDOT's Publication 408, latest edition, and as detailed in the PennDOT's Publication 72M - Standards for Roadway Construction (RC), latest edition, or as approved by the Municipal Engineer. All material and construction details (inlets, manholes, pipe trenches, etc.), must be shown on the SWM Site Plan, and a note added that all construction must be in accordance with PennDOT's Publication 408 and PennDOT's Publication 72M, latest edition. A note shall be added to the plan stating that all frames, concrete top units, and grade adjustment rings shall be set in a bed of full mortar according to Publication 408.
17. Accessible drainage structures shall be located on continuous storm sewer system at all vertical dislocations, at all locations where a transition in storm sewer pipe sizing is required, at all vertical and horizontal angle points exceeding five (5) degrees, and at all points of convergence of two (2) or more storm sewer pipes.
18. All storm drainage piping (equal to or greater than 12") discharging to the ground surface shall be provided with either reinforced concrete headwalls and end sections or plastic and metal pipe end sections compatible with the pipe size involved in accordance with PennDOT Publication 408 and Publication 72M.
19. Outlet protection shall be provided at all surface discharge points with storm drainage piping (equal to or greater than 12") in order to minimize erosion consistent with the E&S Manual.
20. Pavement base drain shall be provided at all low points in cut areas, toe of slope areas, and other areas as dictated by proven engineering principles and design judgment. All base drain shall be in accordance with PennDOT Publication 408.

D. Swale Conveyance Facilities:

1. Swales must be able to convey post-development runoff from a 25-year design storm with six (6) inches of freeboard to top of the swale.
2. Swales shall have side slopes no steeper than 3:1.
3. All swales shall be designed, labeled on the SWM Site Plan, and details provided to adequately construct and maintain the design dimension of the swales.
4. Swales shall be designed for stability using velocity or shear criteria. Velocity criteria may be used for channels with less than 10% slope. Shear criteria may be used for all swales. Documentation must be provided to support velocity and/or shear limitations used in calculations.
5. Where swale bends occur, the computed velocities or shear stresses shall be multiplied by the following factor for the purpose of designing swale erosion protection:
 - a. 1.75 – When swale bend is 30 to 60 degrees
 - b. 2.00 – When swale bend is 60 to 90 degrees
 - c. 2.50 – When swale bend is 90 degrees or greater
6. Swales must be designed for both temporary and permanent conditions in accordance with the latest E&S Manual.

§ 247-18. Calculation Methodology

- A. All calculations shall be consistent with the guidelines set forth in the BMP Manual. Stormwater runoff from all development sites shall be calculated using either the Rational Method or a Soil Cover Complex methodology. Methods shall be selected by the Qualified Professional based on the individual limitations and suitability of each method for a particular site.
- B. Infiltration, exfiltration, evapotranspiration, and/or any environmentally-dependent discharge rates are prohibited in the modeling of rate controls.
- C. Rainfall Values:
 1. Rational Method – The Pennsylvania Department of Transportation Drainage Manual, Intensity-Duration-Frequency Curves, Publication 584, Chapter 7A, latest edition, shall be used in conjunction with the appropriate time of concentration and return period.

2. Soil Cover Complex Method – The Soil Conservation Service Type II, 24-hour rainfall distribution shall be used in conjunction with rainfall depths from NOAA Atlas 14 or consistent with the following table.

Return Interval	24-hour Rainfall Total
(year)	(inches)
1	2.40
2	2.90
10	4.36
25	5.43
50	6.38
100	7.48

D. Peak Flow Rates:

1. Rational Method – May be used for drainage areas up to 20 acres. Extreme caution should be used by the Qualified Professional if the watershed has more than one main drainage channel, if the watershed is divided so that hydrologic properties are significantly different in one verse the other, if the time of concentration exceeds 60 minutes, or if stormwater runoff volume is an important factor. The combination of Rational Method hydrographs based on timing shall be prohibited.
 - a. The use of the Modified Rational Method to design stormwater management facilities must be approved by the Municipal Engineer.
2. Soil Cover Complex Method – May be used for drainage areas greater than 20 acres. This method is recommended for design of stormwater management facilities and where stormwater runoff volume must be taken into consideration.

E. For comparison of peak flow rates, flows shall be rounded to a tenth of a cubic foot per second (cfs).

F. Runoff Coefficients:

1. Rational Method – Use Table C-1 (Appendix C).
2. Soil Cover Complex Method – Use Table C-2 (Appendix C).
3. For the purposes of pre-development peak flow rate and volume determination, existing non-forested pervious areas conditions shall be considered as meadow (good condition).
4. For the purposes of pre-development peak flow rate and volume determination, twenty (20) percent of existing impervious area, when present on the project site, and contained within the new proposed limit of disturbance, shall be considered

meadow (good condition) for pre-development hydrologic calculations for re-development.

G. Design Storm:

1. All drainage facilities (inlets, pipes, and swales) shall be designed to safely convey the 25-year storm.
2. All stormwater management facilities shall be verified by routing the proposed 1-year, 2-year, 10-year, 25-year, 50-year, and 100-year hydrographs through the facility using the storage indication (Modified Puls) method. The design storm hydrograph shall be computed using a calculation method that produces a full hydrograph.
3. The stormwater management and drainage system shall be designed to safely convey the post-development 100-year storm event to stormwater detention facilities for the purpose of meeting peak rate control.
4. All structures (culvert or bridges) proposed to convey runoff under a Municipal road shall be designed to pass the 50-year design storm with a minimum one (1) foot of freeboard measured below the lowest point along the top of the roadway.
5. All design within State or Federal rights-of-way or that falls under the design criteria of any higher authority must meet the requirements of that agency in addition to meeting the minimum requirements of this Ordinance.

H. Time of Concentration:

1. Time of concentration shall be computed using the NRCS Segmental Method as described in TR-55 (SCS 1986 or most current update). The length of sheet flow shall be limited to 100-feet. The Manning's "n" Roughness Coefficient for TR-55 sheet flow can be found in Table C-4 (Appendix C). Time of concentration for channel and pipe flow shall be computed using Manning's equation.
2. For sites with insignificant channelized flow and less than 20% imperviousness coverage, the time of concentration may be computed using the NRCS equation for lagtime:

Time of Concentration = $T_c = [(T_{lag}/.6) * 60]$ (minutes)

$$T_{lag} = L^{0.3} \frac{(S+1)^{0.7}}{1900\sqrt{Y}}$$

Where:

T_{lag} = Lag time (hours)

L = Hydraulic length of watershed (feet)

Y = Average overland slope of watershed (percent)

S = Maximum retention in watershed as defined by: $S = [(1000/CN) - 10]$

CN = NRCS Curve Number for watershed as defined by the NRCS Loss Method

3. Additionally, the following provisions shall apply to calculations for time of concentration:
 - a. Supporting analysis is required for any instance in which the post-development time of concentration is greater than the pre-development time of concentration for any watershed or sub watershed.
 - b. The minimum time of concentration for any watershed shall be five (5) minutes.
 - c. The designer may choose to assume a five (5) minute time of concentration for any post-development watershed or sub watershed without providing any computations.
 - d. The designer must provide computations for all pre-development time of concentration paths. A five (5) minute time of concentration cannot be assumed for pre-development.
- I. Drainage areas tributary to sinkholes or closed depressions in areas underlain by limestone or carbonate geologic features shall be excluded from the modeled point of analysis defining pre-development flows. If left undisturbed during construction activities, areas draining to closed depressions may also be removed from peak runoff rates in the post-development analysis. New, additional contributing runoff shall not be directed to existing sinkholes or closed depressions.
- J. Where uniform flow is anticipated, the Manning's equation shall be used for hydraulic computations and to determine the capacity of open channels, pipes, and storm sewers. The Manning's equation should not be used for analysis of pipes under pressure flow or for analysis of culverts. Manning's "n" values shall be obtained from Table C-3 (Appendix C). Inlet control shall be checked at all inlet boxes to ensure the headwater depth during the ten (10) year design event is contained below the top of grate for each inlet box.
- K. The Municipality may approve the use of any generally accepted full hydrograph approximation technique that shall use a total runoff volume that is consistent with the volume from a method that produces a full hydrograph.

- L. The Municipality has the authority to require that computed existing runoff rates be reconciled with field observations, conditions, and site history. If the designer can substantiate, through actual physical calibration, that more appropriate runoff and time of concentration values should be utilized at a particular site, then appropriate variations may be made upon review and approval of the Municipality.

ARTICLE VI - SWM SITE PLAN & REPORT REQUIREMENTS

§ 247-19. General Requirements

For any of the activities regulated by this Ordinance and not eligible for the exemptions provided in Section 302, the final approval of subdivision and/or land development plans, the issuance of any building or occupancy permit, the issuance of a Major Stormwater Permit, or the commencement of any land disturbance activity, may not proceed until the Applicant has received written approval of a SWM Site Plan from the Municipality.

§ 247-20. SWM Site Plan & Report Contents

The SWM Site Plan & SWM Site Report shall consist of all applicable calculations, maps, and plans. All SWM Site Plan materials shall be submitted to the Municipality in a format that is clear, concise, legible, neat and well organized; otherwise, the SWM Site Plan shall be rejected.

Appropriate sections from Chapter 253, Subdivision and Land Development, of the Code of the Township of Swatara and other applicable local ordinances shall be followed in preparing the SWM site plan.

A. SWM Site Plan shall include (but not limited to):

1. Plans no larger than 24-inch x 36-inch sheets and in a form that meets the requirements for recording in the Office of the Recorder of Deeds of Dauphin County.
2. The name of the development; name and location address of the property site; name, address, and telephone number of the Applicant/Owner of the property; and name, address, telephone number, email address, and engineering seal of the individual preparing the SWM Site Plan.
3. The date of submission and dates of all revisions.
4. A graphical and written scale on all drawings and maps.
5. A north arrow on all drawings and maps.
6. A location map at a minimum scale of one (1) inch equals one-thousand (1,000) feet.
7. Metes and bounds description of the entire tract perimeter.
8. Existing and final contours at intervals of two (2) feet.
9. Existing waterbodies within the project area including streams, lakes, ponds,

field delineated wetlands or other bodies of water, sinkholes, flood hazard boundaries (FEMA delineated floodplains and floodways), areas of natural vegetation to be preserved, the total extent of the upstream area draining through the site, and overland drainage paths.

10. The location of all existing and proposed utilities, on-lot wastewater facilities, water supply wells, sanitary sewers, and water lines on and within fifty (50) feet of property lines.
11. A key map showing all existing man-made features beyond the property boundary that may be affected by the project.
12. Soil names and boundaries with identification of the Hydraulic Soil Group classification.
13. The proposed limit of disturbance line and associated proposed disturbed acres.
14. Proposed structures, roads, paved areas, and buildings, including plans and profiles of roads and paved areas and floor elevations of buildings.
15. Horizontal alignment, vertical profiles, and cross sections of all open channels, pipes, swales and other BMPs.
16. The location and clear identification of the nature of permanent stormwater BMPs.
17. The location of all erosion and sedimentation control facilities.
18. A minimum twenty (20) foot wide access easement around all stormwater management facilities that would provide ingress to and egress from a public right-of-way. In lieu of providing an easement to the public right-of-way, a note may be added to the plan granting the Municipality or their designees access to all easements via the nearest public right-of-way.
19. Construction details for all drainage and stormwater BMPs.
20. Construction details of any improvements made to sinkholes.
21. Identification of short-term and long-term ownership, operations, and maintenance responsibilities.
22. A list of required inspections to be completed by the Township Stormwater Engineer during construction.
23. Notes and Statements:

- a. A statement, signed by the landowner, acknowledging that the stormwater BMPs are fixtures that cannot be altered or removed without prior approval by the Municipality.
- b. A statement referencing the Operation and Maintenance (O&M) Agreement and stating that the O&M Agreement is part of the SWM Site Plan.
- c. A note indicating that Record Drawings will be provided for all stormwater management facilities prior to occupancy, or the release of financial security.
- d. The following signature block for the Qualified Professional preparing the SWM Site Plan:

“I, _____, hereby certify that this Stormwater Management Site Plan meets all design standards and criteria of the Swatara Township Stormwater Management Ordinance.”

B. SWM Site Report shall include (but not limited to):

1. The name of the development; name and location address of the property site; name, address, and telephone number of the Applicant/Owner of the property; and name, address, telephone number, email address, and engineering seal of the individual preparing the SWM Site Report.
2. Project description narrative including expected project time schedule.
3. Location map showing the project site and its location relative to release rate districts.
4. Drainage area maps for all watersheds and inlets depicting the time of concentration paths.
5. A detailed description of the existing site conditions. A detailed site evaluation shall be completed for projects proposed in areas of carbonate geology or karst topography, and other environmentally sensitive areas such as brownfields.
6. Complete hydrologic, hydraulic and structural computations, calculations, assumptions, and criteria for the design of all stormwater BMPs.
7. Description of, justification, and actual field results for infiltration testing with respect to the type of test and test location for the design of infiltration BMPs.
8. Calculations showing the total drainage area and impervious area loading rates to each BMP.

9. The effect of the project (in terms of runoff volumes, water quality, and peak flows) on surrounding properties and aquatic features and on any existing municipal stormwater collection system that may receive runoff from the project site.
 10. Description of the proposed changes to the land surface and vegetative cover including the type and amount of impervious area to be added.
 11. All applicable worksheets from Chapter 8 of the BMP Manual when establishing volume controls.
 12. Identification of short-term and long-term ownership, operation, and maintenance responsibilities as well as schedules and costs for inspection and maintenance activities for each permanent stormwater or drainage BMP, including provisions for permanent access or maintenance easements.
- C. Supplemental information to be provided prior to recording of the SWM Site Plan, as applicable:
1. Signed and executed Operations and Maintenance Agreement. The executed Operations and Maintenance agreement shall also be recorded along with the SWM site plan.
 2. Signed and executed easements, as required for all on-site and off-site work. The signed and executed easements shall also be recorded along with the SWM site plan.
 3. An Erosion and Sedimentation Control Plan & approval letter from the Dauphin County Conservation District.
 4. A NPDES Permit.
 5. Permits from PADEP and ACOE.
 6. A Geologic Assessment.
 7. A Wetland Delineation Report.
 8. A Highway Occupancy Permit from PennDOT when utilization of a PennDOT storm drainage system is proposed or when proposed facilities would encroach onto a PennDOT right-of-way.

§ 247-21. SWM Site Plan & Report Submission

- A. The Applicant shall submit the SWM Site Plan & Report for the Regulated Activity.

- B. Three (3) copies of the SWM Site Plan & Report shall be submitted to the Municipality and may be distributed as follows:
 - 1. Two (2) copies for the Municipality accompanied by the requisite Municipal Review Fee, as specified in this Ordinance
 - 2. One (1) copy for the Municipal Engineer
- C. Electronic copies of the SWM Site Plan & Report shall also be submitted to the Municipality.
- D. Additional copies shall be submitted as requested by the Municipality, Tri-County Regional Planning Commission, Dauphin County Conservation District or PADEP.

§ 247-22. SWM Site Plan & Report Review

- A. The Municipality shall require receipt of a complete SWM Site Plan & Report as specified in this Ordinance. The Municipality shall review the SWM Site Plan & Report for consistency with the purposes, requirements, and intent of this Ordinance.
- B. The Municipality shall not approve any SWM Site Plan & Report that is deficient in meeting the requirements of this Ordinance. At its sole discretion and in accordance with this Article, when a SWM Site Plan & Report is found to be deficient, the Municipality may disapprove the submission and require a resubmission, or in the case of minor deficiencies, the Municipality may accept submission of modifications.
- C. The Municipality shall notify the Applicant in writing within forty-five (45) calendar days whether the SWM Site Plan & Report is approved or disapproved if the SWM Site Plan & Report is not part of a Subdivision or Land Development Plan. If the SWM Site Plan & Report involves a Subdivision or Land Development Plan, the timing shall follow the Subdivision and Land Development process according to the Municipalities Planning Code.
- D. The Municipal Building Permit Office shall not issue a building permit for any Regulated Activity if the SWM Site Plan & Report has been found to be inconsistent with this Ordinance, as determined by the Municipality. All required permits from PADEP must be obtained prior to issuance of a building permit.

§ 247-23. Modification of Plans

- A. A modification to a submitted SWM Site Plan & Report for a development site that involves a change in stormwater management facilities or techniques, or that involves the relocation or re-design of stormwater management facilities, or that is necessary because soil or other conditions are not as stated on the SWM Site Plan as determined by the Municipality, shall require a resubmission of the modified SWM Site Plan in accordance with this Ordinance.

§ 247-24. Resubmission of Disapproved SWM Site Plan & Report

- A. A disapproved SWM Site Plan & Report may be resubmitted with the revisions addressing the Municipality's concerns documented in writing, to the Municipality in accordance with this Ordinance. The applicable Municipal Review Fee must accompany a resubmission of a disapproved SWM Site Plan & Report.

§ 247-25. Authorization to Construct and Term of Validity

- A. The Municipality's approval of a SWM Site Plan & Report or Minor Stormwater Permit authorizes the Regulated Activities contained in the SWM Site Plan or Minor Stormwater Permit application for a maximum term of validity of five (5) years following the date of approval. The Municipality may specify a term of validity shorter than five (5) years in the approval for any specific SWM Site Plan. Terms of validity shall commence on the date the Municipality signs the approval for a SWM Site Plan. If stormwater management facilities included in the approved SWM Site Plan have not been constructed, or if a Record Drawing of these facilities has not been approved within this time, then the Municipality may consider the SWM Site Plan disapproved and may revoke any and all permits or approvals.

§ 247-26. As-Built Plans, Completion Certificate, Final Inspection

- A. The Applicant shall be responsible for providing as-built plans of all SWM BMPs included in the approved SWM Site Plan. The as-built plans and an explanation of any discrepancies with the construction plans shall be submitted to the Municipality.
- B. The as-built submission shall include a certification of completion signed by a qualified professional verifying that all permanent SWM BMPs have been constructed according to the approved plans and specifications.
- C. The applicant shall demonstrate that all required inspections by the municipal engineer have been completed and the items inspected were found to be satisfactory. Required inspections by the municipal engineer shall be per the schedule of required inspections described in section 602 for Major Stormwater Permits, or in accordance with Appendix D for Minor Stormwater Permits.
- D. The latitude and longitude coordinates for all permanent SWM BMPs must also be submitted at the central location of the BMPs. If any licensed qualified professionals contributed to the construction plans, then a licensed qualified professional must sign the completion certificate.
- E. After receipt of the completion certification by the Municipality, the Municipality may conduct a final inspection.

ARTICLE VII -EASEMENTS

§ 247-27. Easements

- A. Easements shall be established to accommodate the existence of drainageways.
- B. Easements shall be established for all on-site stormwater management or drainage facilities, including but not limited to: detention facilities (above or below ground), infiltration facilities, all stormwater BMPs, drainage swales, and drainage facilities (inlets, manholes, pipes, etc.).
- C. Easements are required for all areas used for off-site stormwater control.
- D. All easements shall be a minimum of twenty (20) feet wide.
- E. Easements shall provide ingress to and egress from a public right-of-way. In lieu of providing an easement to the public right-of-way, a note may be added to the plan granting the Municipality or their designees access to all easements via the nearest public right-of-way.
- F. Where possible, easements shall be centered on side and/or rear lot lines.
- G. The following note shall be placed on the recorded plan, "Nothing shall be placed, stored, erected, constructed over, or otherwise located within a stormwater easement other than the SWM facilities within the easement."
- H. A note shall be placed on the SWM Site Plan identifying the party responsible for assuring the continued functionality and required maintenance of any easement.

ARTICLE VIII - MAINTENANCE RESPONSIBILITIES

§ 247-28. Financial Security

- A. For both Minor and Major Stormwater Permits, the Applicant shall provide a Financial Security to the Municipality for the timely installation and proper construction of all stormwater management controls as required by the approved SWM Site Plan and this Ordinance, equal to 110% of the full construction cost of the required controls in accordance with the Municipalities Planning Code.
- B. For Minor Stormwater Permits, the required amount of financial security may be calculated as described Appendix D for the applicable BMP types. For Major Stormwater permits, or for BMP types other than the ones described in Appendix B, the applicant shall submit an itemized cost estimate for the stormwater improvements based on the quantities and installed unit cost of each material used in construction of the subject facilities.
- C. At the completion of the project and as a prerequisite for the release of the Financial Security, the Applicant shall:
 - 1. Provide a certification of completion from an engineer, architect, surveyor or other qualified professional, verifying that all permanent facilities have been constructed according to the SWM Site Plan & Report and approved revisions thereto.
 - 2. The applicant shall demonstrate that all required inspections by the municipal engineer have been completed and the items inspected were found to be satisfactory. Required inspections by the municipal engineer shall be per the schedule of required inspections described in section 602 for Major Stormwater Permits, or in accordance with Appendix D for Minor Stormwater Permits.
 - 3. Provide a set of Record Drawings.
 - 4. Request a final inspection from the Municipality to certify compliance with this Ordinance, after receipt of the certification of completion and Record Drawings by the Municipality.

§ 247-29. Maintenance Responsibilities

- A. For a Major Stormwater Permit, the SWM Site Plan & Report for the project site shall describe the future operation and maintenance responsibilities. The operation and maintenance description shall outline required routine maintenance actions and schedules necessary to ensure proper operation of the stormwater control facilities. For a Minor Stormwater Permit, the operation and maintenance responsibilities shall be as described in Appendix D for the applicable BMPs. In the event that the applicant does not wish to use one of the prescribed BMPs from Appendix D for a project involving a Minor Stormwater Permit, the operation and maintenance responsibilities

and agreement shall be as required for a Major Stormwater permit.

- B. For a Major Stormwater Permit, the SWM Site Plan & Report for the project site shall establish responsibilities for the continuing operation and maintenance of all proposed stormwater control facilities, consistent with the following principals:
1. If a development consists of structures or lots that are to be separately owned and in which streets, sewers, and other public improvements are to be dedicated to the Municipality, stormwater control facilities/BMPs may also be dedicated to and maintained by the Municipality.
 2. If a development site is to be maintained in a single ownership or if sewers and other public improvements are to be privately owned and maintained, then the ownership and maintenance of stormwater control facilities/BMPs shall be the responsibility of the owner or private management entity.
 3. Facilities, areas, or structures used as stormwater BMPs shall be enumerated as permanent real estate appurtenances and recorded as deed restrictions or easements that run with the land.
 4. The SWM Site Plan & Operation and Maintenance (O&M) Agreement shall be recorded as a restrictive deed covenant that runs with the land.
 5. The Municipality may take enforcement actions against an Applicant for failure to satisfy any provision of this Ordinance.
- C. The Municipality, upon recommendation of the Municipal Engineer, shall make the final determination on the continuing maintenance responsibilities prior to final approval of the SWM Site Plan & Report. The Municipality may require a dedication of such facilities as part of the requirements for approval of the SWM Site Plan. Such a requirement is not an indication that the Municipality will accept the facilities. The Municipality reserves the right to accept or reject the ownership and operating responsibility for any portion of the stormwater management controls.
- D. If the Municipality accepts ownership of stormwater BMPs, the Municipality may, at its discretion, require a fee from the Applicant to the Municipality to offset the future cost of inspections, operations, and maintenance.
- E. It shall be unlawful to alter or remove any permanent stormwater BMP required by an approved SWM Site Plan, or to allow the property to remain in a condition, which does not conform to an approved SWM Site Plan, unless the Municipality grants an exception in writing.

§ 247-30. Maintenance Agreement for Privately Owned Stormwater Facilities

- A. Prior to final approval of the SWM Site Plan & Report, the Applicant shall sign the

Operation and Maintenance (O&M) Agreement (Appendix A) covering all stormwater control facilities that are to be privately owned. The Operation and Maintenance (O&M) Agreement shall be recorded with the SWM Site Plan and made a part hereto.

- B. Other items may be included in the Operation and Maintenance (O&M) Agreement where determined necessary to guarantee the satisfactory operation and maintenance of all BMP facilities. The Operation and Maintenance (O&M) Agreement shall be subject to the review and approval of the Municipality and the Municipal Solicitor.
- C. The owner is responsible for operation and maintenance of the stormwater BMPs. If the owner fails to adhere to the Operation and Maintenance (O&M) Agreement, the Municipality may perform the services required and charge the owner appropriate fees. Non-payment of fees may result in a lien against the property.

ARTICLE IX -INSPECTIONS

§ 247-31. Schedule of Inspections

- A. PADEP or its designees normally ensure compliance with any permits issued, including those for stormwater management. In addition to PADEP compliance programs, the Municipality or their municipal assignee may inspect all phases of the installation of temporary or permanent stormwater management facilities.
- B. During any stage of Earth Disturbance Activities, if the Municipality determines that the temporary or permanent stormwater management facilities are not being installed in accordance with the approved SWM Site Plan, the Municipality shall revoke any existing permits or approvals until a revised SWM Site Plan is submitted and approved as specified in this Ordinance.
- C. Stormwater BMPs shall be inspected by the landowner, or the landowner's designee according to the inspection schedule described on the SWM Site Plan for each BMP included as part of a major stormwater permit.
 - 1. The Municipality may require copies of the inspection reports, in a form as stipulated by the Municipality.
 - 2. If such inspections are not conducted or inspection reports not submitted as scheduled, the Municipality, or their designee, may conduct such inspections and charge the owner appropriate fees. Non-payment of fees may result in a lien against the property.
 - a. Prior to conducting such inspections, the Municipality shall inform the owner of its intent to conduct such inspections. The owner shall be given thirty (30) days to conduct required inspections and submit the required inspection reports to the Municipality.
- D. Stormwater BMPs shall be inspected by the Municipality, or the Municipality's designee according to the inspection schedule described on the Site Design Worksheets and Sketch Plan (Appendix D) for each BMP included as part of a minor stormwater permit.

§ 247-32. Right-of-Entry

- A. Upon presentation of proper credentials, duly authorized representatives of the Municipality may enter at reasonable times, upon any property within the Municipality, to inspect the implementation, condition, or operations and maintenance of the stormwater BMPs in regard to any aspect governed by this Ordinance.
- B. Stormwater BMP owners and operators shall allow persons working on behalf of the Municipality ready access to all parts of the premises for the purposes of determining

compliance with this Ordinance.

- C. Persons working on behalf of the Municipality shall have the right to temporarily locate on any stormwater BMP in the Municipality such devices, as are necessary, to conduct monitoring and/or sampling of the discharges from such stormwater BMP
- D. Unreasonable delay in allowing the Municipality access to a stormwater BMP is a violation of this Ordinance.

ARTICLE X - ENFORCEMENT AND PENALTIES

§ 247-33. Notification

- A. In the event that a person fails to comply with the requirements of this Ordinance, an approved SWM Site Plan, or fails to conform to the requirements of any permit or approval issued hereunder, the Municipality shall provide written notification, via certified mail, of the violation to the Landowner indicated on the O&M Agreement. Such notification shall set forth the nature of the violation(s) and establish a time limit for correction of these violation(s).
- B. Failure to comply within the time specified shall subject such person to the penalties provisions of this Ordinance. All such penalties shall be deemed cumulative and shall not prevent the Municipality from pursuing any and all other remedies. It shall be the responsibility of the owner of the real property on which any Regulated Activity is proposed to occur, is occurring, or has occurred, to comply with the terms and conditions of this Ordinance.

§ 247-34. Enforcement

- A. The municipal governing body is hereby authorized and directed to enforce all of the provisions of this Ordinance. The approved SWM Site Plan shall be on file at the project site throughout the duration of the construction activity. The Municipality or their designee may make periodic inspections during construction.
- B. Adherence to Approved SWM Site Plan:
 - 1. It shall be unlawful for any person, firm, or corporation to undertake any Regulated Activity on any property except as provided for by an approved SWM Site Plan and pursuant to the requirements of this Ordinance.
 - 2. It shall be unlawful to alter or remove any control structure required by the SWM Site Plan pursuant to this Ordinance.
 - 3. It shall be unlawful to allow a property to remain in a condition that does not conform to an approved SWM Site Plan.

§ 247-35. Public Nuisance

- A. A violation of any provision of this Ordinance is hereby deemed a Public Nuisance.
- B. Each day that a violation continues shall constitute a separate violation.

§ 247-36. Suspension and Revocation

- A. Any approval or permit issued by the Municipality may be suspended or revoked for:

1. Non-compliance with or failure to implement any provision of the approved SWM Site Plan or Operation and Maintenance (O&M) Agreement.
 2. A violation of any provision of this Ordinance or any other applicable law, Ordinance, rule or regulation relating to the Regulated Activity.
 3. The creation of any condition or the commission of any act, during the Regulated Activity which constitutes or creates a hazard or nuisance, pollution, or which endangers the life or property of others.
- B. A suspended approval or permit may be reinstated by the Municipality when:
1. The Municipality or their designee has inspected and approved the corrections to the violation(s) that caused the suspension.
 2. The Municipality is satisfied that the violation(s) has been corrected.
- C. An approval that has been revoked by the Municipality cannot be reinstated. The Applicant may apply for a new approval under the provisions of this Ordinance.
- D. If a violation causes no immediate danger to life, public health, or property, at its sole discretion, the Municipality may provide a limited time period for the owner to correct the violation. In these cases, the Municipality will provide the owner, or the owner's designee, with a written notice of the violation and the time period allowed for the owner to correct the violation. If the owner does not correct the violation within the allowed time period, the municipality may revoke or suspend any, or all, applicable approvals and permits pertaining to any provision of this Ordinance.

§ 247-37. Penalties

A. Civil Judgment; Monetary.

1. Any person, partnership or corporation who or which has violated or permitted the violation of the provisions of this chapter shall, upon being found liable therefor in a civil enforcement proceeding commenced by the Township, pay a judgment of not more than \$600, plus all court costs, including reasonable attorney fees incurred by the Township as a result thereof. No judgment shall commence or be imposed, levied or payable until the date of the determination of a violation by the Magisterial District Judge. If the defendant neither pays nor timely appeals the judgment, the Township may enforce the judgment pursuant to the applicable rules of civil procedure. Each day that a violation continues shall constitute a separate violation, unless the Magisterial District Judge determining that there has been a violation further determines that there was a good faith basis for the person, partnership or corporation violating this chapter to have believed that there was no such violation, in which event there shall be

deemed to have been only one such violation until the fifth day following the date of determination of a violation by the Magisterial District Judge, and, thereafter, each day that a violation continues shall constitute a separate violation.

2. The Court of Common Pleas, upon petition, may grant an order of stay, upon cause shown, tolling the per diem fine pending a final adjudication of the violation and judgment.
3. Nothing contained in this section shall be construed or interpreted to grant to any person or entity other than the Township the right to commence any action for enforcement pursuant to this section.
4. Magisterial District Judges shall have initial jurisdiction over proceedings brought under this subsection.

B. Civil Judgment: Suits to Restrain, Prevent or Abate Violations.

1. Any activity conducted in violation of the provisions of this chapter, as applied to the Township, is hereby declared a public nuisance.
2. The Township, at its option, may institute suits in equity or at law to restrain, prevent or abate violations of this chapter affecting the Township. Except in cases of emergency, where, in the opinion of the Court of Common Pleas, the circumstances of the case require immediate abatement of the unlawful conduct, the Court may, in its decree, fix a reasonable time during which the person responsible for the unlawful conduct shall correct or abate the same. The expense of such proceedings shall be recoverable from the violator as part of the Court's order or in any action in assumpsit or in the same manner as a municipal claim is recovered.

§ 247-38. Appeals

- A. Any person aggrieved by any action of the Municipality or its designee, relevant to the provisions of this Ordinance, may appeal to the Capital Area Council of Governments Uniform Construction Code Joint Appeals Board within thirty (30) days of that action.
- B. Any person aggrieved by any decision of the Municipality, relevant to the provisions of this Ordinance, may appeal to the Dauphin County Court of Common Pleas within thirty (30) days of the Municipality's decision.

ARTICLE XI -PROHIBITIONS

§ 247-39. Prohibited Discharges and Connections

- A. Any drain or conveyance, whether on the surface or subsurface, that allows any non-stormwater discharge including sewage, process wastewater, and wash water to enter a regulated small MS4 or to enter the surface waters of this Commonwealth is prohibited.
- B. No person shall allow, or cause to allow, discharges into a regulated small MS4, or discharges into waters of this Commonwealth, which are not composed entirely of stormwater, except (1) as provided in paragraph C below and (2) discharges authorized under a state or federal permit.
- C. The following discharges are authorized unless they are determined to be significant contributors to pollution a regulated small MS4 or to the waters of this Commonwealth:
1. Discharges or flows from firefighting activities.
 2. Discharges from potable water sources including water line flushing and fire hydrant flushing, if such discharges do not contain detectable concentrations of Total Residual Chlorine (TRC).
 3. Non-contaminated irrigation water, water from lawn maintenance, landscape drainage and flows from riparian habitats and wetlands.
 4. Diverted stream flows and springs.
 5. Water from crawl space pumps.
 6. Pavement wash waters where spills or leaks of toxic or hazardous materials have not occurred (unless all spill material has been removed) and where detergents are not used.
 7. Non-contaminated pumped ground water and water from foundation and footing drains and crawl space pumps.
 8. Uncontaminated water from foundations or from footing drains.
 9. Non-contaminated HVAC condensation and water from geothermal systems.
 10. Residential (i.e., not commercial) vehicle wash water where cleaning agents are not utilized.
 12. Non-contaminated hydrostatic test water discharges, if such discharges do not contain detectable concentrations of TRC.

- D. In the event that the municipality or DEP determines that any of the discharges identified in Subsection C significantly contribute pollutants to a regulated small MS4 or to the waters of this Commonwealth, the municipality or DEP will notify the responsible person(s) to cease the discharge.
- E. In the event that the municipality or PADEP determines that any of the discharges identified in Subsection D significantly contribute to pollution of waters of the commonwealth, or is so notified by PADEP, the municipality will notify the responsible person(s) to cease the discharge.
- F. Upon notice provided by the municipality or PADEP under Subsection E, the discharger will have a reasonable time, as determined by the municipality or PADEP, to cease the discharge, consistent with the degree of pollution caused by the discharge.
- G. Nothing in this section shall affect a discharger's responsibilities under commonwealth law.

§ 247-40. Roof Drains

- A. Roof drains and sump pumps shall discharge to infiltration or vegetative BMPs wherever feasible.

§ 247-41. Alteration of BMPs

- A. No person shall modify, remove, fill, landscape, or alter any existing stormwater BMP, facilities, areas, or structures unless it is part of an approved maintenance program, without the written approval of the Municipality.

ARTICLE XII - FEES AND EXPENSES

§ 247-42. General

- A. The fee required by this Ordinance is the Municipal Review Fee. The Municipal Review Fee shall be established by the Municipality to defray review costs incurred by the Municipality and the Municipal Engineer. The Applicant shall pay all fees.

§ 247-43. Expenses Covered by Fees

- A. The fees required by this Ordinance shall, at a minimum, cover:
1. Administrative and Clerical Costs.
 2. Review of the SWM Site Plan & Report by the Municipality.
 3. Pre-construction meetings.
 4. Inspection of stormwater management facilities/BMPs and drainage improvements during construction.
 5. Final inspection upon completion of the stormwater management facilities/BMPs and drainage improvements presented in the SWM Site Plan.
 6. Any additional work required to enforce any permit provisions regulated by this Ordinance, correct violations, and assure proper completion of stipulated remedial actions.

§ 247-44. Recording of Approved SWM Site Plan and Related Agreements

- A. The owner of any land upon which permanent BMPs will be placed, constructed, or implemented, as described in the SWM Site Plan, shall coordinate with the Township to record the following documents in the Office of the Recorder of Deeds of Dauphin County, within 45 days of approval of the SWM Site Plan by the Municipality:
1. The SWM Site Plan.
 2. Operations and Maintenance (O&M) Agreement.
 3. Easements under Section 701.
- B. The Municipality may suspend or revoke any approvals granted for the project site upon discovery of the failure of the owner to comply with this Section.

§ 247-45. Construal of Provisions

A. Nothing contained in this Ordinance shall be construed to affect any suit or proceeding in any court, or any rights acquired, or liability incurred, or any cause of action existing prior to the enactment of this Ordinance.


SECTION 2. Severability. If any sentence, clause, section, or part of this Ordinance is for any reason found to be unconstitutional, illegal, or invalid, such unconstitutionality, illegality or invalidity shall not affect or impair any of the remaining provisions, sentences, clauses, sections, or parts of this Ordinance. It is hereby declared as the intent of Swatara Township that this Ordinance would have been adopted had such unconstitutional, illegal, or invalid sentence, clause, section, or part thereof not been included herein.

SECTION 3. Repealer. All ordinances or parts of ordinances which are inconsistent hereof are hereby repealed.


SECTION 4. Effective Date: This Ordinance shall become effective immediately upon its adoption.

ADOPTED this 7th day of September 2022.

ATTEST:



Secretary
(Seal)



Christine Zubeck, President
Swatara Township Board of Commissioners

APPENDIX A - OPERATION AND MAINTENANCE
AGREEMENT

Tax Parcel ID # _____

OPERATION AND MAINTENANCE AGREEMENT
STORMWATER FACILITIES AND BEST MANAGEMENT PRACTICES OPERATIONS AND
MAINTENANCE AGREEMENT

THIS AGREEMENT, made and entered into this _____ day of _____, 20____, by and between _____, (hereinafter the "Landowner"), and Swatara Township, Dauphin County, Pennsylvania (hereinafter "Municipality");

WITNESSETH:

WHEREAS, the Landowner is the owner of certain real property, as recorded by deed in the land records of Dauphin County, Pennsylvania, Deed Book _____ at Page _____ or Instrument Number _____ (hereinafter "Property"), designated as Parcel ID No. _____; and

WHEREAS, the Landowner is proceeding to build and develop the Property; and,

WHEREAS, the Stormwater Management Plan (hereinafter "Plan") for the property identified herein, as approved or to be approved by the Municipality, provides for management of stormwater within the confines of the Property though the use of Best Management Practices (BMP's); and,

WHEREAS, the Municipality and the Landowner, his successors and assigns agree that the health, safety and welfare of the residents of the Municipality and the protection and maintenance of water quality require that on-site stormwater Best Management Practices be constructed and maintained on the Property; and,

WHEREAS, the Municipality requires, through the implementation of the Stormwater Management Plan, that stormwater management BMP's, as required by said Stormwater Management Plan, and the Municipal Stormwater Management and Flood Reduction Ordinance, be constructed and adequately maintained by the Landowner, his successors and assigns.

NOW, THEREFORE, in consideration of the foregoing promises, the mutual covenants contained herein, and the following terms and conditions, the parties hereto agree as follows:

1. The onsite BMP facilities shall be constructed by the Landowner in accordance with the plans and specifications identified in the Plan.
2. The Landowner shall maintain the BMP(s) as shown on the Plan in good working order acceptable to the Municipality and in accordance with the specific maintenance requirements noted on the Plan.
3. The Landowner hereby grants permission to the Municipality, its authorized agents and employees, to enter upon the property, at reasonable times and upon presentation of proper identification, to inspect the BMP(s) whenever it deems

necessary. Whenever possible, the Municipality shall notify the Landowner prior to entering the property.

4. In the event the Landowner fails to operate and maintain the BMP(s), as shown on the Plan, in good working order acceptable to the Municipality, the Municipality or its representatives may enter upon the Property and take whatever action is deemed necessary to maintain said BMP(s). This provision shall not be construed to allow the Municipality to erect any permanent structure on the land of the Landowner. It is expressly understood and agreed that the Municipality is under no obligation to maintain or repair said facilities, and in no event shall this Agreement be construed to impose any such obligation on the Municipality.
5. In the event the Municipality, pursuant to this Agreement, performs work of any nature, or expends any funds in performance of said work for labor, use of equipment, supplies, materials, and the like, the Landowner shall reimburse the Municipality for all expenses (direct or indirect) incurred within 10 days of receipt of invoice from the Municipality.
6. The intent and purpose of this Agreement is to insure the proper maintenance of the onsite BMP(s) by the Landowner; provided, however, that this Agreement shall not be deemed to create or effect any additional liability of any party for damage alleged to result from or be caused by stormwater runoff.
7. The Landowner, its executors, administrators, assigns, and other successors in interest, shall indemnify the Municipality's employees and designated representatives against all damages, accidents, casualties, occurrences or claims which might arise or be asserted against said employees and representatives from the construction, presence, existence, or maintenance of the BMP(s) by the Landowner or Municipality. In the event that a claim is asserted against the Municipality, its designated representatives or employees, the Municipality shall promptly notify the Landowner and the Landowner shall defend, at his own expense, any suit based on the claim. If any judgment or claims against the Municipality's employees or designated representatives shall be allowed, the Landowner shall pay all cost and expenses regarding said judgment or claim.
8. Landowner shall establish with the Township a BMP escrow account in the amount of _____ Dollars (\$ _____), as determined by the Township engineer. The BMP inspection fee escrow account shall be used to pay for all review and inspection fees incurred by the Township. Any funds remaining in the BMP escrow account shall be returned to the Landowner upon the Township engineer's certification that the onsite BMP facilities were constructed by the Landowner in accordance with the plans and specifications identified in the Plan.
9. This Agreement shall be recorded among the land records of Dauphin County, Pennsylvania, and shall constitute a covenant running with the Property and/or equitable servitude, and shall be binding on the Landowner, his administrators, executors, assigns, heirs, and any other successors in interests, in perpetuity.

ATTEST:

WITNESS the following signatures and seals:

(SEAL)

For the Municipality:

COMMONWEALTH OF PENNSYLVANIA :
: SS:
COUNTY OF DAUPHIN :

On this the _____ day of _____, 20____, before me,
_____, a Notary Public, the undersigned officer, personally appeared
_____, known to be (or satisfactorily proven to be) the
person(s) named herein and who executed the foregoing, and acknowledged that he/she/they
executed the same for the purposes therein contained.

Notary Public

(SEAL)

For the Landowner:

COMMONWEALTH OF PENNSYLVANIA :
: SS:
COUNTY OF DAUPHIN :

On this the _____ day of _____, 20____, before me,
_____, a Notary Public, the undersigned officer, personally appeared
_____, known to be (or satisfactorily proven to be) the
person(s) named herein and who executed the foregoing, and acknowledged that he/she/they
executed the same for the purposes therein contained.

Notary Public

(SEAL)

For the Landowner:

COMMONWEALTH OF PENNSYLVANIA

:

COUNTY OF DAUPHIN

: **SS:**

:

On this the _____ day of _____, 20____, before me, _____, a Notary Public, the undersigned officer, personally appeared _____, known to be (or satisfactorily proven to be) the person(s) named herein and who executed the foregoing, and acknowledged that he/she/they executed the same for the purposes therein contained.

Notary Public

(SEAL)

APPENDIX B - LOW IMPACT DEVELOPMENT PRACTICES

Alternative Approaches for Managing Stormwater Runoff

Natural hydrologic conditions may be altered radically by poorly planned development practices, such as introducing unneeded impervious surfaces, destroying existing drainage swales, constructing unnecessary storm sewers, and changing local topography. A traditional drainage approach of development has been to remove runoff from a site as quickly as possible and capture it in a detention basin. This approach leads ultimately to the degradation of water quality, as well as expenditure of additional resources for detaining and managing concentrated runoff at some downstream location.

The recommended alternative approach is to promote practices that will minimize post-development runoff rates and volumes, which will minimize needs for artificial conveyance and storage facilities. To simulate pre-development hydrologic conditions, forced infiltration is often necessary to offset the loss of infiltration by creation of impervious surfaces. The ability of the ground to infiltrate runoff depends upon the soil types and its conditions.

Preserving natural hydrologic conditions requires careful alternative site design considerations. Site design practices include preserving natural drainage features, minimizing impervious surface area, reducing the hydraulic connectivity of impervious surfaces, and protecting natural depression storage. A well-designed site will contain a mix of all those features. The following describes various techniques to achieve the alternative approaches:

- ◆ **Preserving Natural Drainage Features.** Protecting natural drainage features, particularly vegetated drainage swales and channels, is desirable because of their ability to infiltrate and attenuate flows and to filter pollutants. However, this objective is often not accomplished in land development. In fact, commonly held drainage philosophy encourages just the opposite pattern - streets and adjacent storm sewers typically are located in the natural headwater valleys and swales, thereby replacing natural drainage functions with a completely impervious system. As a result, runoff and pollutants generated from impervious surfaces flow directly into storm sewers with no opportunity for attenuation, infiltration, or filtration. Developments designed to fit site topography also minimize the amount of grading on site.
- ◆ **Protecting Natural Depression Storage Areas.** Depressional storage areas have no surface outlet or drain very slowly following a storm event. They can be commonly seen as ponded areas in farm fields during the wet season or after large runoff events. Traditional development practices eliminate these depressions by filling or draining, thereby obliterating their ability to reduce surface runoff volumes and trap pollutants. The volume and release-rate characteristics of depressions should be protected in the design of the development site. The depressions can be protected by simply avoiding the depression or by incorporating its storage as additional capacity in required detention facilities.
- ◆ **Avoiding Introduction of Impervious Areas.** Careful site planning should consider reducing impervious coverage to the maximum extent possible. Building footprints, sidewalks, driveways, and other features producing impervious surfaces should be evaluated to minimize impacts on runoff.
- ◆ **Reducing the Hydraulic Connectivity of Impervious Surfaces.** Impervious surfaces are significantly less of a problem if they are not directly connected to an impervious

conveyance system (such as storm sewer). Two basic ways to reduce hydraulic connectivity are: routing of roof runoff over lawns; and reducing the use of storm sewers. Site grading should promote increasing travel time of stormwater runoff and should help reduce concentration of runoff to a single point in the development.

- ◆ **Routing Roof Runoff Over Lawns.** Roof runoff can be easily routed over lawns in most site designs. The practice discourages direct connections of downspouts to storm sewers or parking lots. The practice also discourages sloping driveways and parking lots to the street. The routing of roof drains and crowning the driveway to allow runoff to discharge to pervious areas is desirable as the pervious area essentially acts as a filter strip.
- ◆ **Reducing the Use of Storm Sewers.** By reducing the use of storm sewers for draining streets, parking lots, and backyards, the potential for accelerating runoff from the development can be greatly reduced. The practice requires greater use of swales and may not be practical for some development sites, especially if there are concerns for areas that do not drain in a “reasonable” time. The practice requires educating local citizens and public works officials, who expect runoff to disappear shortly after a rainfall event.
- ◆ **Reducing Street Widths.** Street widths can be reduced by either eliminating on street parking or by reducing cartway widths. Municipal planners and traffic designers should encourage narrower neighborhood streets, which ultimately could lower maintenance and maintenance related costs.
- ◆ **Limiting Sidewalks to One Side of the Street.** A sidewalk on one side of the street may suffice in low-traffic neighborhoods. The lost sidewalk could be replaced with bicycle/recreational trails that follow back-of-lot lines. Where appropriate, backyard trails should be constructed using pervious materials.
- ◆ **Using Permeable Paving Materials.** These materials include permeable interlocking concrete paving blocks or porous bituminous concrete. Such materials should be considered as alternatives to conventional pavement surfaces, especially for low use surfaces such as driveways, overflow parking lots, and emergency access roads.
- ◆ **Reducing Building Setbacks.** Reducing building setbacks reduces driveway and entry walks and is most readily accomplished along low-traffic streets where traffic noise is not a problem.
- ◆ **Constructing Cluster Developments.** Cluster developments can also reduce the amount of impervious area for a given number of lots. The biggest savings is in street length, which also will reduce costs of the development. Cluster development “clusters” the construction activity onto less-sensitive areas without substantially affecting the gross density of development.

In summary, careful consideration of the existing topography and implementation of a combination of the above-mentioned techniques may avoid construction of costly stormwater control measures. Other benefits include: reduced potential of downstream flooding, reduced water quality degradation of receiving streams and water bodies, enhancement of aesthetics, and reduction of development costs. Beneficial results include: more stable baseflows in receiving streams, improved groundwater recharge, reduced flood flows, reduced pollutant loads, and reduced costs for conveyance and storage.

STORMWATER MANAGEMENT

247 Attachment 3

Township of Swatara

Appendix C: Stormwater Management Design Criteria

Table C-1: Rational Method Runoff Coefficients
Hydrologic Soil Group and Slope Range

Land Use	A			B			C			D		
	0% to 2%	2% to 6%	6% +	0% to 2%	2% to 6%	6% +	0% to 2%	2% to 6%	6% +	0% to 2%	2% to 6%	6% +
Cultivated land	0.08 ^a 0.14 ^b	0.13 0.18	0.16 0.22	0.11 0.16	0.15 0.21	0.21 0.28	0.14 0.20	0.19 0.25	0.26 0.34	0.18 0.24	0.23 0.29	0.31 0.41
Pasture	0.12 0.15	0.20 0.25	0.30 0.37	0.18 0.23	0.28 0.34	0.37 0.45	0.24 0.30	0.34 0.42	0.44 0.52	0.30 0.37	0.40 0.50	0.50 0.62
Meadow	0.10 0.14	0.16 0.22	0.25 0.30	0.14 0.20	0.22 0.28	0.30 0.37	0.20 0.26	0.28 0.35	0.36 0.44	0.24 0.30	0.30 0.40	0.40 0.50
Forest	0.05 0.08	0.08 0.11	0.11 0.14	0.08 0.10	0.11 0.14	0.14 0.18	0.10 0.12	0.13 0.16	0.16 0.20	0.12 0.15	0.16 0.20	0.20 0.25
Residential (1/8 acre)	0.25 0.33	0.28 0.37	0.31 0.40	0.27 0.35	0.30 0.39	0.35 0.44	0.30 0.38	0.33 0.42	0.38 0.49	0.33 0.41	0.36 0.45	0.42 0.54
Residential (1/4 acre)	0.22 0.30	0.26 0.34	0.29 0.37	0.24 0.33	0.29 0.37	0.33 0.42	0.27 0.36	0.31 0.40	0.36 0.47	0.30 0.38	0.34 0.42	0.40 0.52
Residential (1/3 acre)	0.19 0.28	0.23 0.32	0.26 0.35	0.22 0.30	0.26 0.35	0.30 0.39	0.25 0.33	0.29 0.38	0.34 0.45	0.28 0.36	0.32 0.40	0.39 0.50
Residential (1/2 acre)	0.16 0.25	0.20 0.29	0.24 0.32	0.19 0.28	0.23 0.32	0.28 0.36	0.22 0.31	0.27 0.35	0.32 0.42	0.26 0.34	0.30 0.38	0.37 0.48
Residential (1 acre)	0.14 0.22	0.19 0.26	0.22 0.29	0.17 0.24	0.21 0.28	0.26 0.34	0.20 0.28	0.25 0.32	0.31 0.40	0.24 0.31	0.29 0.35	0.35 0.46
Industrial	0.67 0.85	0.68 0.85	0.68 0.86	0.68 0.85	0.88 0.86	0.69 0.86	0.68 0.86	0.69 0.86	0.69 0.87	0.69 0.86	0.69 0.86	0.70 0.88
Commercial	0.71 0.88	0.71 0.88	0.72 0.89	0.71 0.89	0.72 0.89	0.72 0.89	0.72 0.89	0.72 0.89	0.72 0.90	0.72 0.89	0.72 0.89	0.72 0.90
Streets	0.70 0.76	0.71 0.77	0.72 0.79	0.71 0.80	0.72 0.82	0.74 0.84	0.72 0.84	0.73 0.85	0.76 0.89	0.73 0.89	0.75 0.91	0.78 0.95
Open space	0.05 0.11	0.10 0.16	0.14 0.20	0.08 0.14	0.13 0.19	0.19 0.26	0.12 0.18	0.17 0.23	0.24 0.32	0.16 0.22	0.21 0.27	0.28 0.39
Parking	0.85 0.95	0.86 0.96	0.87 0.97	0.85 0.95	0.86 0.96	0.87 0.97	0.85 0.95	0.86 0.96	0.87 0.97	0.85 0.95	0.86 0.96	0.87 0.97

NOTES:

^a Runoff coefficients for storm recurrence intervals less than 25 years.

^b Runoff coefficients for storm recurrence intervals of 25 years or more.

Source: Rawls, W.J., S.L. Long, and R.H. McCuen, 1981. Comparison of Urban Flood Frequency Procedures. Preliminary Draft Report prepared for the Soil Conservation Service, Beltsville, Maryland.

SWATARA CODE

Table C-2: Runoff Curve Numbers [from NRCS (SCS) TR-55]

Runoff Curve Numbers for Urban Areas

Cover Description		Curve Numbers for Hydrologic Soil Groups			
Cover Type and Hydrologic Condition	Average Percent Impervious Area	A	B	C	D
Fully developed urban areas (vegetation established)					
Open space (lawns, parks, golf courses, etc.):					
Poor condition (grass cover < 50%)		68	79	86	89
Fair condition (grass cover 50% to 75%)		49	69	79	84
Good condition (grass cover > 75%)		39	61	74	80
Impervious areas:					
Paved parking lots, roofs, driveways, etc.		98	98	98	98
Streets and roads:					
Paved: curbed and storm sewers		98	98	98	98
Paved: open ditches		83	89	92	93
Gravel		76	85	89	91
Dirt		72	82	87	89
Urban districts:					
Commercial and business	85%	89	92	94	95
Industrial	72%	81	88	91	93
Residential districts by average lot size:					
1/8 acre or less	65%	77	85	90	92
1/4 acre	38%	61	75	83	87
1/3 acre	30%	57	72	81	86
1/2 acre	25%	54	70	80	85
1 acre	20%	51	68	79	84
2 acres	12%	46	65	77	82

STORMWATER MANAGEMENT

Runoff Curve Numbers for Cultivated Agricultural Lands

Cover Description			Curve Numbers for Hydrologic Soil Groups				
Cover Type	Treatment	Hydrologic Condition	A	B	C	D	
Fallow	Bare soil	—	77	86	91	94	
	Crop residue cover (CR)	Poor	76	85	90	93	
Good		74	83	88	90		
Row crops	Straight row (SR)	Poor	72	81	88	91	
		Good	67	78	85	89	
	SR + CR	Poor	71	80	87	90	
		Good	64	75	82	85	
	Contoured (C)	Poor	70	79	84	88	
		Good	65	75	82	86	
	C + CR	Poor	69	78	83	87	
		Good	64	74	81	85	
	Contoured and terraced (C & T)	Poor	66	74	80	82	
		Good	62	71	78	81	
	C & T + CR	Poor	65	73	79	81	
		Good	61	70	77	80	
	Small grain	SR	Poor	65	76	84	88
			Good	63	75	83	87
SR + CR		Poor	64	75	83	86	
		Good	60	72	80	84	
C		Poor	63	74	82	85	
		Good	61	73	81	84	
C + CR		Poor	62	73	81	84	
		Good	60	72	80	83	
C & T		Poor	61	72	79	82	
		Good	59	70	78	81	
C & T + CR		Poor	60	71	78	81	
		Good	58	69	77	80	
Close seeded or broadcast legumes or rotation meadow		SR	Poor	66	77	85	89
			Good	58	72	81	85
	C	Poor	64	75	83	85	
		Good	55	69	78	83	
	C & T	Poor	63	73	80	83	
		Good	51	67	76	80	

SWATARA CODE

Runoff Curve Numbers for Other Agricultural Lands

Cover Description		Curve Numbers for Hydrologic Soil Groups			
Cover Type	Hydrologic Condition	A	B	C	D
Pasture, grassland or range – continuous forage for grazing	Poor	68	79	86	89
	Fair	49	69	79	84
	Good	39	61	74	80
Meadow – continuous grass, protected from grazing and generally mowed for hay	—	30	58	71	78
Brush – brush, weed, grass mixture, with brush the major element	Poor	48	67	77	83
	Fair	35	56	70	77
	Good	30	48	65	73
Woods – grass combination (orchard or tree farm)	Poor	57	73	82	86
	Fair	43	65	76	82
	Good	32	58	72	79
Woods	Poor	45	66	77	83
	Fair	36	60	73	79
	Good	30	55	70	77
Farmsteads – buildings, lanes, driveways and surrounding lots	—	59	74	82	86

STORMWATER MANAGEMENT

Table C-3: Manning's Equation "n" Roughness Coefficients

Description	Manning's "n"
Smooth-wall plastic pipe	0.011
Concrete pipe	0.012
Smooth-lined corrugated metal pipe	0.012
Corrugated plastic pipe	0.024
Annular corrugated steel and aluminum alloy pipe (plain or polymer coated):	
68 mm x 13 mm (2 2/3 inch x 1/2 inch) corrugations	0.024
75 mm x 25 mm (3 inch x 1 inch) corrugations	0.027
125 mm x 25 mm (5 inch x 1 inch) corrugations	0.025
150 mm x 50 mm (6 inch x 2 inch) corrugations	0.033
Helically corrugated steel and aluminum alloy pipe (plain or polymer coated):	
75 mm x 25 mm (3 inch x 1 inch), 125 mm x 25 mm (5 inch x 1 inch), or 150 mm x 50 mm (6 inch x 2 inch) corrugations	0.024
Helically corrugated steel and aluminum alloy pipe (plain or polymer coated):	
68 mm x 13 mm (2 2/3 inch x 1/2 inch) corrugations:	
a. Lower coefficients:*	
450 mm (18 inch) diameter	0.014
600 mm (24 inch) diameter	0.016
900 mm (36 inch) diameter	0.019
1,200 mm (48 inch) diameter	0.020
1,500 mm (60 inch) diameter or larger	0.021
b. Higher coefficients**	0.024
Annular or helically corrugated steel or aluminum alloy pipe arches or other noncircular metal conduit (plain or polymer coated)	0.024
Vitrified clay pipe	0.012
Ductile iron pipe	0.013
Asphalt pavement	0.015
Concrete pavement	0.014
Grass medians	0.050
Grass (residential)	0.030
Earth	0.020

SWATARA CODE

Description	Manning's "n"
Gravel	0.030
Rock	0.035
Cultivated areas	0.030 to 0.050
Dense brush	0.070 to 0.140
Heavy timber (little undergrowth)	0.100 to 0.150
Heavy timber (with underbrush)	0.40
Streams:	
Some grass and weeds (little or no brush)	0.030 to 0.035
Dense growth of weeds	0.035 to 0.050
Some weeds (heavy brush on banks)	0.050 to 0.070

NOTES:

- * Use the lower coefficient if any one of the following conditions apply:
 - a. A storm pipe longer than 20 diameters, which directly or indirectly connects to an inlet or manhole, located in swales adjacent to shoulders in cut areas, shoulders in cut areas or depressed medians.
 - b. A storm pipe which is specially designed to perform under pressure.
- ** Use the higher coefficient if any one of the following conditions apply:
 - a. A storm pipe which directly or indirectly connects to an inlet or manhole located in highway pavement sections or adjacent to curb or concrete median barrier.
 - b. A storm pipe which is shorter than 20 diameters long.
 - c. A storm pipe which is partly lined helically corrugated metal pipe.

STORMWATER MANAGEMENT

Table C-4: Manning's Equation "n" Roughness Coefficients for TR-55 Time of Concentration Calculations (sheet flow)

Surface Description	Manning's "n" ¹
Smooth surfaces (concrete, asphalt, gravel, or bare soil)	0.011
Fallow (no residue)	0.050
Cultivated soils:	
Residue cover (less than or equal to 20%)	0.060
Residue cover (greater than 20%)	0.170
Grass:	
Short grass prairie	0.150
Dense grasses ²	0.240
Bermuda grass	0.410
Range (natural)	0.130
Woods: ³	
Light underbrush	0.400
Dense underbrush	0.800


NOTES:

¹ The "n" values are a composite of information compiled by Engman (1986).

² Includes species such as weeping lovegrass, bluegrass, buffalo grass, blue grama grass, and native grass mixtures.

³ When selecting "n," consider cover to a height of about 0.1 foot. This is the only part of the plant cover that will obstruct sheet flow.

APPENDIX D
MINOR SWM PERMIT SITE DESIGN WORKSHEET

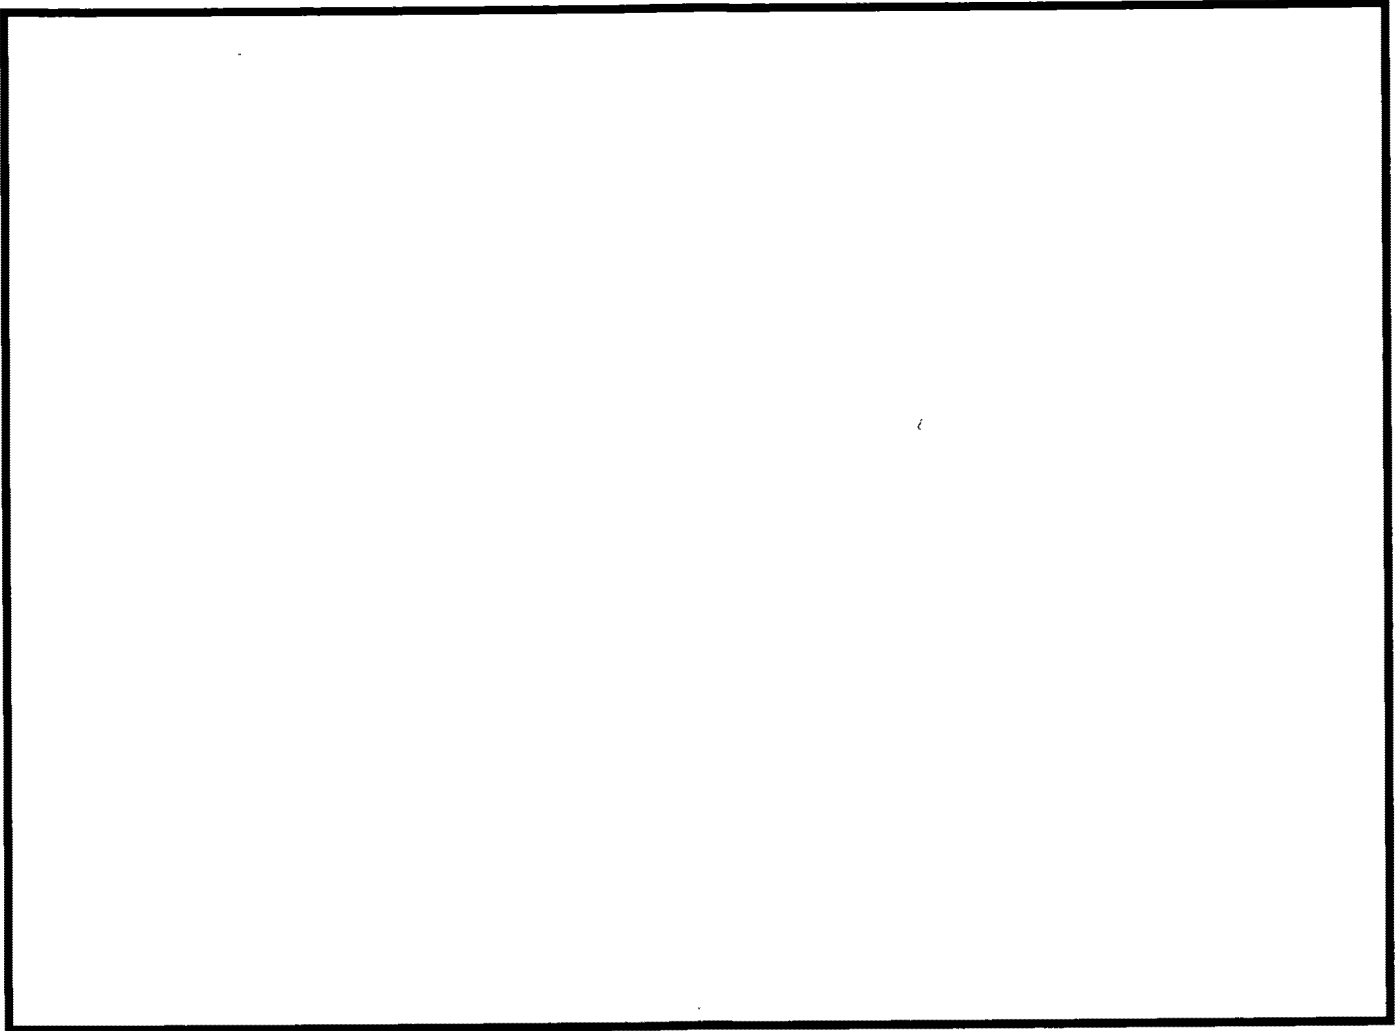


Draw a general site plan including the following: 1. The general layout of the property, including approximate lot lines and existing improvements; 2. All proposed improvements; 3. Flow arrows showing the direction of runoff; 4. The location of the proposed stormwater facilities. An example site plan is available on the following page.

By submitting this worksheet, the applicant agrees:

1. To submit a Minor SWM Permit for Municipal approval with this Site Design Worksheet.
2. To direct all runoff from proposed impervious areas to the proposed stormwater facilities.
3. To construct the stormwater facilities in conformance with the details and calculations within this worksheet.
4. That the proposed regulated activity conforms to the requirements of the Swatara Township Stormwater Management Ordinance, including but not limited to the provision of a 15 foot setback for stormwater facilities, and an O&M agreement.
5. That stormwater flows onto adjacent properties shall not be created, increased, relocated, significantly concentrated, or otherwise detrimentally altered without written approval from the affected property owner(s).
6. That stormwater management facilities are permanent fixtures and may not be modified, removed, filled, landscaped, have improvements placed within them, or otherwise be altered without written approval of Swatara Township.
7. To provide Swatara Township or its representatives access to the property for the purposes of inspecting SWM and ESC facilities.
8. That all construction shall follow the PADEP BMP Manual and E&S Manual, and that an E&S plan will be sent to the Dauphin County Conservation District for review of adequacy if earth disturbance is equal to or greater than 5,000 square feet.
9. That identification of sensitive natural features, such as wetlands or karst features, is the applicant's responsibility, and that sensitive natural features on the site will not be encroached upon without proper permitting and/or Municipal approval.
10. That Swatara Township and its representatives bear no design responsibility for the proposed improvements, including proposed SWM facilities. All design responsibility is borne by the applicant, and the applicant should consult with a professional if desired.
11. That the designs produced by utilizing this worksheet are likely conservative in nature.
12. To indemnify Swatara Township and its representatives from any damage that may result from the proposed improvements, including stormwater management facilities.


Signature of Applicant: _____ Date: _____

Example Minor SWM Permit Site Plan

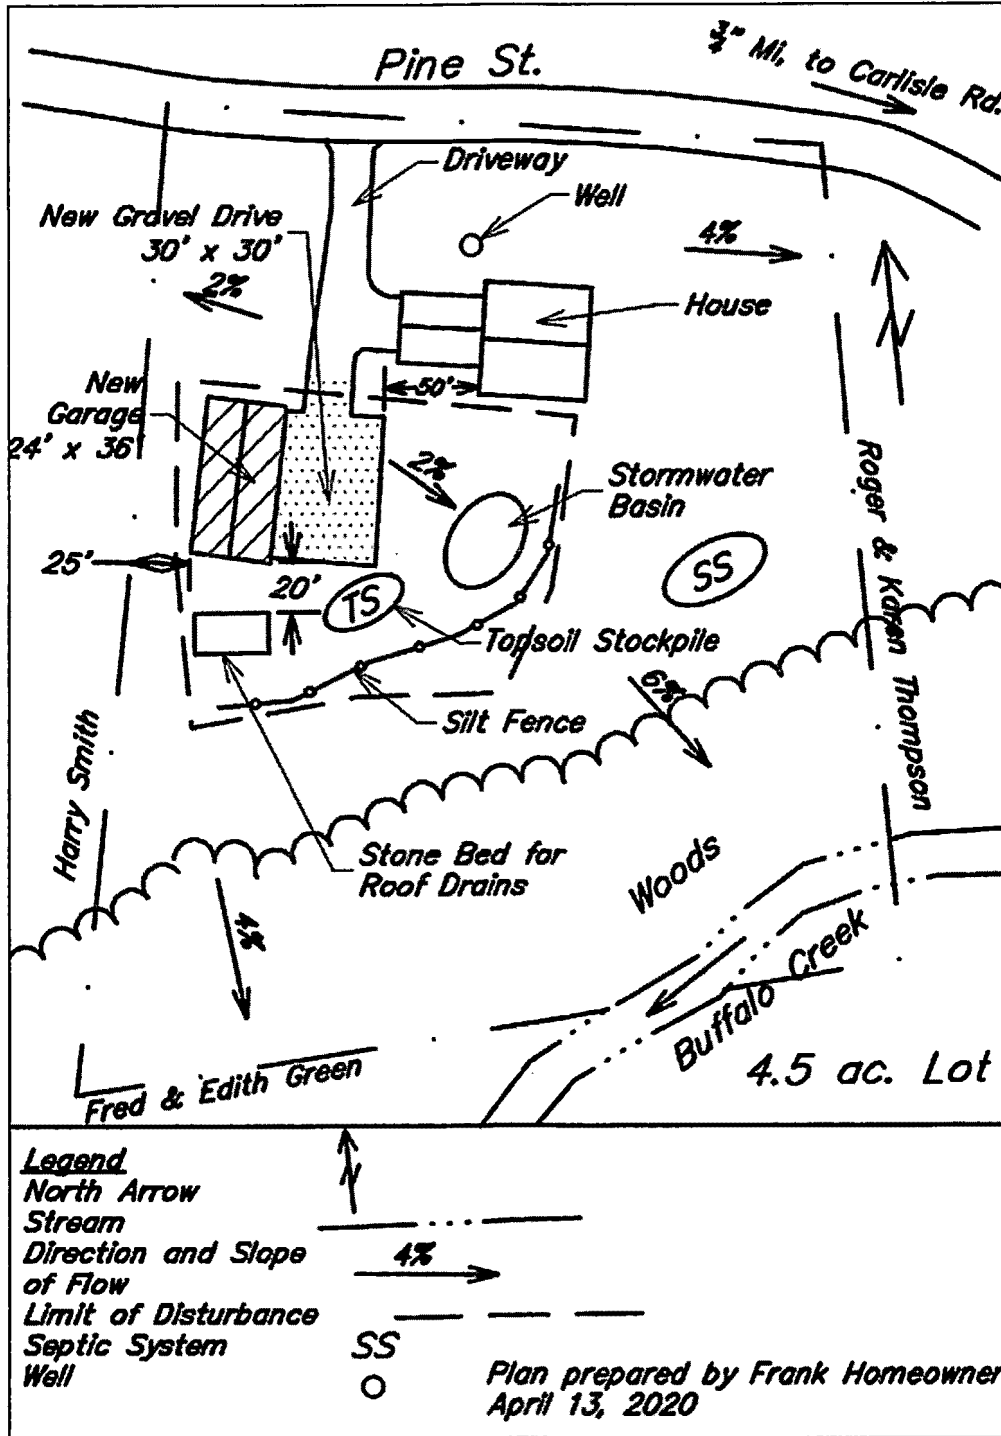

Stormwater Facility Standard Details

Rain Garden

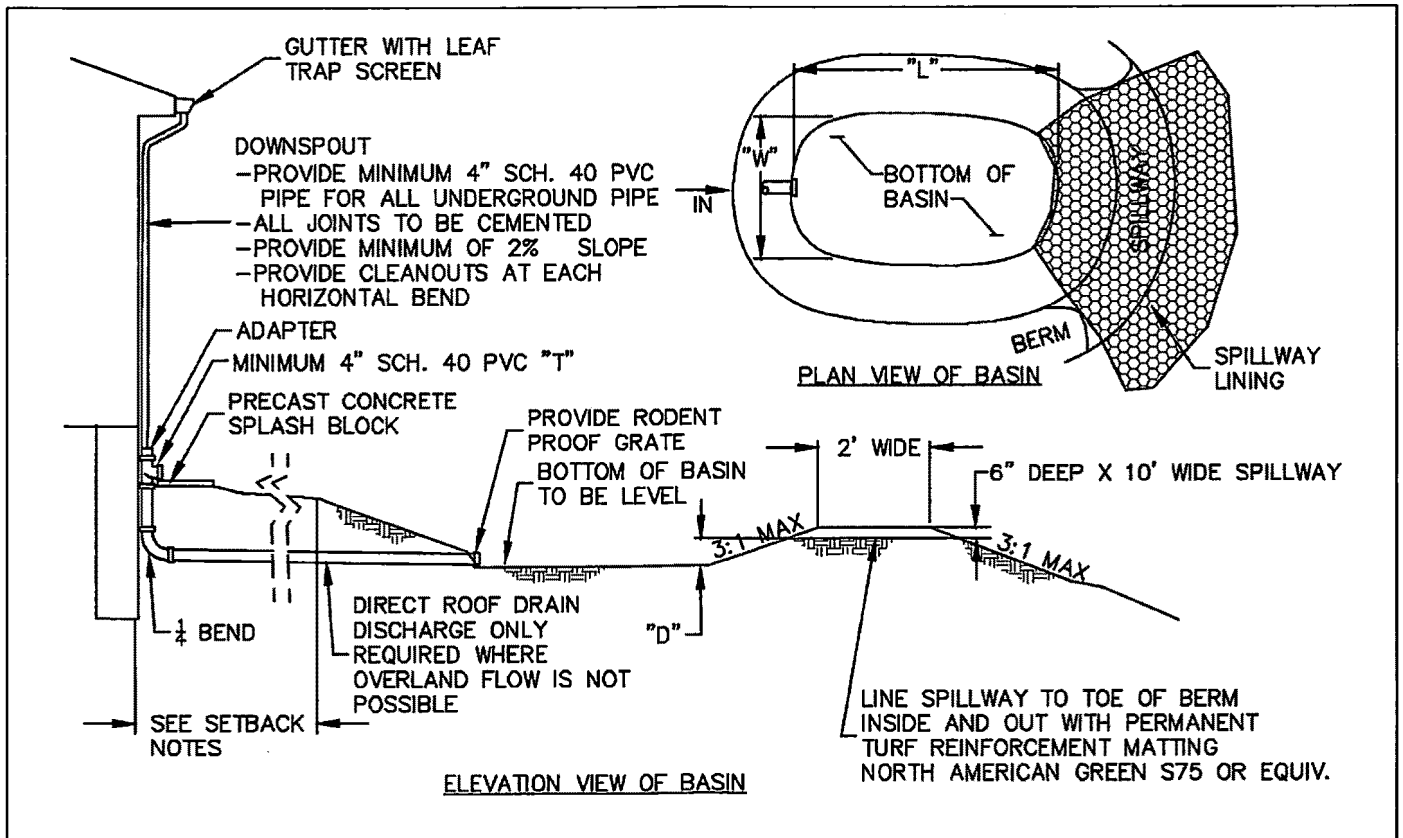

Notes

- NOTE 1: Infiltration trenches may only be used for structures; infiltration basins may be used for all surfaces, including structures.
- NOTE 2: Infiltration basins deeper than 3 feet must be fenced.
- NOTE 3: No stormwater facility may be deeper than 6 feet.
- NOTE 4: Any infiltration facilities located within HSG D, shall provide infiltration testing results that show adequate infiltration rates. See Appendix E for HSG map.


The following inspections shall be completed during the construction phase by the Municipality or their designee to receive full release of the posted bond:

1. Rough Excavation & Grading of the Rain Garden
2. Final Grading and Seeding - Established grass growth must be present at time of inspection to receive approval

The landowner or their designee shall be responsible for notifying the Municipality of the readiness for each scheduled inspection.

Stormwater Facility Standard Details

Infiltration Trench

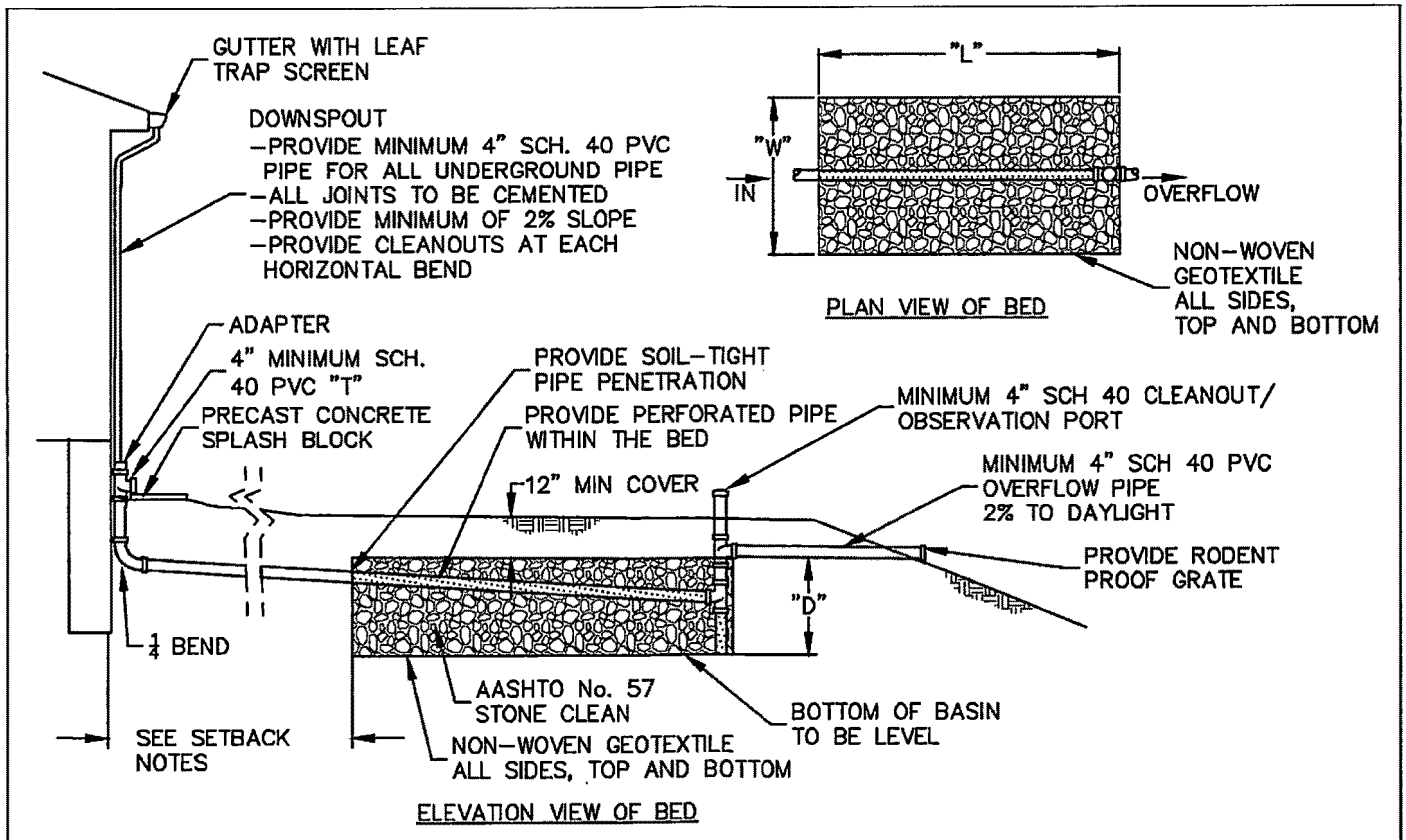

NOTE 1: Infiltration trenches may only be used for structures; infiltration basins may be used for all surfaces, including structures.

NOTE 2: Infiltration basins deeper than 3 feet must be fenced.

NOTE 3: No stormwater facility may be deeper than 6 feet.

NOTE 4: Any infiltration facilities located within HSG D, applicant shall provide infiltration testing results that show adequate infiltration rates (minimum 0.5 inches per hour). See Appendix E for HSG map.

The following Inspections shall be completed during the construction phase by the Municipality or their designee to receive full release of the posted bond:

1. Rough Excavation of the Infiltration Trench
2. Installed Piping and Stone Backfill Wrapped in Geotextile
3. Final Grading and Seeding - Established grass growth must be present at time of inspection to receive approval

The landowner or their designee shall be responsible for notifying the Municipality of the readiness for each scheduled inspection.

Disconnected Impervious Area (DIA)

When rooftop or pavement runoff is directed to a pervious area that allows for infiltration, filtration, and increased time of concentration, the contributing rooftop or pavement area may qualify as a Disconnected Impervious Area (DIA). A rooftop or pavement area is considered to be a DIA if it meets the requirements listed below:

- The soil in proximity of the discharge area, is not designated as hydrologic soil group "D" or equivalent (see Appendix F – Hydrologic Soil Group Map).
- The overland flow path (pervious area serving as BMP) from discharge area has a positive slope of 10% or less.
- The length of overland flow path (pervious area serving as BMP) is greater than or equal to the contributing rooftop or pavement length.
- The length of overland flow path (pervious area serving as BMP) is greater than 25 feet.

If the discharge is concentrated at one or more discrete points, no more than 1,000 square feet of impervious area may discharge to any one point. In addition, a gravel strip or other spreading device is required for concentrated discharges. For non-concentrated discharges along the edge of pavement, this requirement is waived; however, there must be a provision for the establishment of vegetation along the pavement edge and temporary stabilization of the area until vegetation becomes stabilized.

If rainspouts are discharged underground to provide infiltration, the portion of the impervious area draining to those rainspouts is waived from the DIA discharge requirements. Rainspouts discharged underground which are directly connected to a storm sewer system are not waived from the DIA requirements.

See Attached Disconnected Impervious Area worksheet.

Disconnected Impervious Area (DIA) Worksheet

Applicant Address:	Brief Description of Project:				
Nearest Waterbody:	No more than 1,000 sq. ft can discharge to one point on the surface. Number of discharge points required:				
Total Proposed Impervious Area(A):	Discharge Point 1	Discharge Point 2	Discharge Point 3	Discharge Point 4	Discharge Point 5
	Area:	Area:	Area:	Area:	Area:
Total Earth Disturbance:					
Are rainspouts discharged underground? (Y/N)	Impervious Path Length:	Impervious Path Length:	Impervious Path Length:	Impervious Path Length:	Impervious Path Length:
	Pervious Path Length:	Pervious Path Length:	Pervious Path Length:	Pervious Path Length:	Pervious Path Length:
If yes, contributing impervious area (B):					
Total Impervious Area Discharged on Surface (A) – (B)	Pervious Path Slope <10%? (Y/N)	Pervious Path Slope <10%? (Y/N)	Pervious Path Slope <10%? (Y/N)	Pervious Path Slope <10%? (Y/N)	Pervious Path Slope <10%? (Y/N)
HSG Soil Group from Appendix E – Hydrologic Soils Group Map (Cannot be “D” Soils):					
Project Sketch: Only show discharge points, slopes, and pervious flow path lengths:					

Stormwater Facility Calculations

How to calculate the size of your stormwater facility

1. Determine the area of your property available for the installation of stormwater facilities in terms of length and width (in feet). If large areas of your property are available, determine how much you would like to dedicate to the installation of stormwater facilities in terms of length and width.
2. Enter the length and width chosen into #1 in the table below, and multiply them together. This will tell you the area (in square feet) that your stormwater facility will take up.
3. Determine the area of impervious surfaces you are proposing to construct that will discharge into the stormwater facility. For example, a 30 foot x 40 foot garage would be 1200 square feet. For surfaces that are not simple geometric shapes, you may need to get the area of impervious surfaces from your contractor.
4. Enter the area of impervious surfaces into #2 in the table below, and multiply this by 0.2. This will tell you the volume of stormwater runoff the impervious surfaces are generating (in cubic feet).
5. Enter the runoff volume (#2 below) and the stormwater facility area (#1 below) into #3 in the table below. Divide #2 by #1. This will tell you how deep (in feet) your stormwater facility will need to be if it is an infiltration basin. **If you are proposing to construct an infiltration basin, skip step 6 and proceed to step 7.**
6. **If you are proposing to construct an infiltration trench**, enter the facility depth (#3 below) into #4 in the table below, and divide by 0.4. This will tell you how deep (in feet) your stormwater facility will need to be since it is using stone. Stone takes up approximately 60% of the volume within an infiltration trench, so only 40% of the volume of the infiltration trench is available to store stormwater. Dividing by 0.4 compensates for this loss of storage.
7. If your stormwater facility depth is greater than 6 feet, you will need to expand the area for the stormwater facility determined in #1 above, and repeat the above process until the depth is equal to or less than 6 feet.

Facility Name or #	1: Facility Area	_____ (L) x _____ (W)	SF
	2: Runoff Volume	_____ (Imp. Area to Facility) x 0.2	CF
	3: Facility Depth	_____ (#2) / _____ (#1)	F
	4: Depth w/ Stone	(TRENCHES ONLY) _____ (#3) / 0.4	F

NOTE: Extra tables provided below for repeat calculations or for extra facilities.

Facility Name or #	1: Facility Area	_____ (L) x _____ (W)	SF
	2: Runoff Volume	_____ (Imp. Area to Facility) x 0.2	CF
	3: Facility Depth	_____ (#2) / _____ (#1)	F
	4: Depth w/ Stone	(TRENCHES ONLY) _____ (#3) / 0.4	F

Facility Name or #	1: Facility Area	_____ (L) x _____ (W)	SF
	2: Runoff Volume	_____ (Imp. Area to Facility) x 0.2	CF
	3: Facility Depth	_____ (#2) / _____ (#1)	F
	4: Depth w/ Stone	(TRENCHES ONLY) _____ (#3) / 0.4	F

Facility Name or #	1: Facility Area	_____ (L) x _____ (W)	SF
	2: Runoff Volume	_____ (Imp. Area to Facility) x 0.2	CF
	3: Facility Depth	_____ (#2) / _____ (#1)	F
	4: Depth w/ Stone	(TRENCHES ONLY) _____ (#3) / 0.4	F

Stormwater Facility Bond Calculations

A bond must be posted to the Municipality as a requirement for the installation of all proposed rain gardens and infiltration trenches. This bond shall protect the municipality in the event construction of the BMP is not completed. Upon installation of the BMP and the completion of all required inspections, the bond shall be released by the Municipality.

How to calculate the bond amount required to be posted for installation of your stormwater facility

1. Utilizing the values entered into the table to determine the size of your facility, multiply the facility area (#1 below) by the facility depth (#3 below) to determine the facility volume in cubic feet (CF)
2. Convert the facility volume in cubic feet to cubic yards by dividing the facility volume value by 27.
3. Multiply the converted facility volume in cubic yards by the unit cost of dollars per cubic yard to determine the bond amount to be posted to the municipality. This unit cost value takes into account the excavation, rough grading, installation of piping, installation of stone (trenches only), final grading, and seeding of the BMP.


Rain Garden

Facility Name or #	1: Facility Area	_____ (L) x _____ (W)	SF
	2: Runoff Volume	_____ (Imp. Area to Facility) x 0.2	CF
	3: Facility Depth	_____ (#2) / _____ (#1)	F
	4: Facility Volume	_____ (#1) x _____ (#3)	CF
	5: Converted Facility Volume	_____ (#4) / 27	CY
	6: Bond Amount	_____ (#5) x 75	Dollars


Infiltration Trench

Facility Name or #	1: Facility Area	_____ (L) x _____ (W)	SF
	2: Runoff Volume	_____ (Imp. Area to Facility) x 0.2	CF
	3: Facility Depth	_____ (#2) / _____ (#1)	F
	4: Facility Volume	_____ (#1) x _____ (#3)	CF
	5: Converted Facility Volume	_____ (#4) / 27	CY
	6: Bond Amount	_____ (#5) x 100	Dollars

APPENDIX E – HYDROLOGIC SOIL GROUP MAP

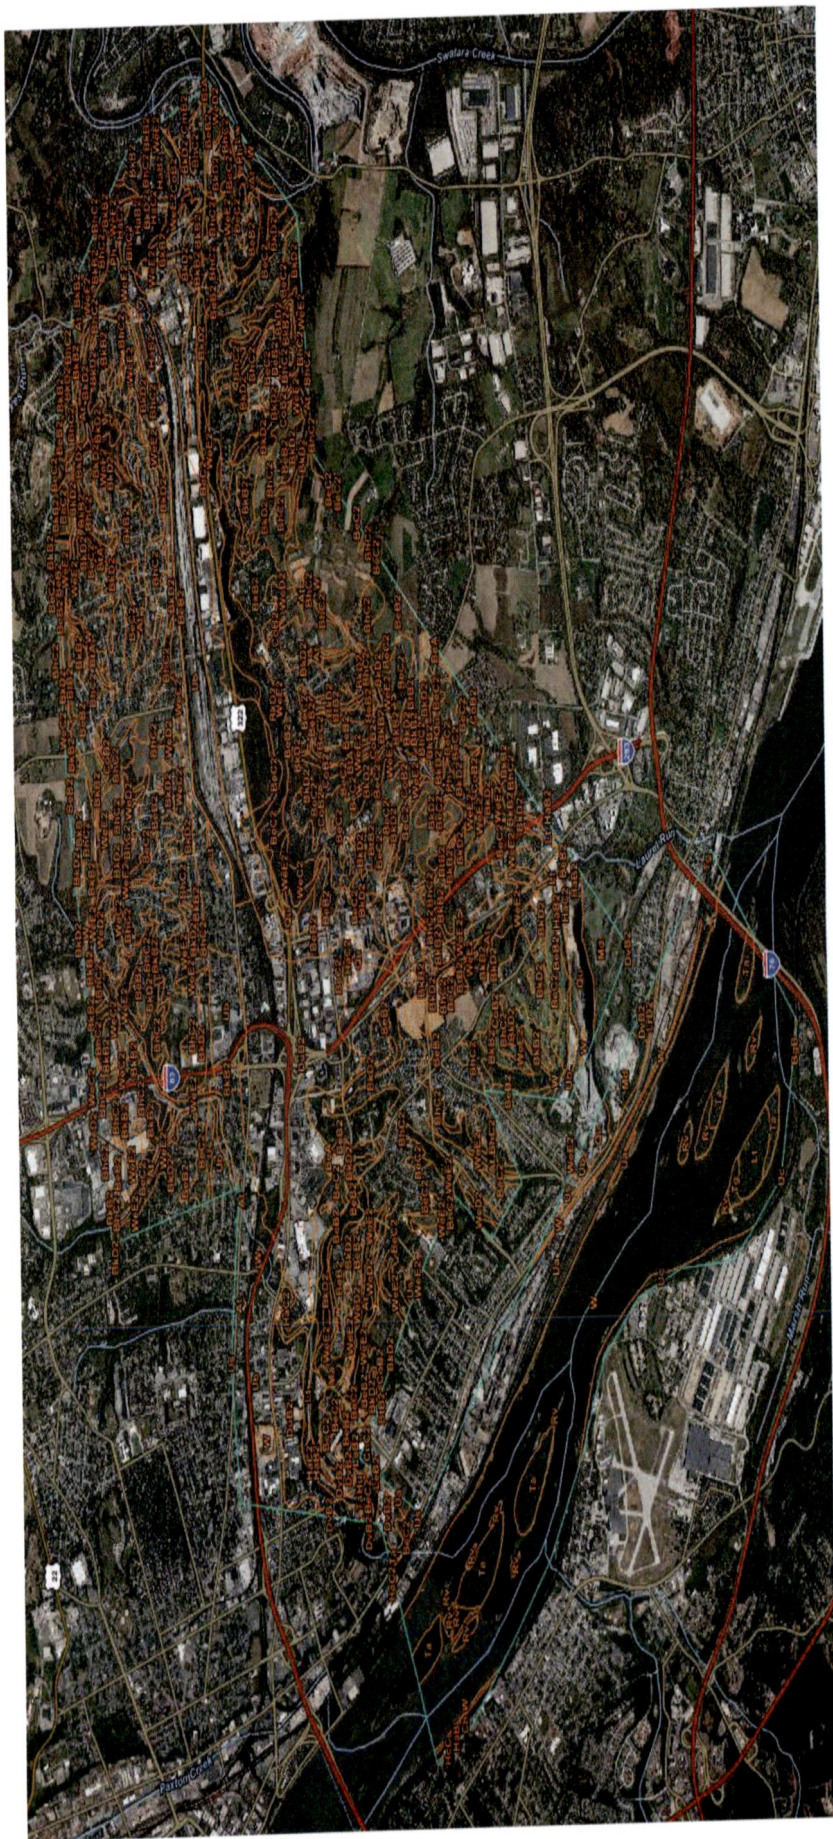

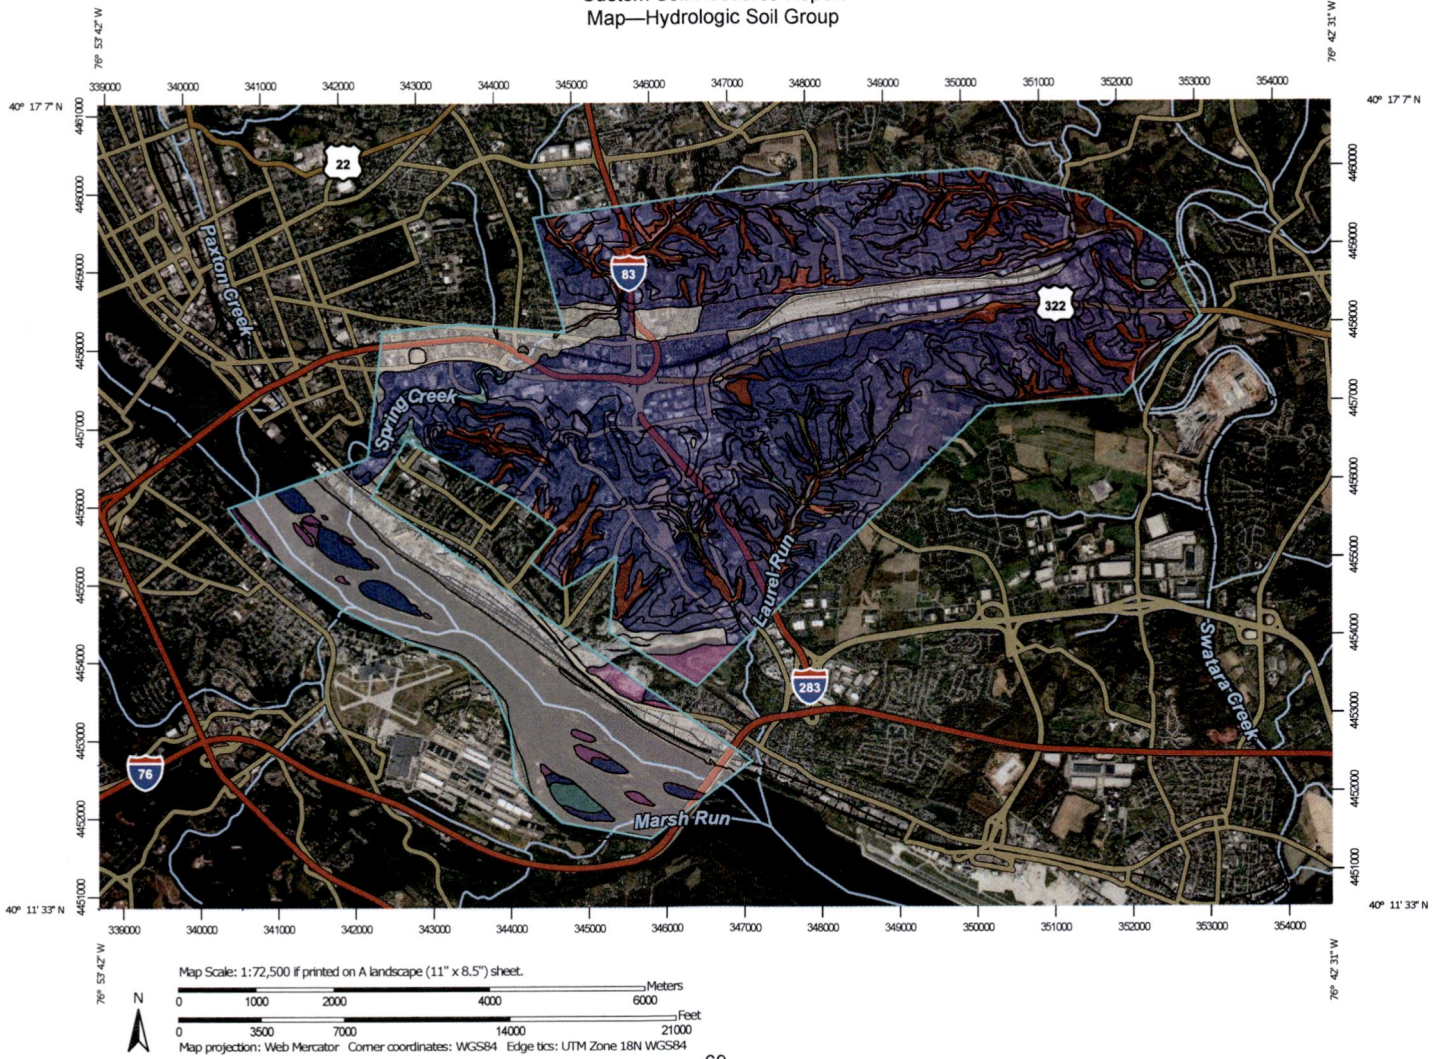































Custom Soil Resource Report
Map—Hydrologic Soil Group



Custom Soil Resource Report

MAP LEGEND

Area of Interest (AOI)		 C
 Area of Interest (AOI)		 C/D
Soils		 D
Soil Rating Polygons		 Not rated or not available
 A		Water Features
 A/D		 Streams and Canals
 B		Transportation
 B/D		 Rails
 C		 Interstate Highways
 C/D		 US Routes
 D		 Major Roads
 Not rated or not available		 Local Roads
Soil Rating Lines		Background
 A		 Aerial Photography
 A/D		
 B		
 B/D		
 C		
 C/D		
 D		
 Not rated or not available		
Soil Rating Points		
 A		
 A/D		
 B		
 B/D		

MAP INFORMATION

The soil surveys that comprise your AOI were mapped at scales ranging from 1:15,800 to 1:24,000.

Please rely on the bar scale on each map sheet for map measurements.

Source of Map: Natural Resources Conservation Service
 Web Soil Survey URL:
 Coordinate System: Web Mercator (EPSG:3857)

Maps from the Web Soil Survey are based on the Web Mercator projection, which preserves direction and shape but distorts distance and area. A projection that preserves area, such as the Albers equal-area conic projection, should be used if more accurate calculations of distance or area are required.

This product is generated from the USDA-NRCS certified data as of the version date(s) listed below.

Soil Survey Area: Cumberland County, Pennsylvania
 Survey Area Data: Version 16, Aug 31, 2021

Soil Survey Area: Dauphin County, Pennsylvania
 Survey Area Data: Version 18, Aug 31, 2021

Soil Survey Area: York County, Pennsylvania
 Survey Area Data: Version 16, Sep 1, 2021

Your area of interest (AOI) includes more than one soil survey area. These survey areas may have been mapped at different scales, with a different land use in mind, at different times, or at different levels of detail. This may result in map unit symbols, soil properties, and interpretations that do not completely agree across soil survey area boundaries.

Soil map units are labeled (as space allows) for map scales 1:50,000 or larger.

Date(s) aerial images were photographed: Jul 6, 2020—Nov 7, 2020

Custom Soil Resource Report

Table—Hydrologic Soil Group

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
Ch	Chavies fine sandy loam	A	15.6	0.1%
HaB	Hagerstown silt loam, 3 to 8 percent slopes	B	0.2	0.0%
HcC	Hagerstown silt loam, rocky, 8 to 15 percent slopes	B	1.3	0.0%
W	Water		5.1	0.0%
Subtotals for Soil Survey Area			22.3	0.2%
Totals for Area of Interest			11,961.3	100.0%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
At	Atkins silt loam	B/D	168.5	1.4%
BeA	Bedington shaly silt loam, 0 to 3 percent slopes	B	11.9	0.1%
BeB2	Bedington shaly silt loam, 3 to 8 percent slopes, moderately eroded	B	2,613.6	21.9%
BeC2	Bedington shaly silt loam, 8 to 15 percent slopes, moderately eroded	B	1,179.2	9.9%
BhC2	Berks channery silt loam, 8 to 15 percent slopes	B	942.2	7.9%
BkB2	Berks shaly silt loam, 3 to 8 percent slopes, moderately eroded	B	869.6	7.3%
BkD2	Berks channery silt loam, 15 to 25 percent slopes	B	718.8	6.0%
BtA	Brinkerton and Armagh silt loams, 0 to 3 percent slopes	C/D	21.1	0.2%
BlB2	Brinkerton and Armagh silt loams, 3 to 8 percent slopes, moderately eroded	C/D	34.6	0.3%
CmB2	Captina silt loam, 3 to 8 percent slopes, moderately eroded	C/D	18.7	0.2%
CnC2	Chavies fine sandy loam, 8 to 15 percent slopes, moderately eroded	A	0.0	0.0%
CoB2	Comly silt loam, 2 to 8 percent slopes, moderately eroded	C	31.9	0.3%

Custom Soil Resource Report

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
DuB2	Duffield silt loam, 3 to 8 percent slopes, moderately eroded	B	815.7	6.8%
DvB2	Duncannon very fine sandy loam, 3 to 8 percent slopes, moderately eroded	B	46.9	0.4%
HaB2	Hagerstown silt loam, 3 to 8 percent slopes, moderately eroded	B	92.9	0.8%
HaC2	Hagerstown silt loam, 8 to 15 percent slopes, moderately eroded	B	26.7	0.2%
Hu	Huntington silt loam, local alluvium	B	2.5	0.0%
LeB2	Lawrenceville very fine sandy loam, 2 to 8 percent slopes, moderately eroded	C	14.7	0.1%
LrD2	Lewisberry gravelly sandy loam, 15 to 25 percent slopes, moderately eroded	A	7.0	0.1%
Lt	Lindside silt loam	C	86.0	0.7%
Lw	Lindside silt loam, coal overwash	C	4.0	0.0%
Ma	Made land, sanitary fill	B	7.6	0.1%
Md	Mine dumps	A	114.6	1.0%
Ph	Philo silt loam	B/D	123.3	1.0%
Qu	Quarries		94.7	0.8%
Rv	Riverwash	A	58.5	0.5%
Ta	Tioga fine sandy loam	B	165.2	1.4%
Tg	Tioga fine sandy loam, high bottom	B	9.6	0.1%
Ua	Urban land, alluvial materials		526.3	4.4%
Ub	Urban land, limestone materials		662.5	5.5%
Us	Urban land, shale materials		29.1	0.2%
W	Water		1,566.3	13.1%
WeC2	Weikert shaly silt loam, 5 to 15 percent slopes, moderately eroded	D	63.3	0.5%
WeD2	Weikert shaly silt loam, 15 to 25 percent slopes, moderately eroded	D	57.2	0.5%

Custom Soil Resource Report

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
WeE2	Weikert shaly silt loam, 25 to 40 percent slopes, moderately eroded	D	704.0	5.9%
Subtotals for Soil Survey Area			11,888.5	99.4%
Totals for Area of Interest			11,961.3	100.0%

Map unit symbol	Map unit name	Rating	Acres in AOI	Percent of AOI
BgB	Birdsboro silt loam, 3 to 8 percent slopes	B	1.6	0.0%
Uc	Urban land		48.1	0.4%
Subtotals for Soil Survey Area			49.7	0.4%
Totals for Area of Interest			11,961.3	100.0%

Rating Options—Hydrologic Soil Group

Aggregation Method: Dominant Condition

Component Percent Cutoff: None Specified

Tie-break Rule: Higher