
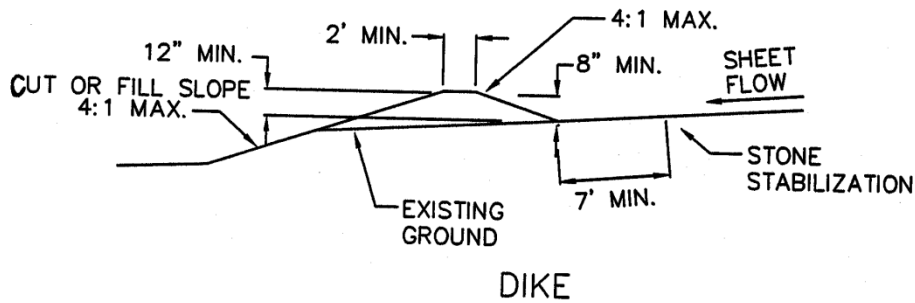


SUBDIVISION REGULATIONS

410 Attachment 6

DRAWING 30

DIVERSION DIKE AND SWALE

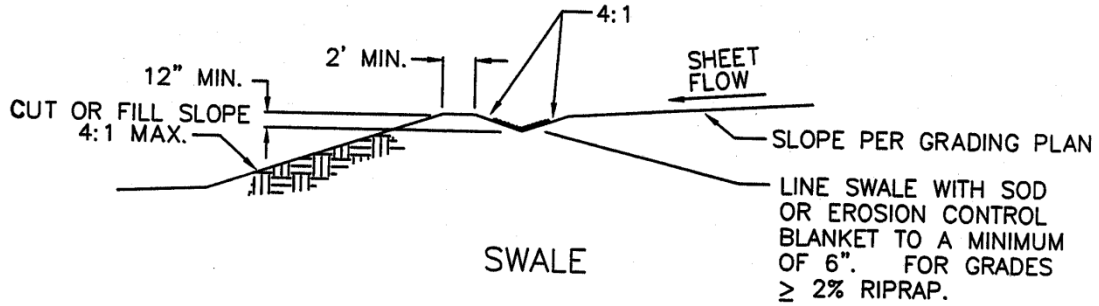

NOTES:

1. DIKE SHALL BE COMPACTED TO DENSITY EQUAL TO THAT SPECIFIED FOR ADJOINING AREA (90% STANDARD PROCTOR DENSITY, MINIMUM).
2. MINIMUM 1% GRADE MUST BE PROVIDED FOR SWALE OR ALONG UP SLOPE SIDE OF DIKE FOR PROPER DRAINAGE.

**REFERENCE:** ADAPTED FROM CITY OF AUSTIN AND CITY OF TULSA EROSION AND SEDIMENTATION CONTROL MANUALS.